

Property of KOSCIUSKO COUNTY

SURVEYORS OFFICE

Address 100 W CENTER ST

COURTHOUSE, WARSAW, IN

Telephone (574) 372-2367

MICHAEL KISSINGER
SURVEYOR

TOPCON GPT-3105 W TOTAL STATION

This Book is manufactured of a High Grade
50% Rag Ledger Paper having a Water Resist-
ant Surface, and is sewed with Nylon Water-
proof Thread.

815260



SECTION CORNER FIELD BOOK 4

INDEX

STARTED JUNE 6, 2016

<u>JEFFERSON N¹/₄ CORNER SECTION 36-34-5</u>	<u>1</u>
<u>VAN BUREN SW CORNER SECTION 30-34-6</u>	<u>2</u>
<u>FRANKLIN SW CORNER SECTION 7-31-5</u>	<u>3</u>
<u>FRANKLIN NW CORNER SECTION 7-31-5</u>	<u>4</u>
<u>HARRISON SW CORNER SECTION 31-32-5</u>	<u>5</u>
<u>FRANKLIN W¹/₄ CORNER SECTION 7-31-5</u>	<u>6</u>
<u>TIPPECANOE W¹/₄ CORNER SECTION 22-33-7</u>	<u>7</u>
<u>TURKEY CREEK CENTER OF SECTION 29-34-7</u>	<u>8</u>
<u>WAYNE W¹/₄ CORNER SECTION 8-32-6</u>	<u>9</u>
<u>FRANKLIN N¹/₄ CORNER SECTION 5-31-5</u>	<u>10</u>
<u>SEWARD NE CORNER SECTION 14-30-5</u>	<u>11</u>
<u>SEWARD E¹/₄ CORNER SECTION 14-30-5</u>	<u>12</u>
<u>SEWARD SE CORNER SECTION 14-30-5</u>	<u>13</u>
<u>SEWARD SE CORNER SECTION 2-30-5</u>	<u>14</u>
<u>PRAIRIE N¹/₄ CORNER SECTION 1-33-5</u>	<u>15</u>
<u>CLAY NE CORNER SECTION 22-31-6</u>	<u>16</u>
<u>CLAY SE CORNER SECTION 22-31-6</u>	<u>17</u>
<u>CLAY E¹/₄ CORNER SECTION 27-31-6</u>	<u>18</u>
<u>CLAY SE CORNER SECTION 27-31-6</u>	<u>19</u>
<u>WAYNE NW CORNER SECTION 13-32-5</u>	<u>20</u>
<u>WASHINGTON SW CORNER SECTION 7-32-7</u>	<u>21</u>
<u>WASHINGTON S¹/₄ CORNER SECTION 7-32-7</u>	<u>22</u>
<u>WASHINGTON SE CORNER SECTION 7-32-7</u>	<u>23</u>

WAYNE S ¹ / ₄ CORNER SECTION 12-32-5	24
WAYNE S ¹ / ₄ CORNER SECTION 11-32-5	25
LAKE SE CORNER SECTION 8-30-6	26
LAKE S ¹ / ₄ CORNER SECTION 8-30-6	27
PRAIRIE NW CORNER SECTION 30-33-5	28
SEWARD NE CORNER SECTION 27-31-5	29
SEWARD E ¹ / ₄ CORNER SECTION 27-31-5	30
SEWARD SW CORNER SECTION 27-31-5	31
PLAIN S ¹ / ₄ CORNER SECTION 36-33-6	32
WASHINGTON S ¹ / ₄ CORNER SECTION 8-32-7	33
WASHINGTON SE CORNER SECTION 8-32-7	34
WASHINGTON SE CORNER SECTION 9-32-7	35
WASHINGTON S ¹ / ₄ CORNER SECTION 11-32-7	36
WAYNE CENTER OF SECTION 9-32-6	37
WASHINGTON SW CORNER SECTION 11-32-7	38
WASHINGTON S ¹ / ₄ CORNER SEC 12-32-7	39
WASHINGTON SE CORNER SECTION 12-32-7	40
JEFFERSON SW CORNER SECTION 34-34-5	41
PRAIRIE W ¹ / ₄ CORNER SECTION 3-33-5	42
HARRISON SW CORNER SECTION 8-32-5	43
HARRISON SW CORNER SECTION 11-32-4	44
HARRISON N ¹ / ₄ CORNER SECTION 15-32-4	45
HARRISON SW CORNER SECTION 7-32-5	46
PRAIRIE CENTER OF SECTION 29-33-5	47
TIPPECANOE W ¹ / ₄ CORNER SECTION 25-33-7	48

HARRISON	N ¹ / ₄ CORNER SECTION	18-32-5	49
HARRISON	NW CORNER SECTION	13-32-4	50
HARRISON	N ¹ / ₄ CORNER SECTION	14-32-4	51
WAYNE	S ¹ / ₄ CORNER SECTION	8-32-6	52
WAYNE	N ¹ / ₄ CORNER SECTION	18-32-6	53
WAYNE	W ¹ / ₄ CORNER SECTION	3-32-6	54
VAN BUREN	SE CORNER SECTION	4-34-6	55
FRANKLIN	SE CORNER SECTION	11-31-4	56
PLAIN	E ¹ / ₄ CORNER SECTION	20-33-6	57
PLAIN	NE CORNER SECTION	20-33-6	58
PLAIN	N ¹ / ₄ CORNER SECTION	9-33-6	59
CLAY	E ¹ / ₄ CORNER SECTION	10-31-6	60
PRAIRIE	CENTER OF SECTION	22-33-5	61
PRAIRIE	N ¹ / ₄ CORNER SECTION	22-33-5	62
HARRISON	SE CORNER SECTION	12-32-4	63
WAYNE	S ¹ / ₄ CORNER SECTION	33-32-6	64
WAYNE	SW CORNER SECTION	33-32-6	65
CLAY	NW CORNER SECTION	2-31-6	66
CLAY	E ¹ / ₄ CORNER SECTION	3-31-6	67
CLAY	SE CORNER SECTION	10-31-6	68
CLAY	E ¹ / ₄ CORNER SECTION	15-31-6	69
WAYNE	SE CORNER SECTION	29-32-6	70
WAYNE	NW CORNER SECTION	4-32-6	71
WAYNE	NE CORNER SECTION	22-32-6	72
WAYNE	N ¹ / ₄ CORNER SECTION	22-32-6	73
WAYNE	E ¹ / ₄ CORNER SECTION	22-32-6	74


WAYNE	SE CORNER SECTION	22-32-6	75
WAYNE	CENTER OF SECTION	22-32-6	76
WAYNE	CENTER OF SECTION	23-32-6	77
WAYNE	N ¹ / ₄ CORNER SECTION	23-32-6	78

DESCRIPTION

BEARING DISTANCE


FD NAIL IN B. CAP IN REMC POLE 0577	NNW	18.81'
FD NAIL IN B. CAP IN NIPSCO POLE $\frac{937}{092}$	NNE	25.91'
SET MAG NAIL IN REMC POLE 0341	SE	62.43'
FD NAIL IN B. CAP IN REMC POLE 0340	SSE	59.82'
USC & GS BENCHMARK H 172	SE	33.6'

JEFFERSON

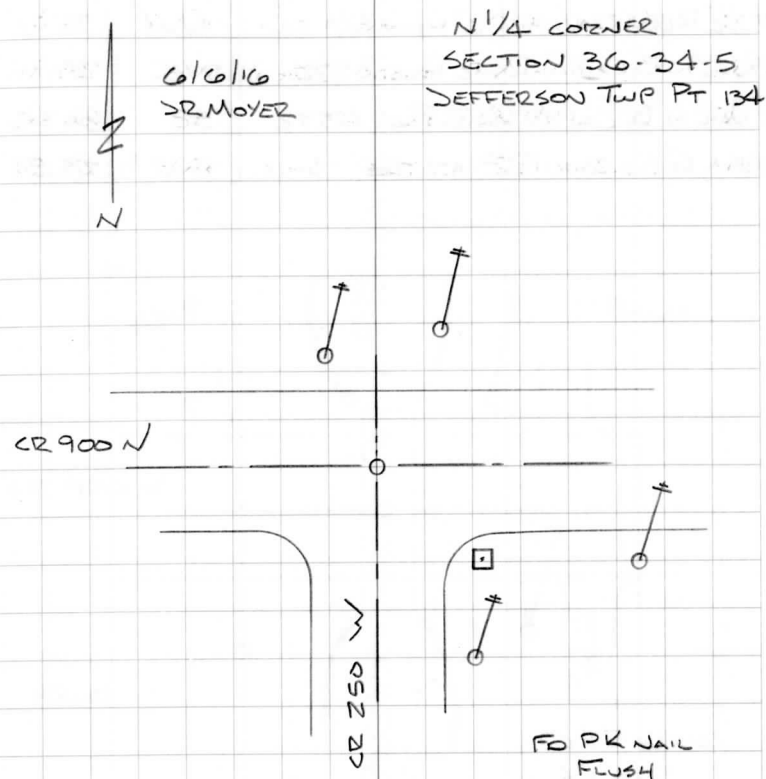

DESCRIPTION	BEARING	DISTANCE
SET 1/2" REBAR W/CAP 6' FROM E/P	NW	32.21'
FO NAIL IN B. CAP IN REMC POLE 0572	NE	27.02'
FO NAIL IN B. CAP IN REMC POLE 0573	SE	30.62'
4 DFA 6" SQ CONC FCP AT TOP	SW	27.59'

VAN BUREN

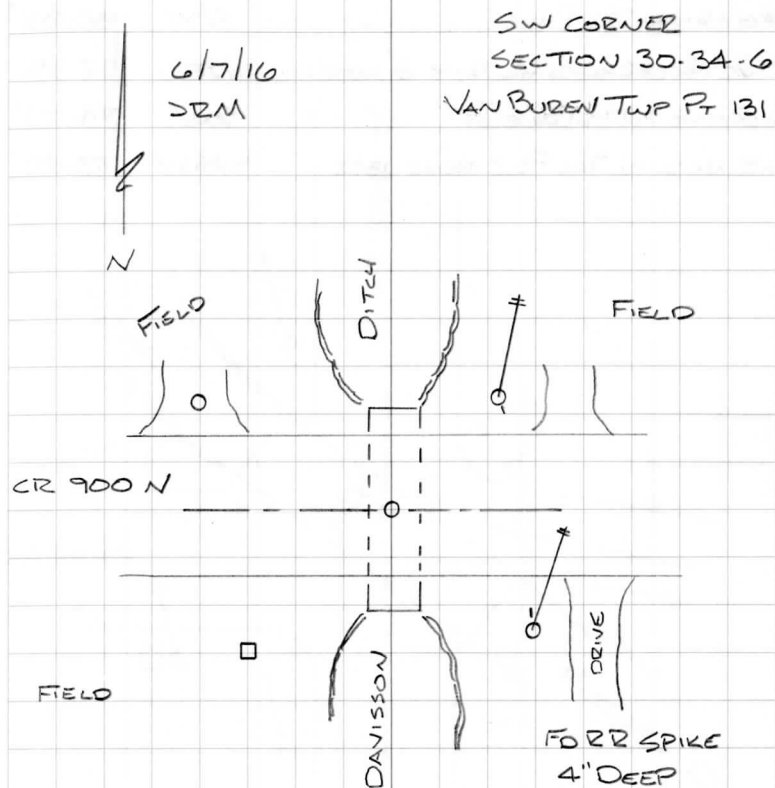


DESCRIPTION

BEARING DISTANCE

MAG NAIL IN TEL POLE	NW	80.85'
SET 1/2" REBAR W/CAP PAST GUARDRAIL	NE	32.35'
MAG NAIL IN P. POLE	SW	74.29'
MAG NAIL IN TEL POLE RENC 1352	WSW	73.50'


FRANKLIN

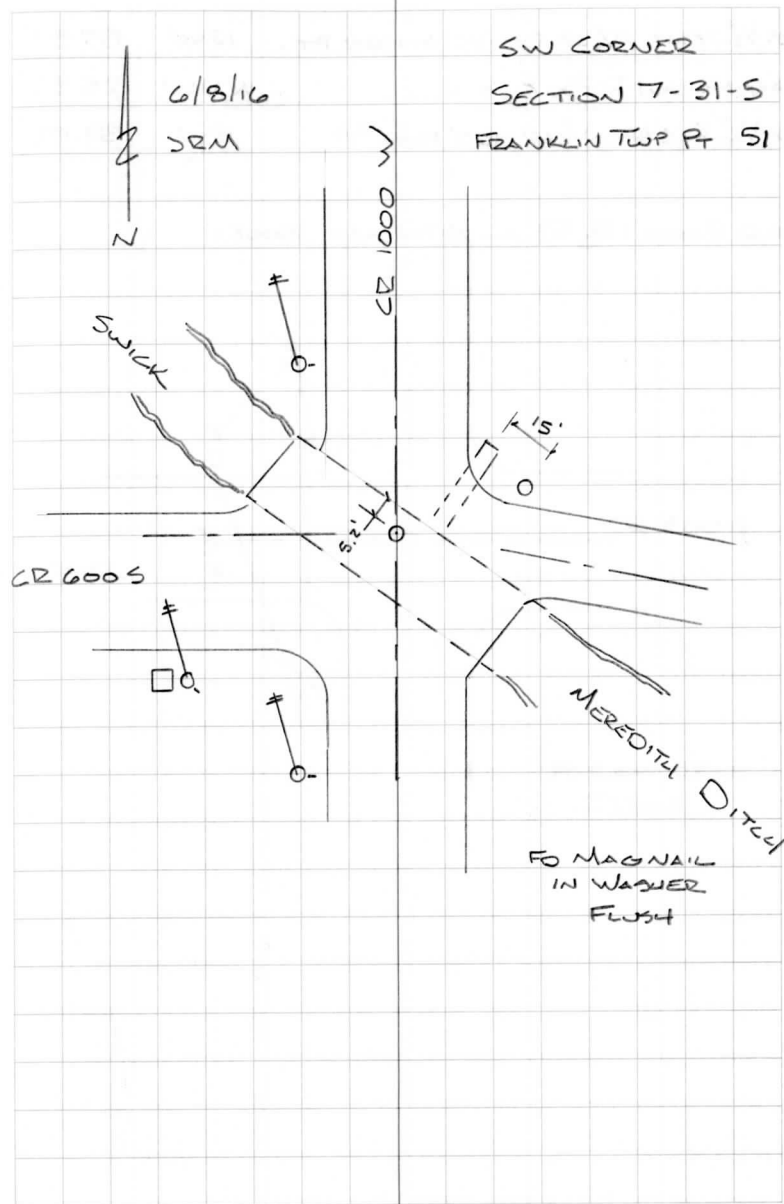

DESCRIPTION	BEARING	DISTANCE
SET 1/2" REBAR W/CAP BESIDE ANCHOR PT	NW	37.52'
MAG NAIL IN P. POLE	NNW	25.37'
SET 1/2" REBAR W/CAP 16.7' FROM E/P	SW	39.05'

FIELD BOOK 1 Pg 53 ALL WITNESSES GONE


FRANKLIN

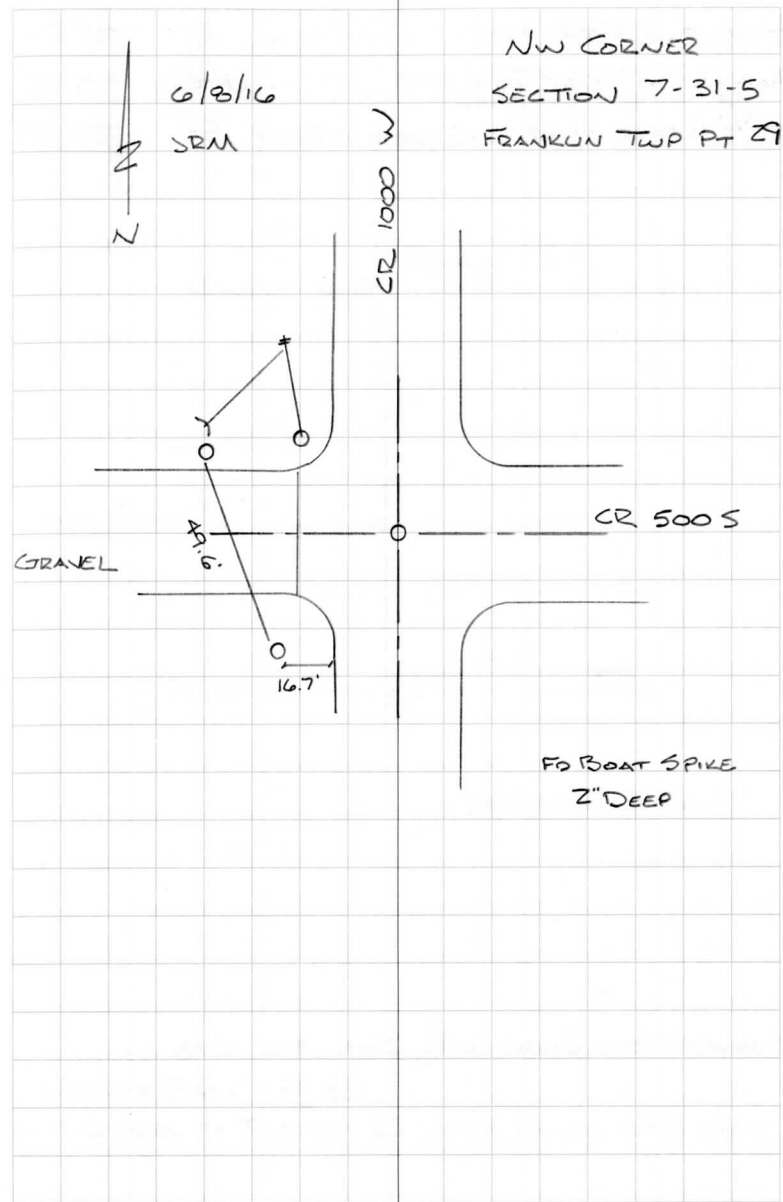

DESCRIPTION	BEARING	DISTANCE
RR RAIL FCP	N	21.55'
MAG NAIL IN REMC POLE 1132	NE	35.35'
SET 1/2" REBAR W/CAP 0.6' NORTH OF FENCE	SE	28.69'

SURVEY FIELD BOOK 6 Pg 26A 1972 CMB

HARRISON

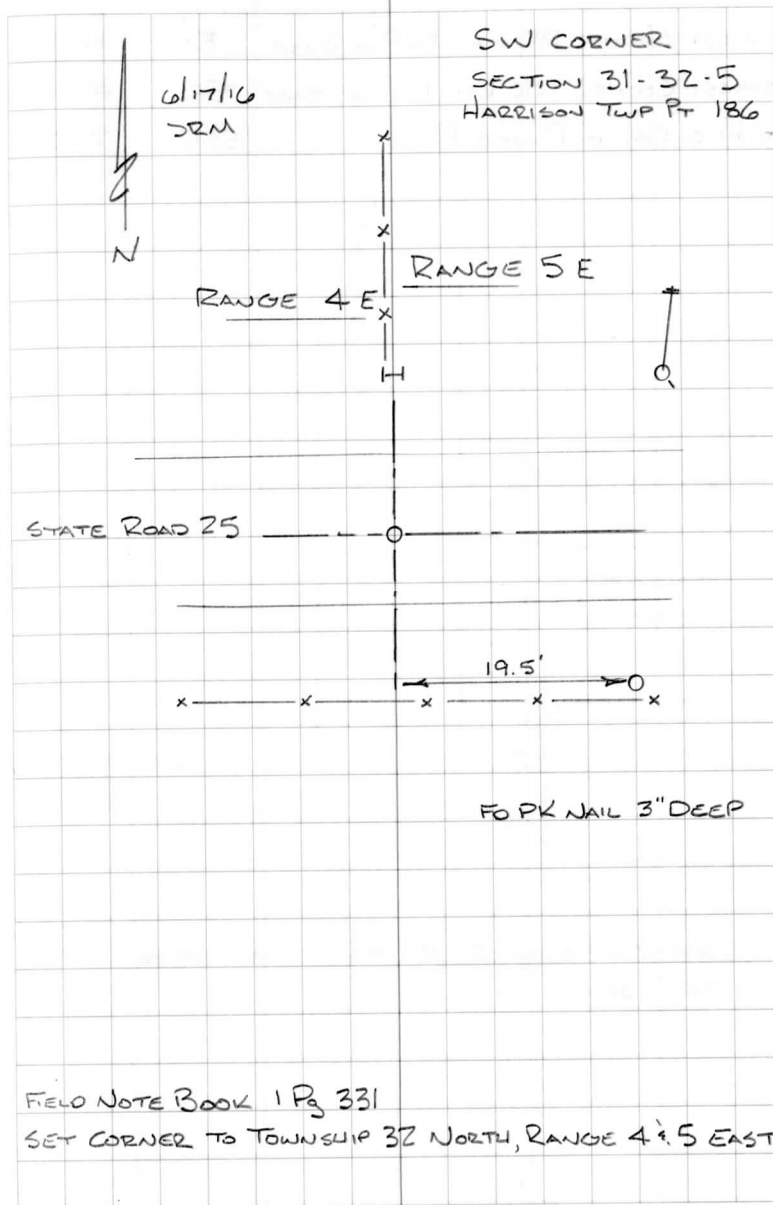

FIELD NOTE BOOK 1 Pg 331

SET CORNER TO TOWNSHIP 32 NORTH, RANGE 4 & 5 EAST

DESCRIPTION	BEARING	DISTANCE
NEAREST CORNER RR RAIL FCP AT BASE	E	19.97'
NEAREST CORNER RR RAIL FCP AT BASE	SE	42.50'
NAIL IN B. CAP IN POWER POLE	SSE	75.25'

FRANKLIN

6




6/17/16
SRM

W 1/4 CORNER
SECTION 7-31-5
FRANKLIN TWP PT 38

SR 1000 W

FO RR SPIKE
2" DEEP

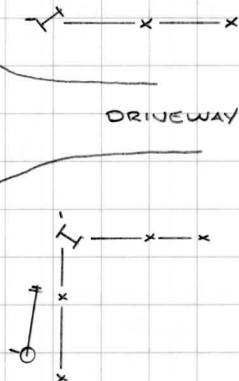

SURVEY RECORD BOOK 2 (COPY) Pg 115 CALLS FOR STONE
JUNE 19, 1857

C DESCRIPTION

NEAR NAIL IN B. CAP IN NIPSCO POLE 636/631

NEAR NAIL IN B. CAP IN TEL POLE

NAIL 1

BEARING DISTANCE

SW 30.06'

SE 21.02'

TIPPECANOE




6/20/16

SRM

W 1/4 CORNER

SECTION 22-33-7

TIPPECANOE TWP PT 98

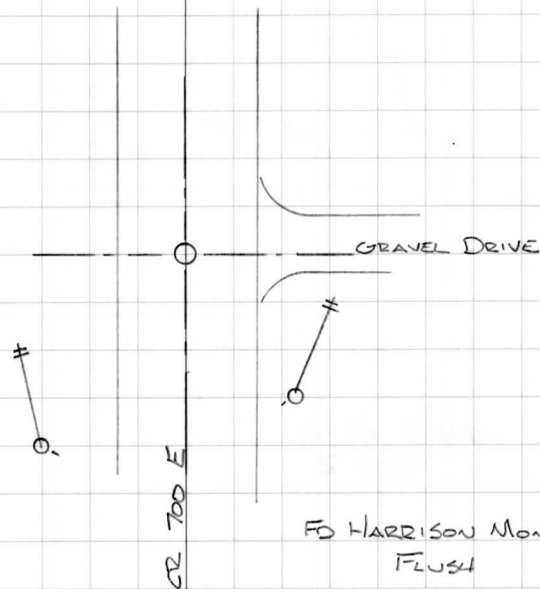

DESCRIPTION


SET 1/2" REBAR W/CAP 6' FROM E/P
 SET 1/2" REBAR W/CAP
 MAG NAIL IN TEL POLE FCP

BEARING DISTANCE

NW 28.52'
 NE 21.39'
 S 14.30'

TURKEY CREEK

8

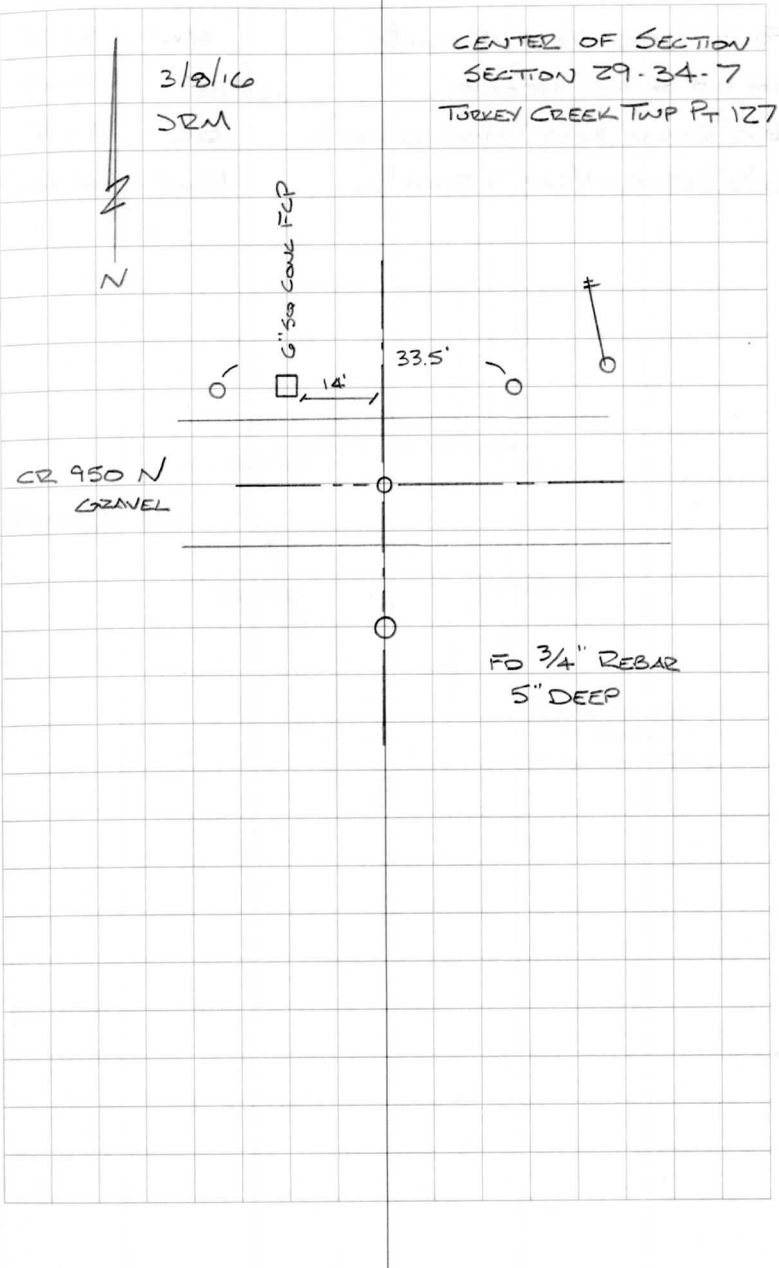


DESCRIPTION

BEARING DISTANCE

FO 1/2" REBAR W/CAP 8' FROM B/C	NW	34.58'
TOP NUT OF FIRE HYDRANT	E	17.45'
FO 1/2" REBAR (BENT & MISSING CAP)	SE	49.4'
FO 1/2" REBAR W/CAP 9' FROM B/C	SW	61.60'

WAYNE


9

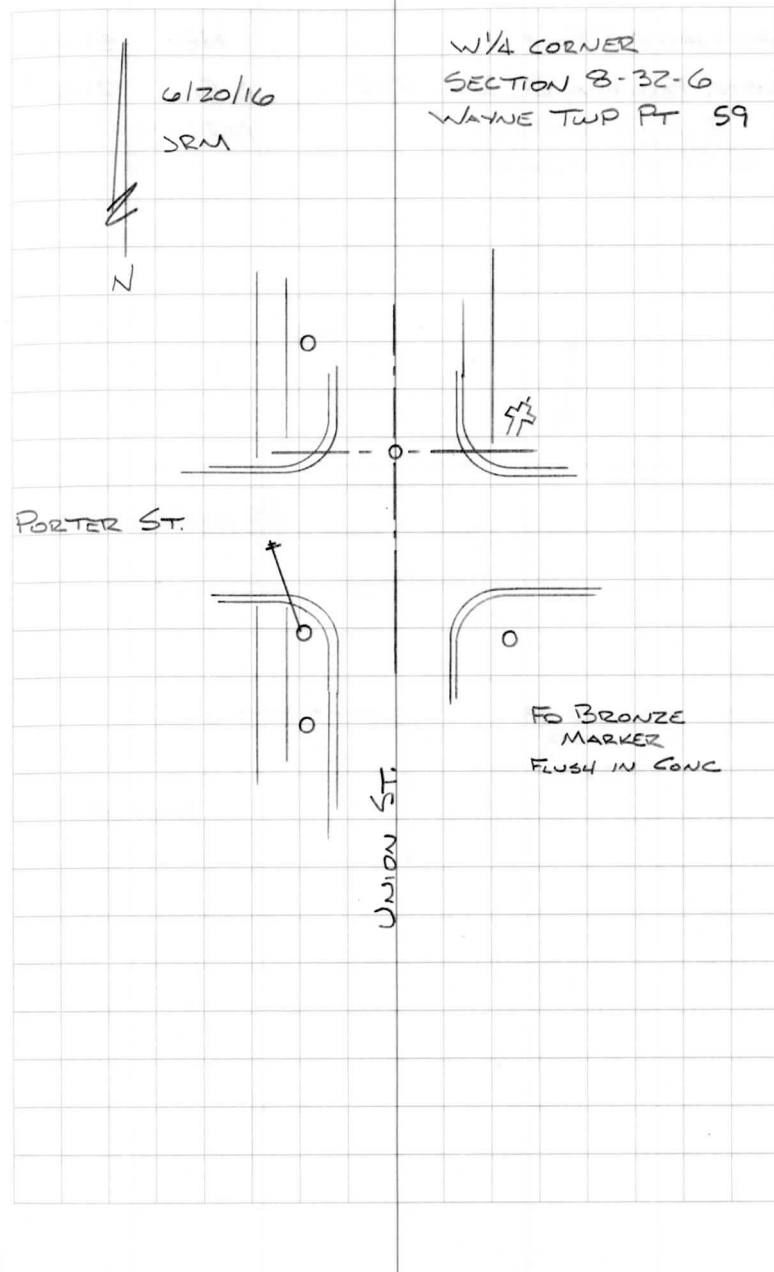


DESCRIPTION	BEARING	DISTANCE
MAG NAIL IN P. POLE	NE	51.49'
NEAREST FACE OF A RR RAIL FCP	S	21.45'

FRANKLIN

10



N 1/4 CORNER
SECTION 5-31-5
FRANKLIN TWP PT 10

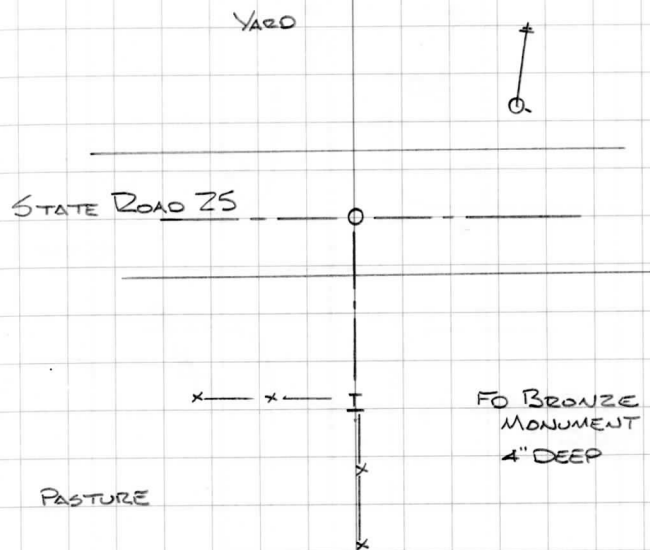


DESCRIPTION

BEARING DISTANCE

NEAREST EDGE OF A RR RAIL FCP	NW	42.25'
NAIL IN B. CAP IN P. POLE	NE	39.24'
NAIL IN B. CAP IN P. POLE	SW	72.25'

SEWARD

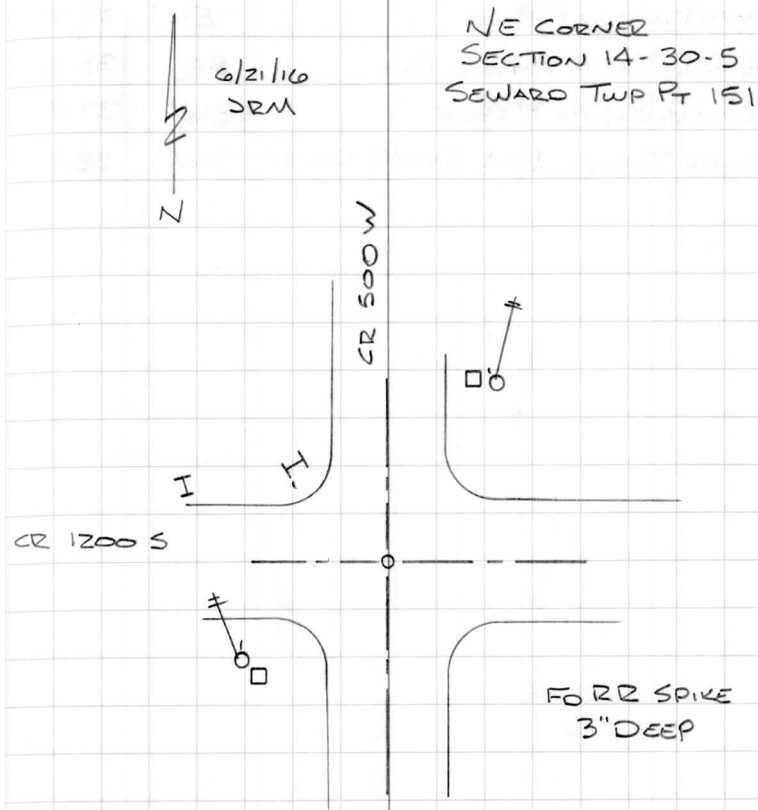

DESCRIPTION	BEARING	DISTANCE
NAIL IN B. CAP IN P. POLE	E	24.27'
NAIL IN B. CAP IN ANCHOR POLE	SE	35.85'
NAIL IN B. CAP IN P. POLE	SW	37.07'
4 BRONZE TABLET BM IDNR KOS III	SW	38.90'

SEWARD



6/21/16

JRM

E 1/4 CORNER
SECTION 14-30-S
SEWARD TWP RT 156

DRIVEWAY

CR 500 W

FO RR SPIKE
2" DEEP

DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN P. POLE

WNW 60.04'

NAIL IN B. CAP IN P. POLE


NE 51.35'

FO PK NAIL IN WASHER IN SQ WOOD FCP

ENE 37.95'

SEWARD

13

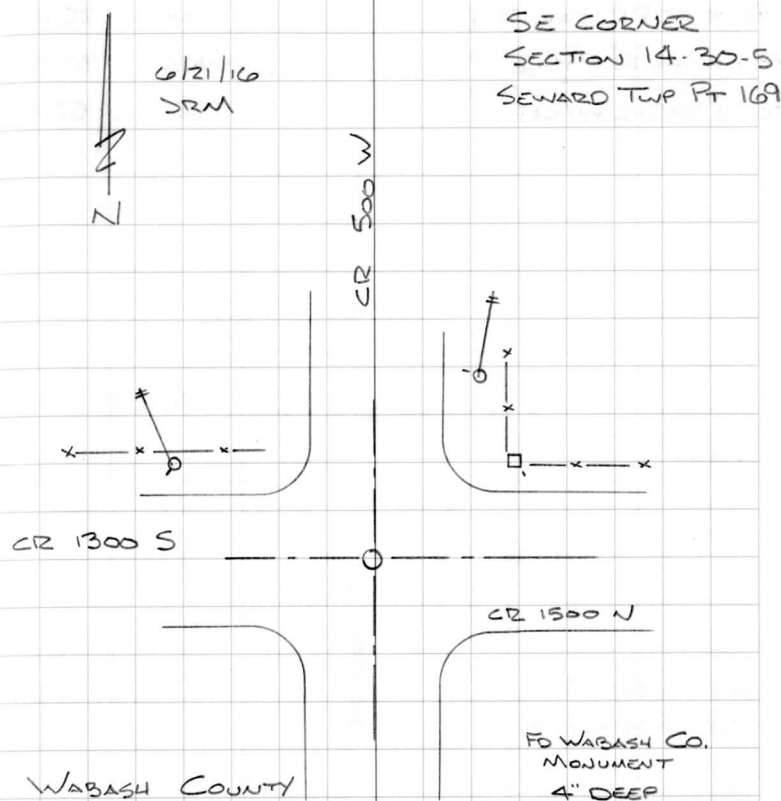


RR SPIKE SET BY DARRELL SMITH RLS 50111 11/1/1979
 WABASH CO FO SPIKE, DUG FOR STONE (NONE FO)
 6/15/1992, SET W.C.S.M. THEIR FIELD BOOK 3 Pg 23

DESCRIPTION	BEARING	DISTANCE
FACE OF RR RAIL FCP	N	22.0'
FO PK NAIL IN P. POLE	NE.	32.73'
FO 1/2" REBAR W/CAP	SE	52.0'

SEWARD


14

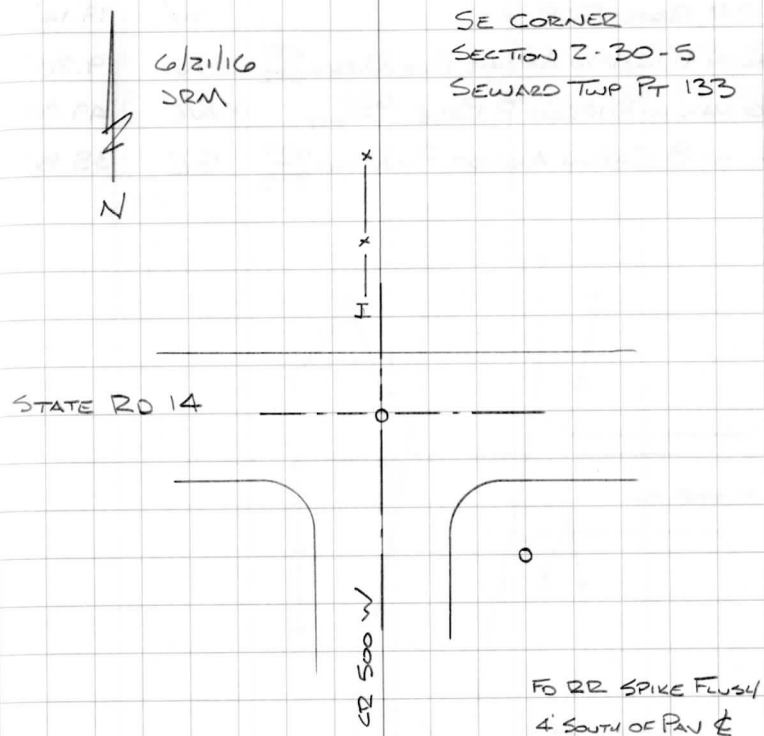

MEK 11/1999


DESCRIPTION	BEARING	DISTANCE
4 RR RAIL FCP	W	19.14'
NAIL IN B. CAP IN ANCHOR POLE NIPSCO $\frac{637}{372}$	N	9.20'
MAG NAIL IN NIPSCO P. POLE $\frac{637}{371}$	NE	49.37'
NAIL IN B. CAP IN ANCHOR P. NIPSCO $\frac{637}{373}$	SE	38.86'

PRAIRIE



6/22/16
JRM

N 1/4 CORNER
SECTION 1-33-5
PRAIRIE TWP PT 12

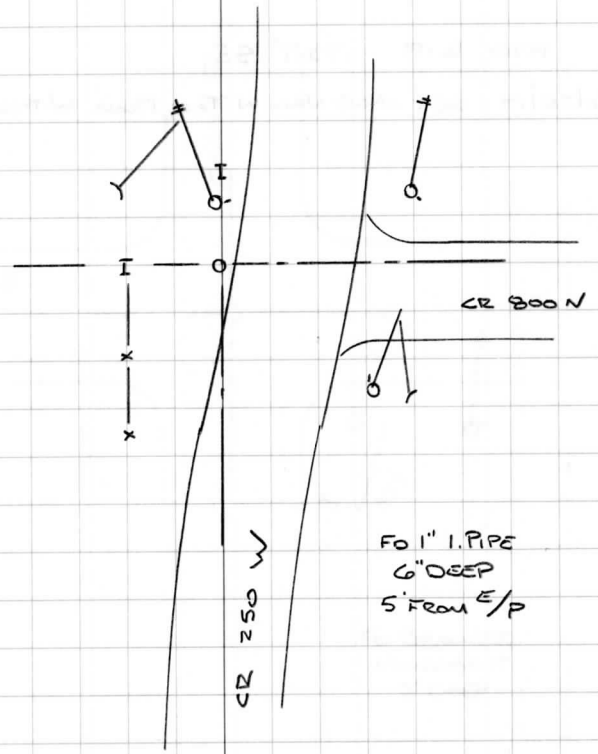

FO 1" I. PIPE
6" DEEP
5' FROM E/P

DESCRIPTION	BEARING	DISTANCE
SET MAG NAIL IN POWER POLE	ESE	86.16'
SET 1/2" REBAR W/CAP 10' FROM E/P	SE	54.72'
4 RR RAIL FCP	SSE	73.74'
SET NAIL IN B. CAP IN POWER POLE	WSW	100.02'


1970 RIP 73.7' SE

6/20/17 - SET MAG NAIL IN TAG FROM WITNESSES

CLAY

6/23/16
JRM

NE CORNER
SECTION 22-31-6
CLAY TWP PT 87

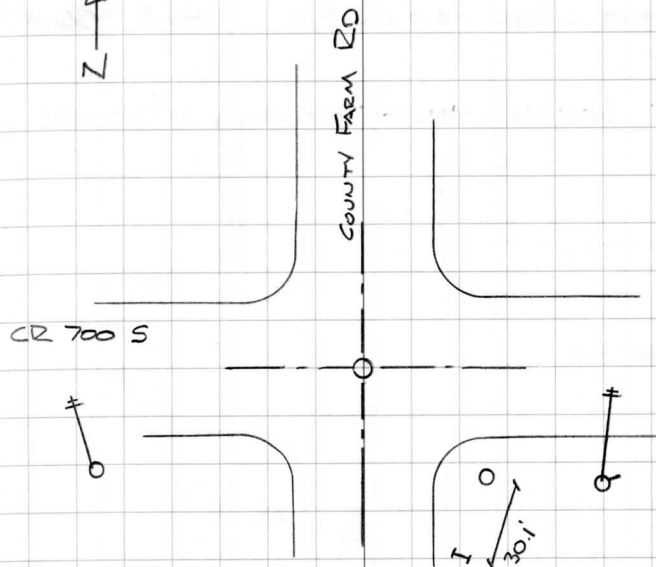

FO BRONZE
MONUMENT
2" DEEP

SURVEY RECORD BOOK 2 (COPY) Pg 348 CALLS FOR STONE
MAY 11, 1869


DESCRIPTION

BEARING DISTANCE

¢ OF A RR RAIL FCP	W	20.49'
NAIL IN B. CAP IN POWER POLE	NW	56.35'
¢ OF A RR RAIL FCP	E	20.45'
NAIL IN B. CAP IN TEL POLE	SE	28.43'

CLAY

18

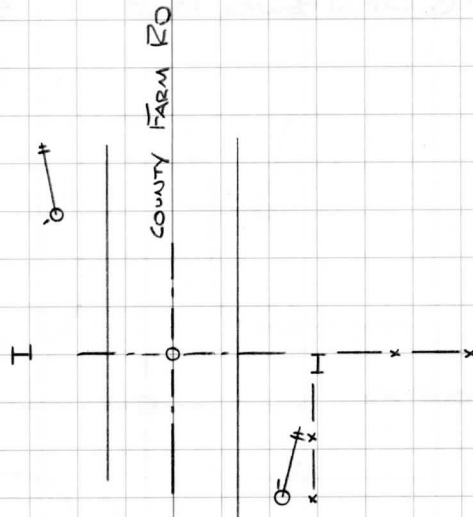6/23/16
JRME 1/4 CORNER
SECTION 27-31-6
CLAY TWP PT 122FO 3/4" HEX HEAD BOLT
7" DEEPFO PK NAIL 3" DEEP
0.24'S, 0.15' WSURVEY RECORD BOOK 2 (COPY) P 180 CALLS FOR STONE
FEBRUARY 18, 1860

DESCRIPTION

NAIL IN B. CAP IN POWER POLE

BEARING DISTANCE

WNW 57.21'

NAIL IN B. CAP IN ANCHOR POLE



NNE 64.38'

NAIL IN B. CAP IN POWER POLE

SE 53.28'

CLAY

19

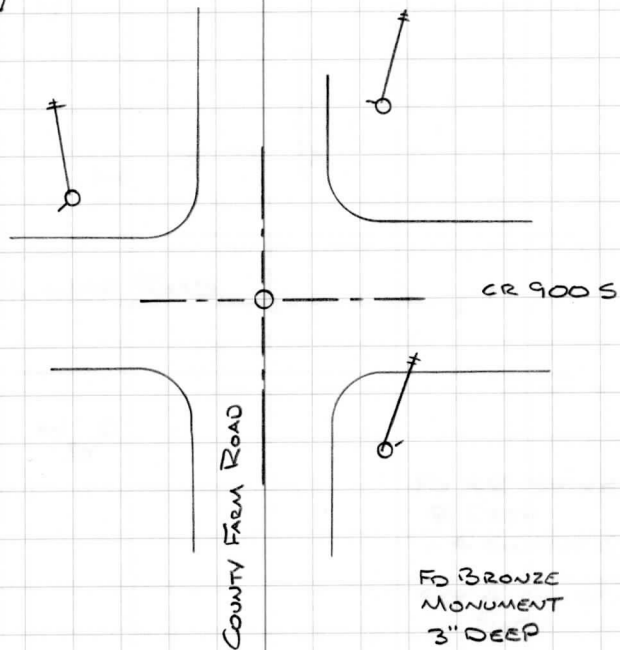6/23/16
JRMSE CORNER
SECTION 27-31-6
CLAY TWP PT 139


DESCRIPTION

BEARING DISTANCE

DESCRIPTION	BEARING	DISTANCE
SET 1/2" REBAR W/CAP 11.8' FROM E/P	NW	23.98'
NEAREST CORNER OF A 2 1/2" x 6" I-BEAM POST	N	23.40'
SET 1/2" REBAR W/CAP 9.2' FROM E/P	SW	25.54'


WAYNE

20

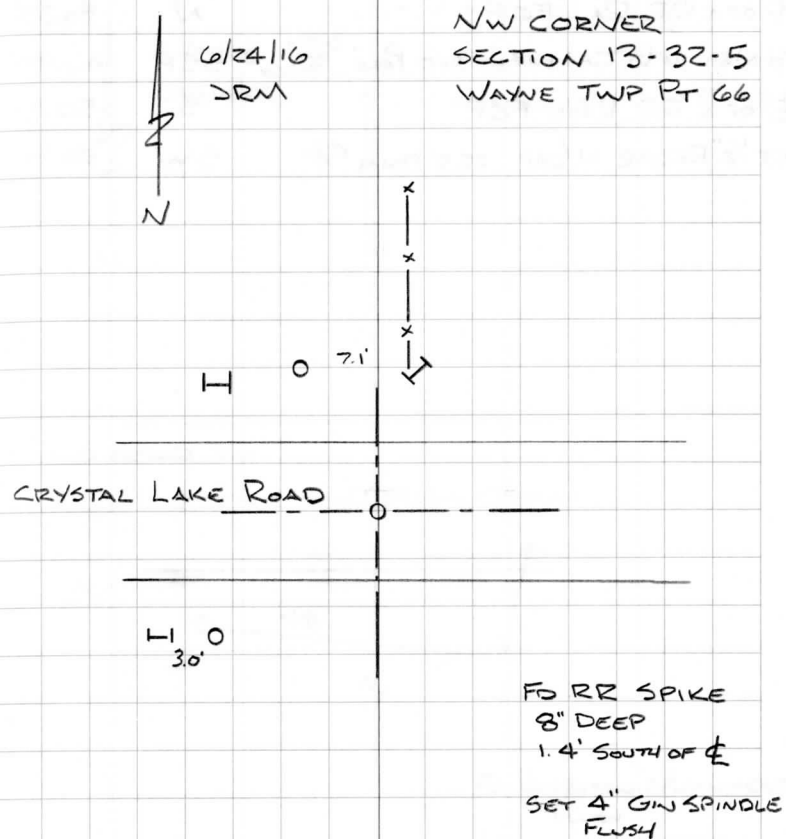

DESCRIPTION	BEARING	DISTANCE
℄ OF A RR RAIL FCP	N	50.38'
FO NAIL IN B. CAP IN NIPSCO POLE $\frac{626}{706}$	SSE	46.90'
℄ OF A RR RAIL FCP	S	50.31'
SET 1/2" REDAR W/CAP 25.5' FROM E/P	SW	50.30'

WASHINGTON

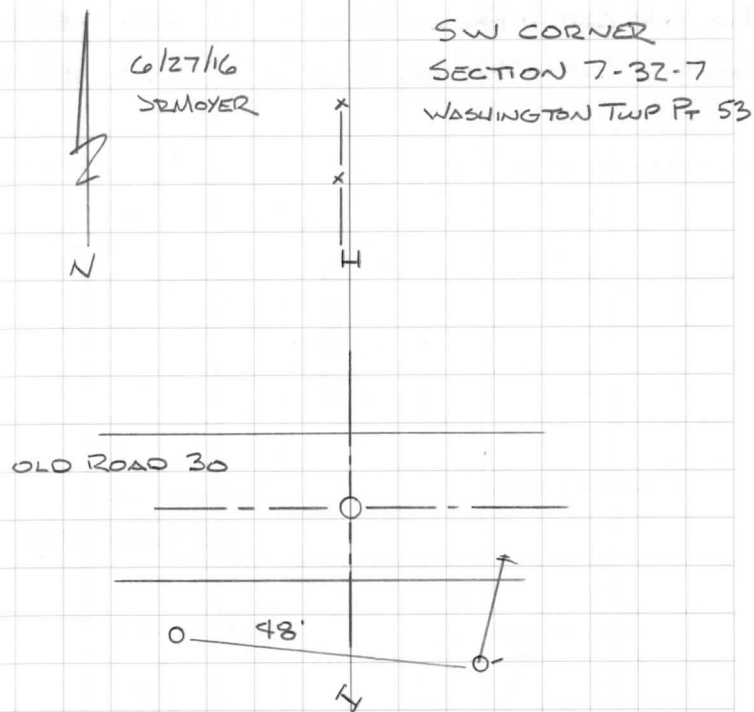

FO HARRISON MONUMENT
FLUSH
1/4" MAG NAILS AT 1.0'

DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN POWER POLE
NAIL IN B. CAP IN ANCHOR POLE

SE 54.24'
SW 54.99'

WASHINGTON

22



6/27/16

SRM

S $\frac{1}{4}$ CORNER
SECTION 7-32-7
WASHINGTON TWP PT 54

OLD ROAD 30

CR 450 E



FO HARRISON MONUMENT
TOP MISSING

$\frac{1}{4}$ " MAG NAILS AT 1.0'

DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN POWER POLE

ENE 72.41'

NAIL IN B. CAP IN POWER POLE

SE 65.60'

4 RR RAIL FCP


S 50.17'

4 CONC BRIDGE

W 110.5'

WASHINGTON

23




6/27/16

DR MOYER

SE CORNER

SECTION 7-32-7

WASHINGTON TWP PT 55

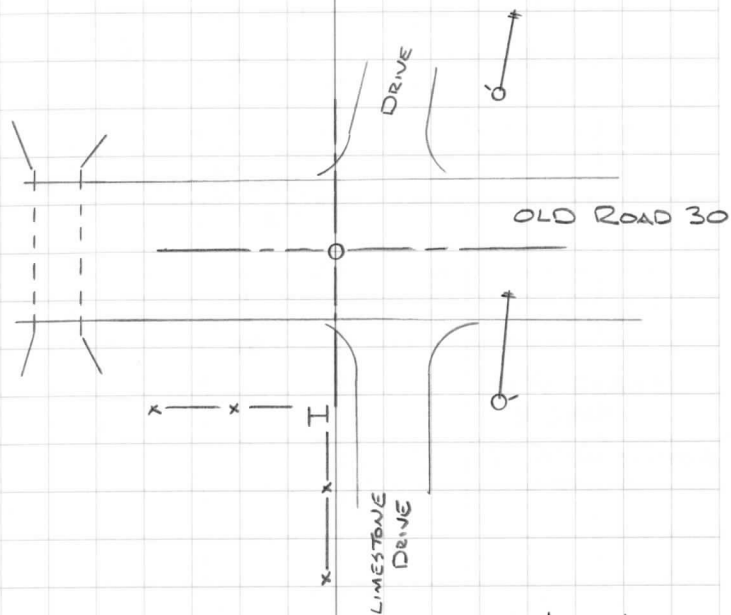

FO MAG NAIL
IN "WALKER" WASHER
FLUSH

DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN UNITED TEL POLE

WNW 78.92'

E OF A 5" DIA STEEL FCP

N 20.33'

NAIL IN B. CAP IN TEL POLE

ENE 72.50'


NAIL IN B. CAP IN POWER POLE

WSW 95.95'


10/26/17 SRM SET MAG NAIL W/CO TAG FROM WITNESSES

WAYNE

24



S 1/4 CORNER
SECTION 12-32-5
WAYNE TWP PT 67

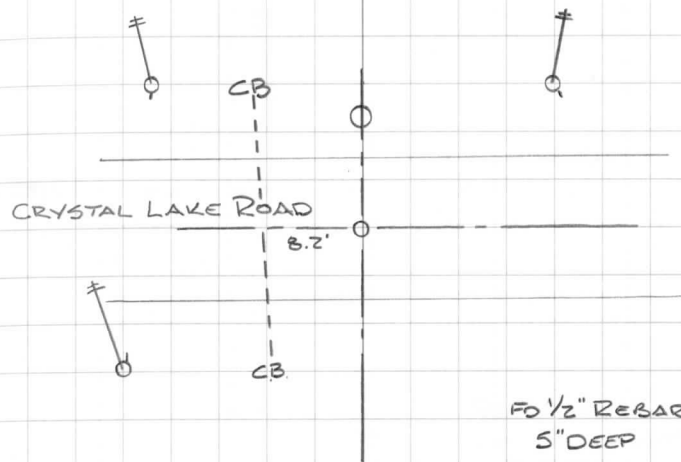

FO 1/2" REBAR
5" DEEP

SET 4" GIN SPINDLE
OVER TOP

DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN POWER POLE

NNW 18.11'

4 RR RAIL FCP

S 18.82'


NAIL IN B. CAP IN POWER POLE

WSW 62.25'

10/26/17 2RM SET MAG NAIL w/CO TAGS FROM WITNESSES

WAYNE

25

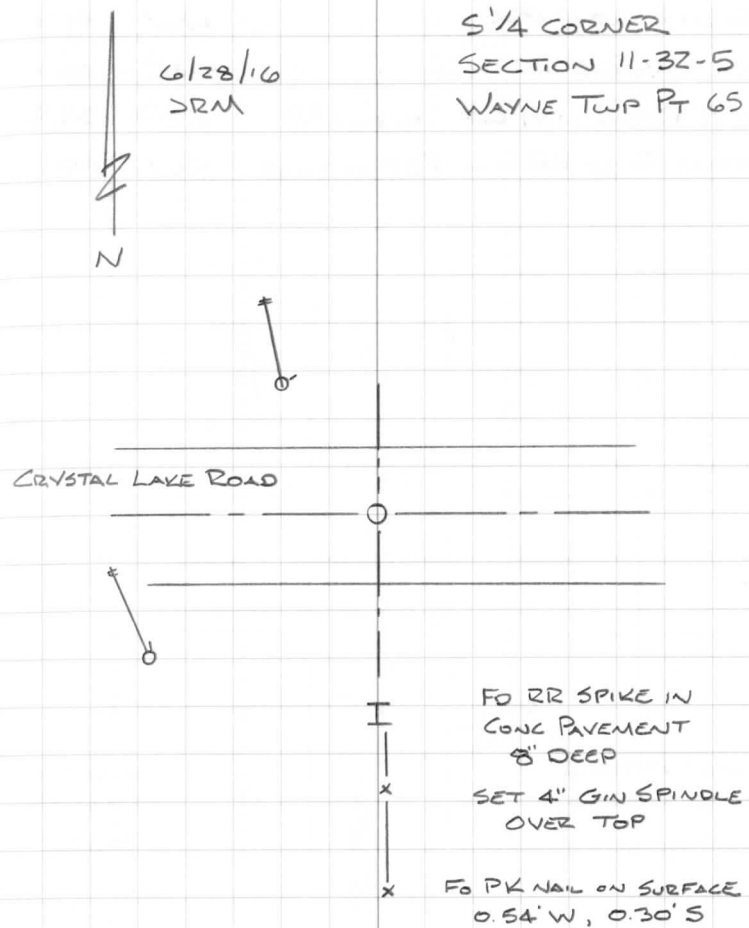


DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN P. POLE	NW	51.90'
NAIL IN B. CAP IN P. POLE	ENE	64.62'
SET 1/2" REBAR WITH CAP 16' FROM E/P	SE	39.94'
NEAREST EDGE RR RAIL FCP AT BASE	SW	40.85'

LAKE

26

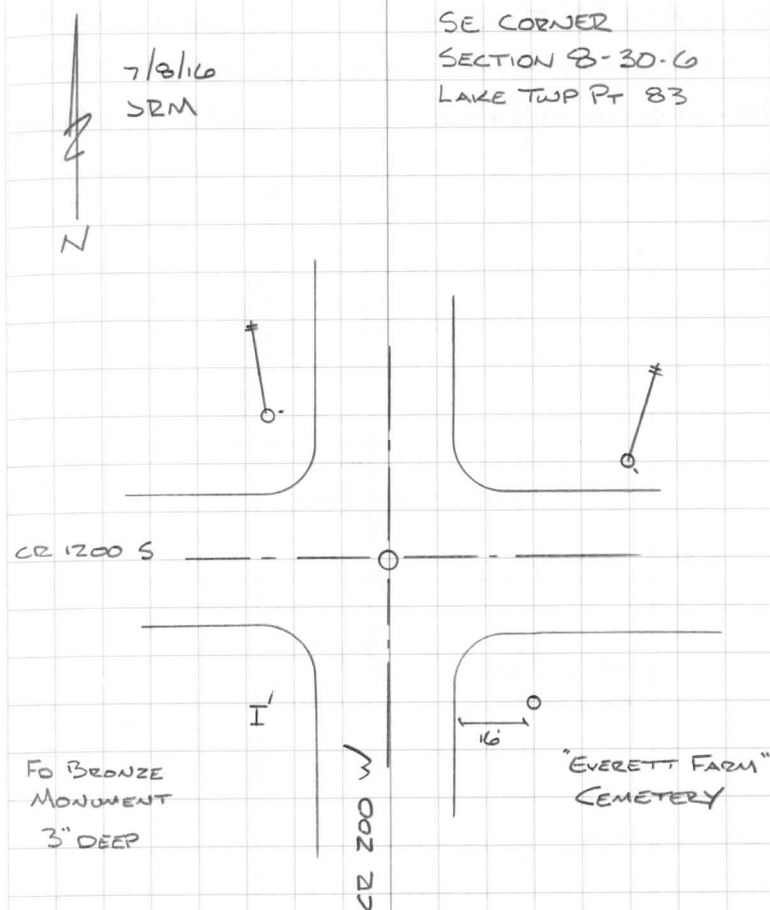

SURVEY RECORD BOOK 2 (COPY) Pg 195 CALLS FOR STONE
OCTOBER 31, 1860

DESCRIPTION

BEARING DISTANCE

FACE OF A RR RAIL FCP	N	21.15'
SET 1/2" REBAR W/CAP 10.5' FROM E/P	SSW	22.61'
NAIL IN B. CAP IN P. POLE	WSW	69.34'


LAKE

27



7/8 1/6
DRM

S 1/4 CORNER
SECTION 8-30-6
LAKE TWP PT 82

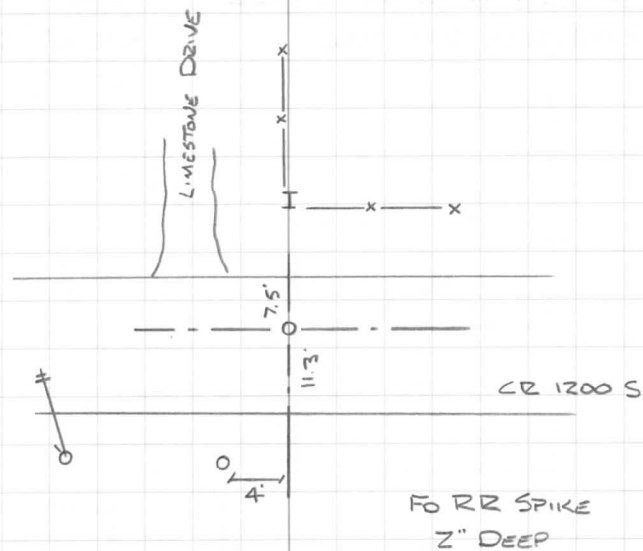


DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN REMC P. POLE	NW	46.90'
NAIL IN B. CAP IN REMC P. POLE	NNW	59.35'
⊥ RR RAIL FCP	NE	38.25'
NAIL IN B. CAP IN REMC P. POLE	SW	45.51'
USC & GS BM 2171 1946	WSW	34.73'

PRAIRIE

28

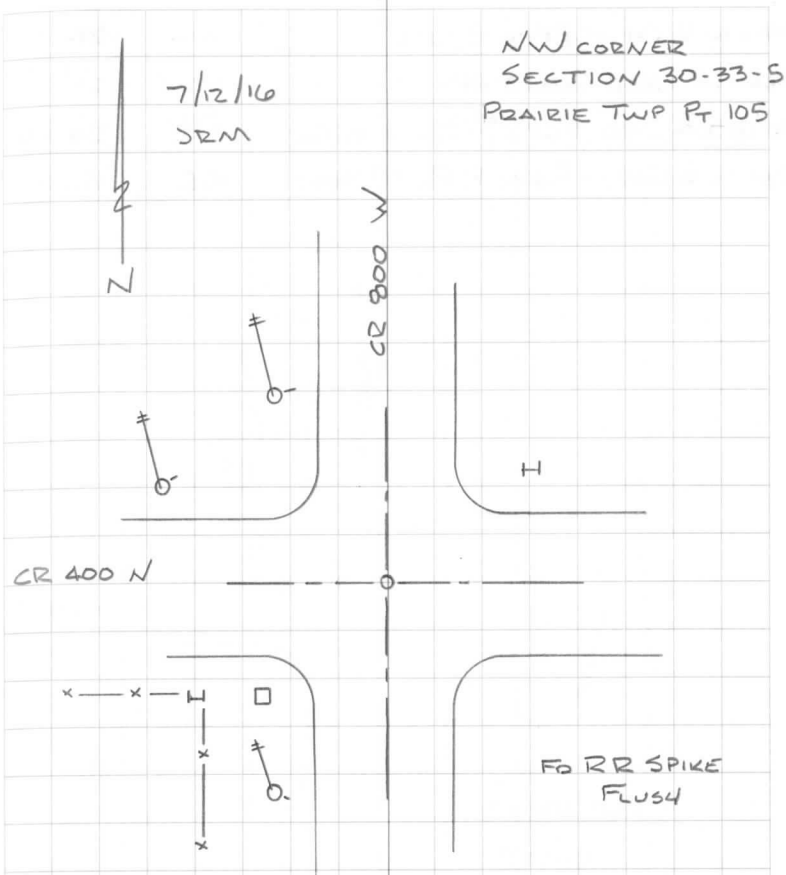

KEMPER SURVEY 10/22/03
 SURVEY RECORD BOOK 3 P 179 CALLS FOR STONE 1922
 " " " 3 P 216 CALLS FOR STONE 12" DEEP
 AZS


DESCRIPTION

BEARING DISTANCE

DESCRIPTION	BEARING	DISTANCE
NAIL IN B. CAP IN REMC P. POLE	NW	28.14'
NEAREST EDGE CONG FCP	NW	25.7'
FO 2" DIA STEEL FCP CUT FLUSH TO PAV	NE	24.45'
NAIL IN B. CAP IN REMC P POLE #3031	SE	51.00'

SEWARD

29

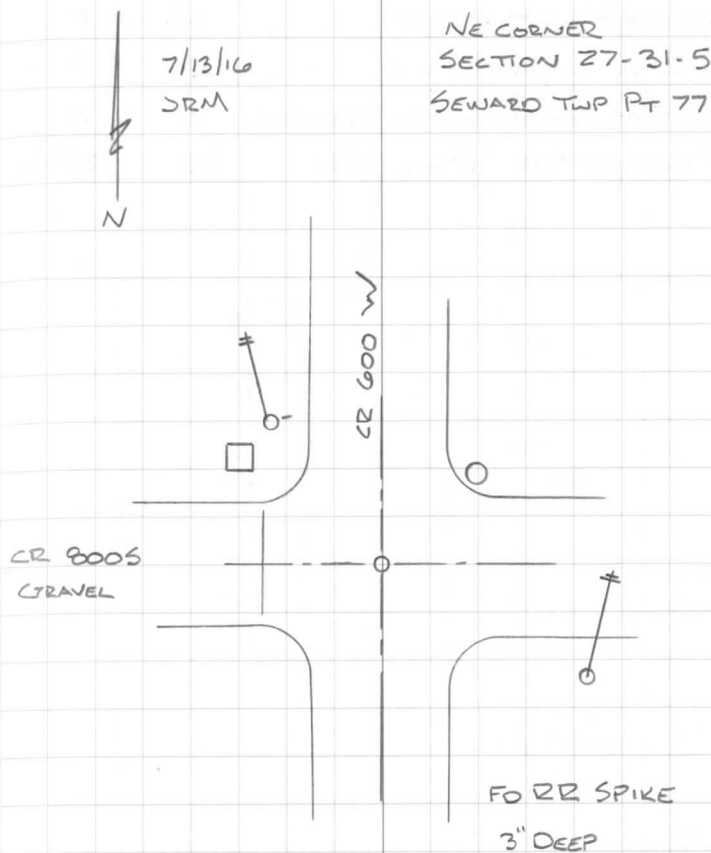

7/27/67 C BOWER SURVEY NOTES: WITNESSES TO
BR MARKER AT NE CORNER SEC 27, CONG POST NW 25.7'
2" I.P. COR POST NE 24.5'

SURVEY RECORD BOOK 2 (COPY) P 138 CALLS FOR STONE
JUNE 8, 1858


DESCRIPTION

BEARING DISTANCE

EAST FACE OF A 8" SQ CONC FCP	W	19.65'
NAIL IN B. CAP IN POWER POLE	NW	18.73'
2" IRON PIPE FCP AT BASE OF 24" DIA OAK	E	19.15'
SET 1/2" REBAR W/CAP 11' FROM E/P	SE	25.55'

SEWARD

30

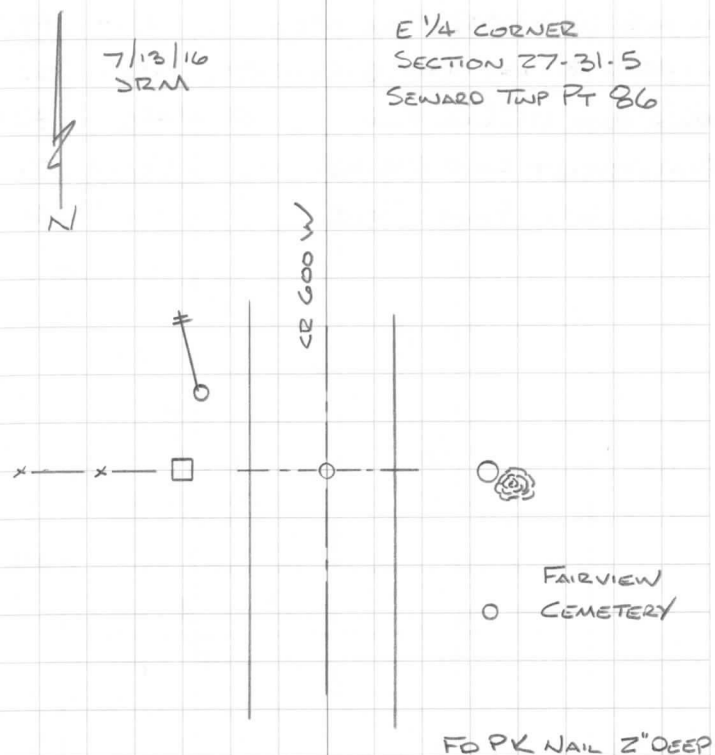B. RETZ SURVEY - BOOK 59 P₃ 41 MAY 2, 1981KEMPER SURVEY - BOOK 118 P₃ 24 JULY 30, 1993C BOWER SURVEY - BOOK 72 P₃ 8 MARCH 19, 1984

NO STONE CALLED FOR


DESCRIPTION

BEARING DISTANCE

NAIL IN B CAP IN REMC P POLE 0730	NW	58.55'
& CHISELED TRIANGLE DNR BM KKK 109	NE	53.31'
NEAREST EDGE RR RAIL FCP	SE	32.16'
& BRASS TABLET DNR BM KOS 103	SSW	21.46'
NAIL IN B CAP IN POWER POLE	SW	64.95'

SEWARD

31

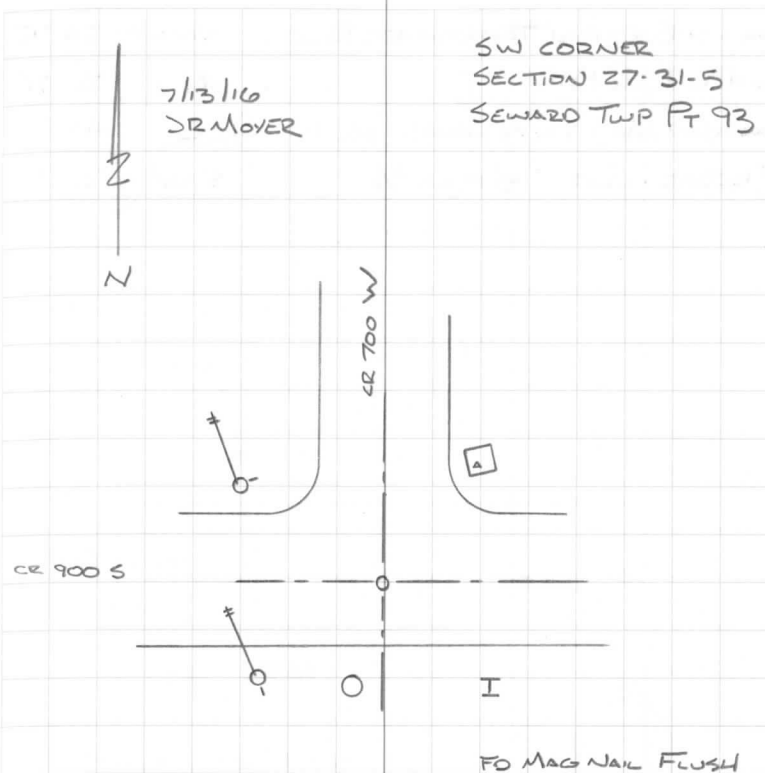

STONE CALLED FOR SURVEY RECORD BOOK 3 Pg 209 1924

DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN TRANSFORMER POLE	NNW	24.92'
4 RR RAIL FCP	N	20.3'
HARRISON MON (N 1/4 CORNER SEC 1-32-6)	E	46.21'
1/2" REBAR N/CAP 8' FROM E/P	SW	26.12'

FIELD BOOK 1 Pg 14 - S 1/4 CORNER SECTION 36-33-6

N 1/4 CORNER SECTION 1-32-6 SEE FIELD BOOK 3 Pg 14

PLAIN

32



7/14/16

JRM

S 1/4 CORNER
SECTION 36-33-6
PLAIN TWP PT 168

CR 200 N
GRAVEL

FO STONE WITH *+ CUT
12" DEEP

SET HARRISON MONUMENT
OVER TOP


SURVEY RECORD BOOK 4 Pg 192
A 0.69 1/2 CHN JOG - 45.87'

1909 CALLS FOR




DESCRIPTION	BEARING	DISTANCE
¢ OF A RR RAIL FCP	N	49.90'
SET 1/2" REBAR W/CAP 12.5' S OF FENCE	NE	44.96'
NAIL IN B CAP IN POWER POLE	SW	75.06'

WASHINGTON

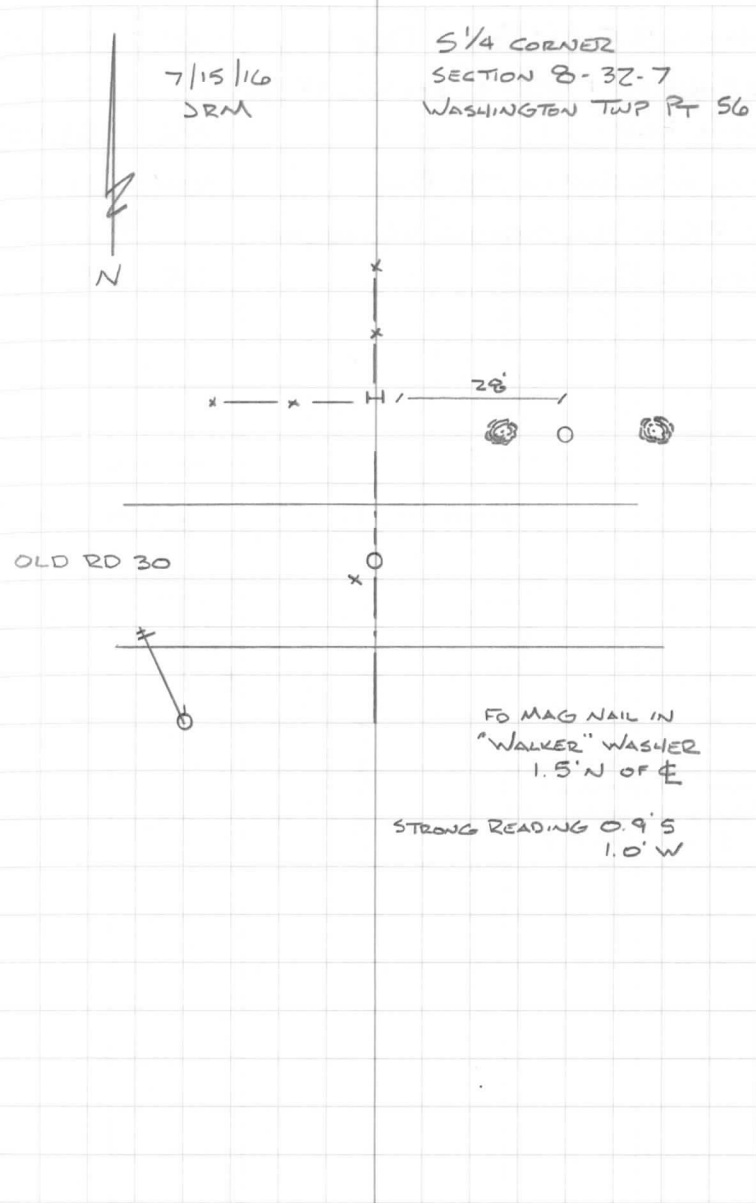

DESCRIPTION	BEARING	DISTANCE
NAIL IN B. CAP IN POWER POLE	NNE	60.34'
FO CHISELED "+" IN TOP OF LEAVING 14" SQ CONC FCP	NE	53.52'
NAIL IN B. CAP IN TEL POLE	SW	60.85'
FO PK IN "K.C. SURVEYOR" WASHER IN POWER POLE	SE	55.60'

WASHINGTON

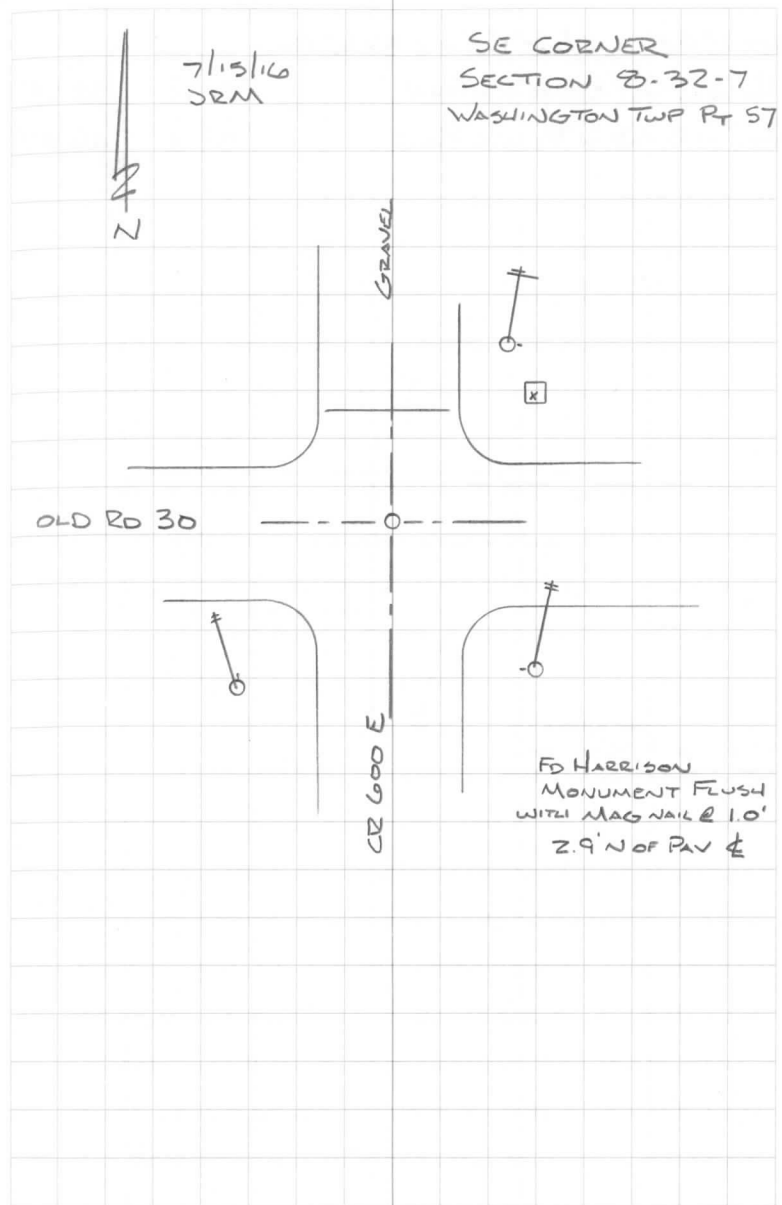

DESCRIPTION

BEARING DISTANCE

SET 1/2" REBAR W/CAP BESIDE 8"x36" CONC

HOWALL FOR DRIVE CULVERT


NNE 32.25'

NAIL IN B CAP IN POWER POLE

SSE 46.47'

WASHINGTON


35

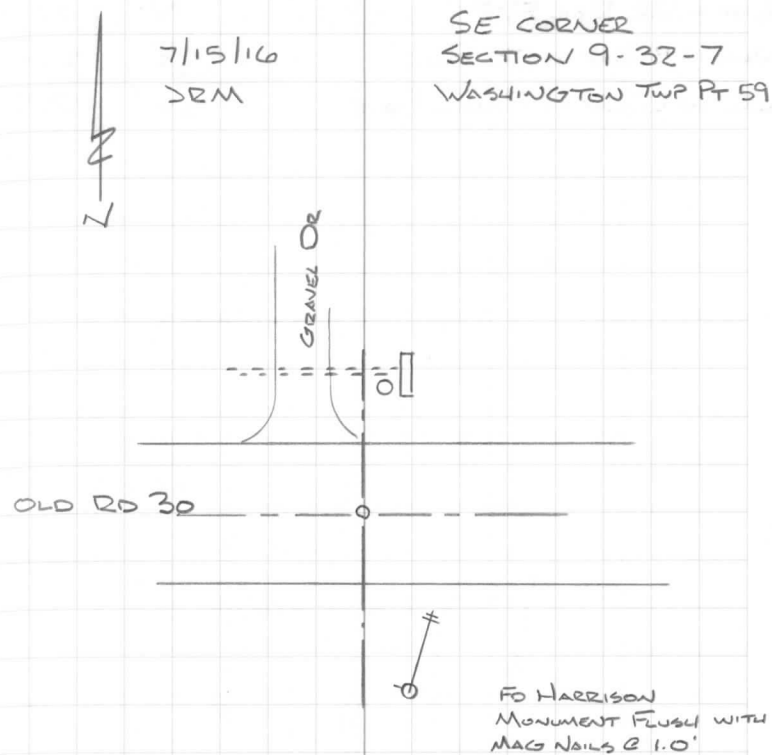

DESCRIPTION	BEARING	DISTANCE
¢ OF A RR RAIL FCP	N	50.16'
NAIL IN B. CAP IN TEL POLE	SE	53.45'
NAIL IN B. CAP IN POWER POLE	SW	59.75'

WASHINGTON

36

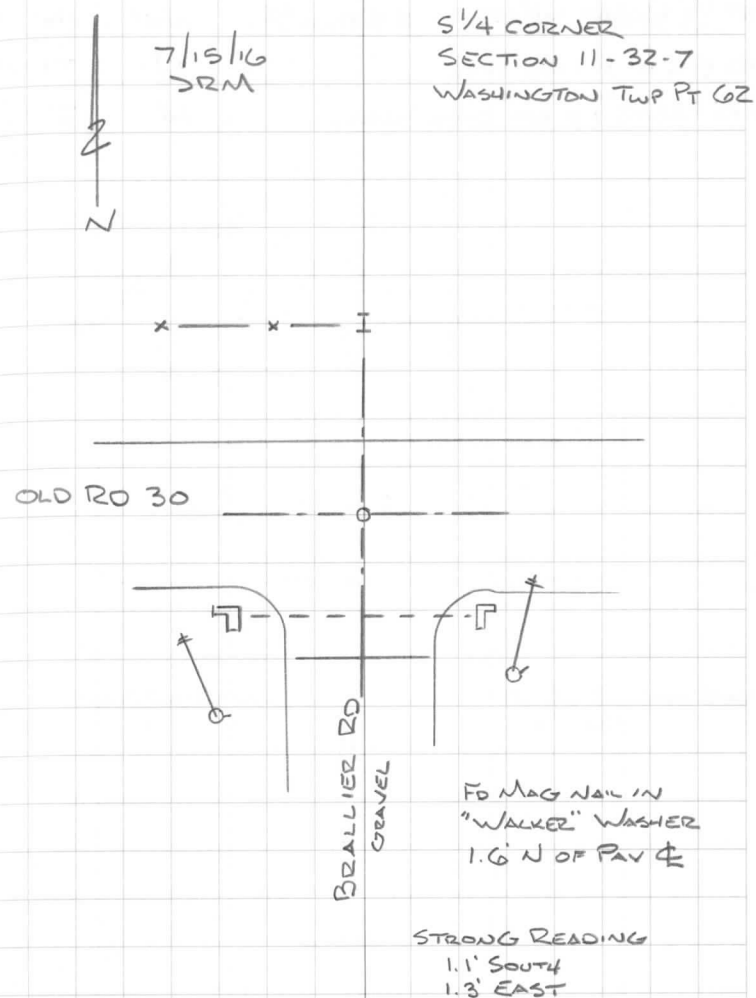


DESCRIPTION

BEARING DISTANCE

SET 1/2" REBAR W/CAP	5.5' FROM E/P	NW	40.73'
MAG NAIL IN POWER POLE		N	21.62'
FO 1/2" REBAR 1.0' OFF CONC WALK		N	29.9'

WAYNE

37

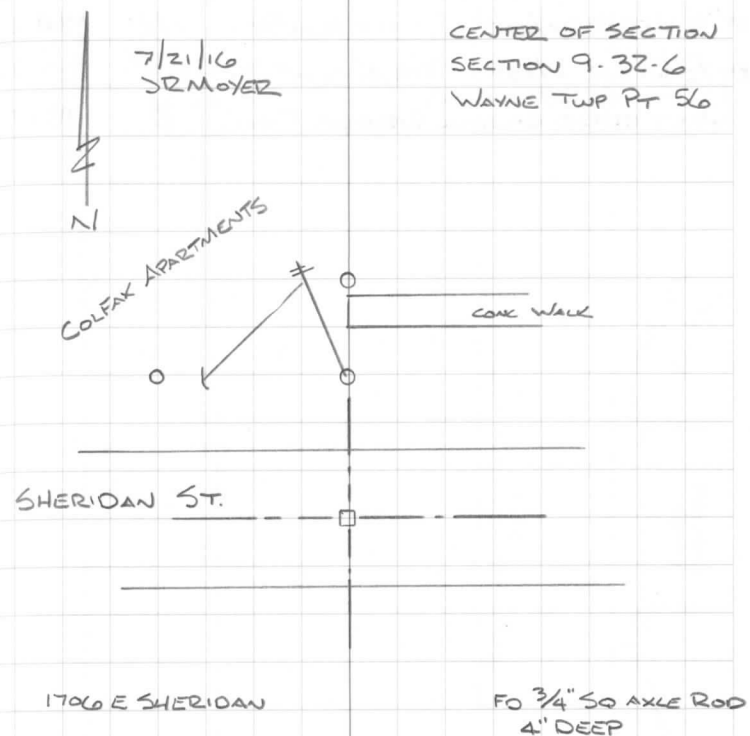


DESCRIPTION

BEARING DISTANCE

SET 1/2" REBAR W/CAP	9.9' FROM E/P	NE	34.27'
SET 1/2" REBAR W/CAP	9.8' FROM E/P	SE	32.71'
WEST EDGE OF CONC BRIDGE DECK		E	189.5'

WASHINGTON

38

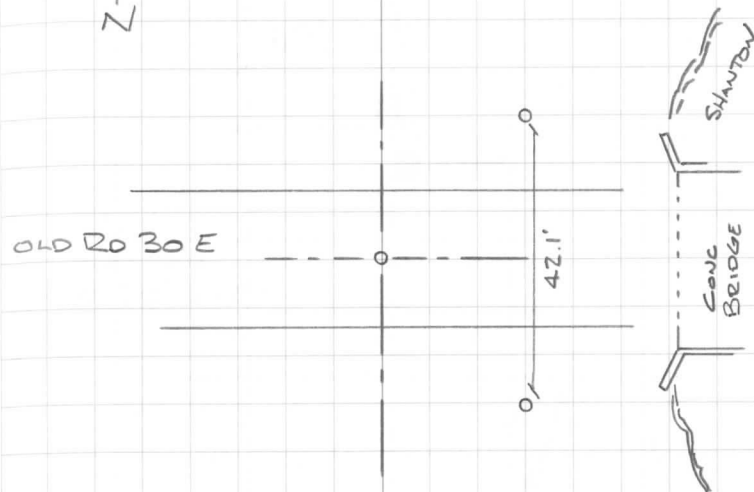7/22/16
JRMSW CORNER
SECTION 11-32-7
WASHINGTON TWP PT 61


DESCRIPTION

BEARING DISTANCE

⊥ RR RAIL FCP	N	50.07'
⊥ FO MAG NAIL IN WASHER IN POWER POLE	SE	53.80'
SET 1/2" REBAR W/CAP 16.3' FROM E/P	SW	46.46'

WASHINGTON

39

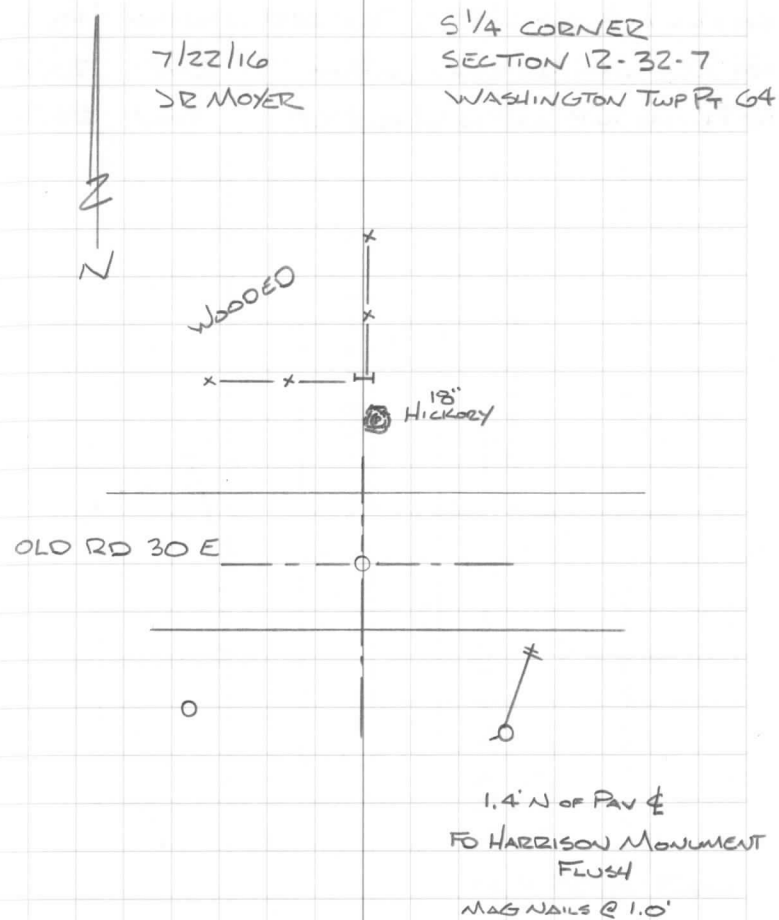

DESCRIPTION

BEARING DISTANCE

SET NAIL IN B. CAP IN REMC POLE 2449	WSW	18.30'
SET NAIL IN B. CAP IN FENCE POST	ENE	20.72'
FD PK NAIL IN B. CAP IN WOOD FCP	SW	28.35'

WASHINGTON

40




7/22/16

JRM

SE CORNER

SECTION 12-32-7


WASHINGTON TWP PT 65

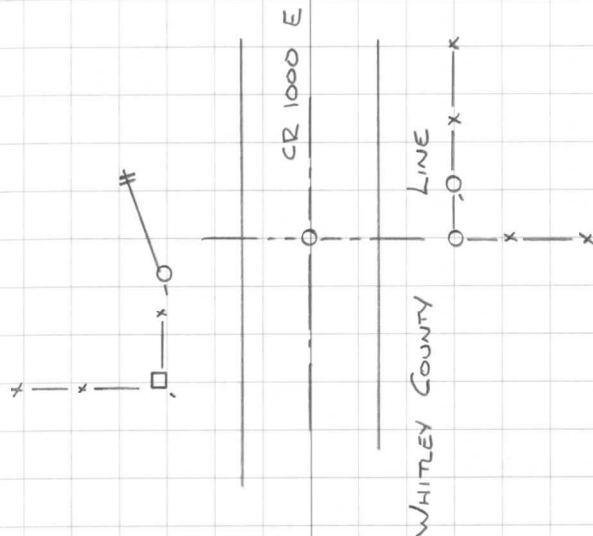

FO 1/2" REBAR FLUSH

DESCRIPTION	BEARING	DISTANCE
SE CORNER 6" x 10" STEEL BRIDGE BEAM POST	NW	41.35'
SW CORNER 6" x 12" BRIDGE BEAM FCP	NE	45.27'
NAIL IN B. CAP IN POWER POLE	SSW	20.45'

JEFFERSON

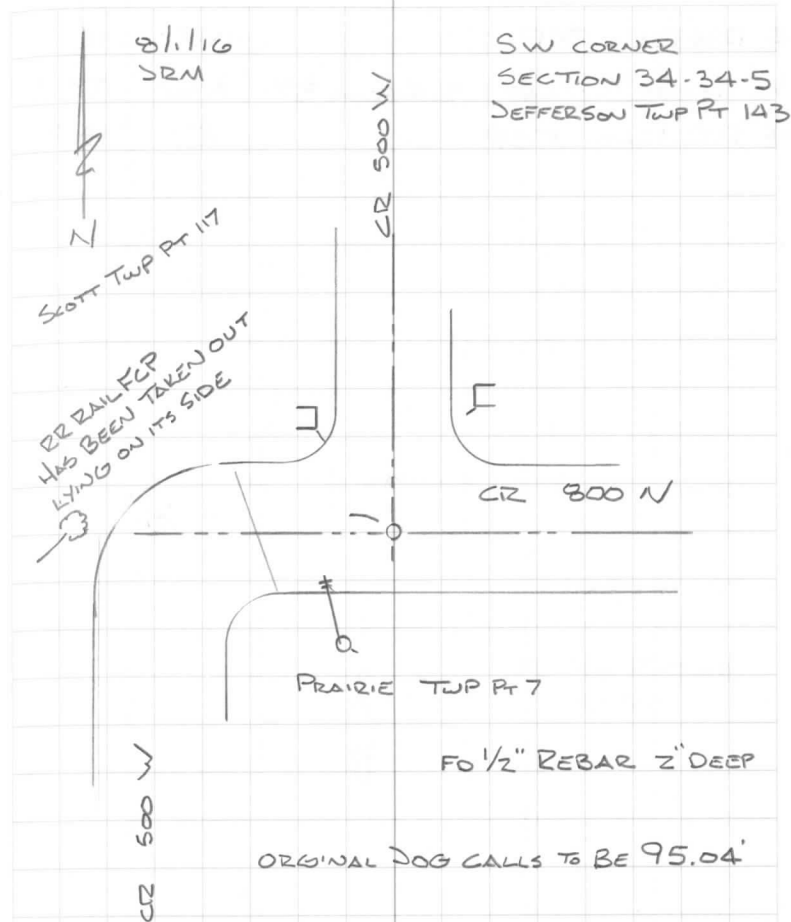

DESCRIPTION

BEARING DISTANCE

⊥ RR RAIL FCP	W	16.09'
• 1/2" REBAR W/CAP 3.4' FROM E/P	NW	25.83'
⊥ RR RAIL FCP	E	15.93'


PRAIRE

42



8/1/16
JRM

W 1/4 CORNER
SECTION 3-33-5
PRAIRIE TWP PT 20

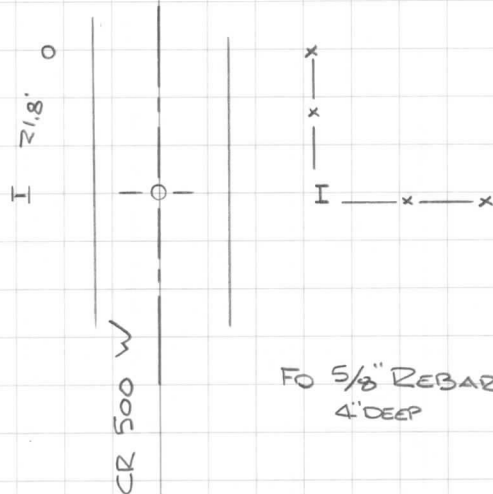


DESCRIPTION

BEARING DISTANCE

SW CORNER OF RR RAIL FCP AT BASE	ENE	71.79'
1/2" REBAR W/CAP 9.3' FROM E/P	SE	44.80'
NAIL IN B. CAP IN POWER POLE	S	19.10'
OLD TIE		
NW CORNER OF HOUSE	SW	76.3' ✓

HARRISON

43

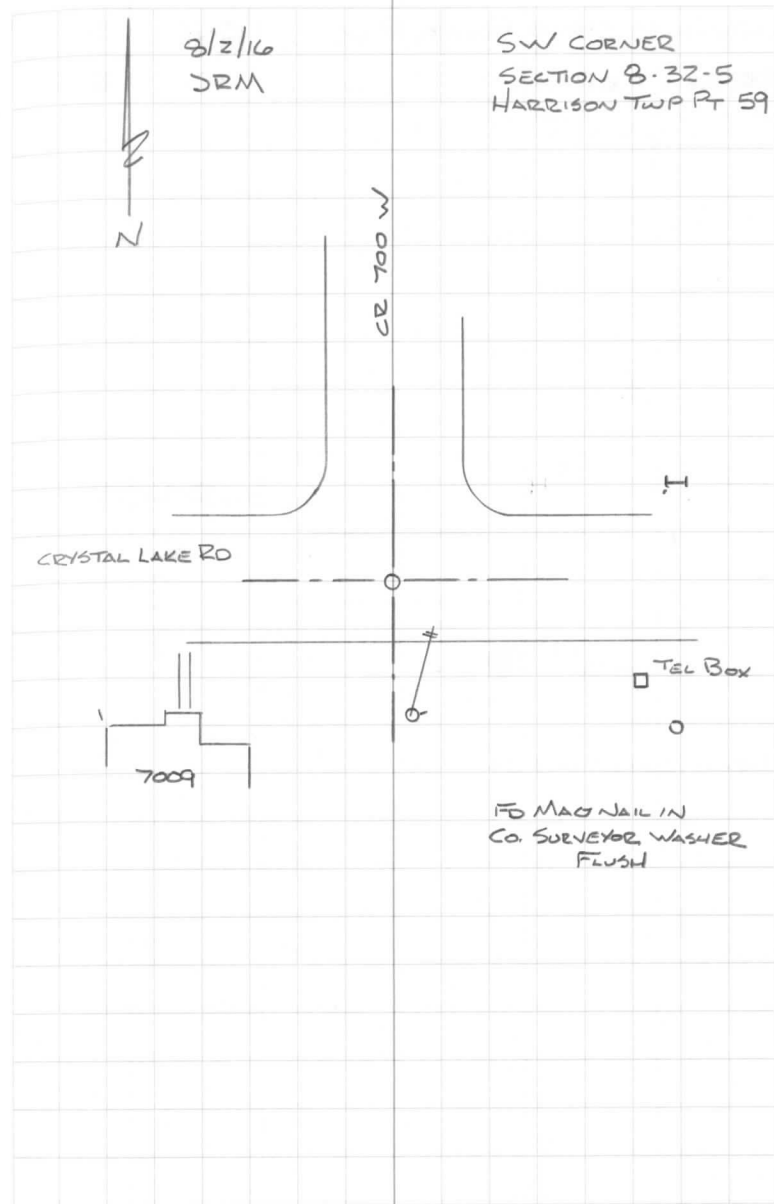

DESCRIPTION

SET NAIL IN B. CAP IN POWER POLE

⊥ RR RAIL FCP

BEARING DISTANCE

ENE

55.27'

S

21.22'

HARRISON

44

8/2/16
JRMSW CORNER
SECTION 11-32-4
HARRISON TWP PT 53

WELCH ROAD

44" DIA
WHITE OAK TREE

FOR RR SPIKE FLUSH


DESCRIPTION

BEARING DISTANCE

FO PK NAIL IN POWER POLE	W	19.26'
E RR RAIL FCP CUT OFF FLUSH WITH BASE	NE	27.08'
FO PK NAIL IN POWER POLE	ESE	54.08'
2/8/2002 RK & MK SET WITNESSES INCLUDING		
"+" CUT IN CONC FCP BASE	NE	25.78'

HARRISON

45

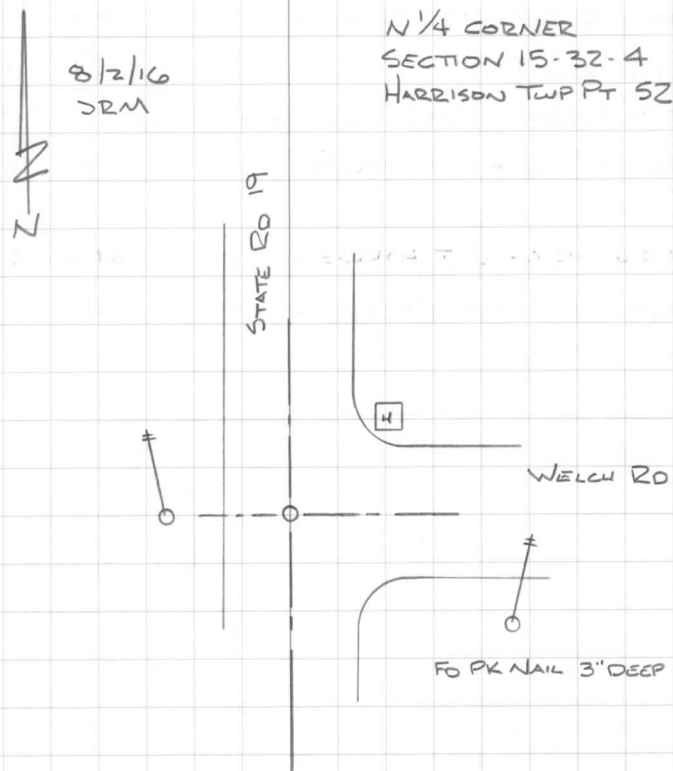

STONE SURVEY RECORD Book 4 Pg 126

STONE SURVEY RECORD Book 3 Pg 103 6/17/1920

TWO STONES REMOVED, ONE SET

DESCRIPTION	BEARING	DISTANCE
NAIL IN B. CAP IN POWER POLE	SW	29.97'
RR RAIL FCP	WSW	18.44'
SET 1/2" REBAR W/CAP 16.7' FROM RR RAIL	NW	18.42'
NAIL IN B. CAP IN POWER POLE	N	46.11'

8/19/16 DRM - SET HARRISON MONUMENT OVER STONE

9/19/16 DRM - SET 1/2" REBAR W/CAP NE 56.01'

SURVEY RECORD BOOK 4 Pg 206 - MARCH 4 1910

FO STONE FOR SE CORNER SECTION 12-32-4

38 LKNS NORTH (25.08')

SEE PAGE 63


HARRISON

46



8/3/16
DRM

SW CORNER
SECTION 7-32-5
HARRISON TWP PT 57

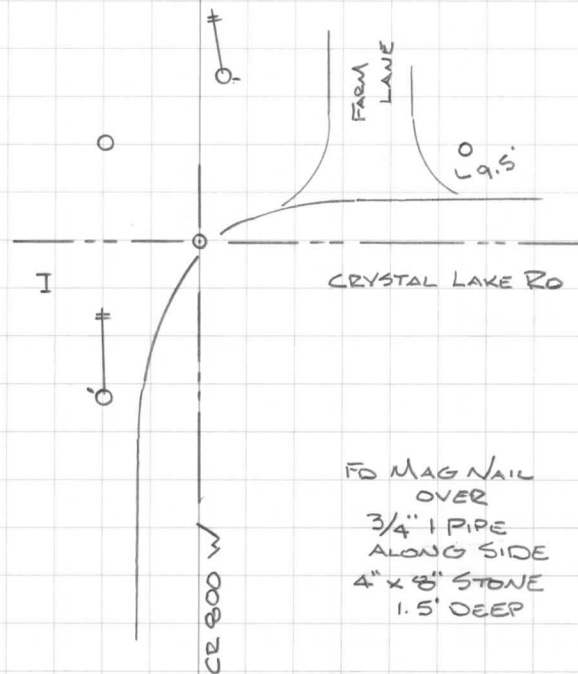

FO MAG NAIL
OVER
3/4" PIPE
ALONG SIDE
4" x 8" STONE
1.5' DEEP

STONE - SURVEY RECORD BOOK 3 Pg 186 6/13/1923
Ry I.P. 18' SW

STONE - SURVEY RECORD BOOK 3 Pg 40 1934
RIP 18' SW

SURVEY RECORD BOOK 2 (copy) Pg 284 - DECEMBER 18 1866
ORIGINAL FIELD NOTE BOOK Pg 352 - INTERSECTED 38 LKNS SOUTH


DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN POWER POLE	W	21.23'
± RR RAIL FCP	W	22.46'
NAIL IN B. CAP IN POWER POLE	NNE	42.41'
NAIL IN B. CAP IN POWER POLE	ENE	59.69'

PRAIRIE

47

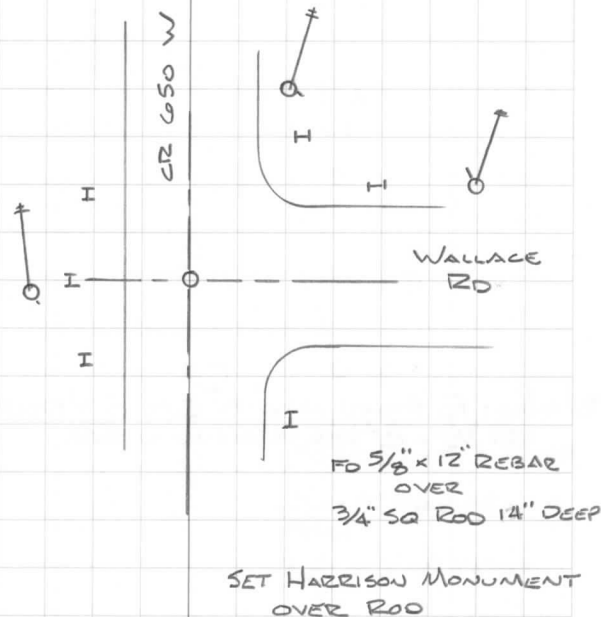8/4/16
JRMCENTER OF SECTION
29-33-5
PRAIRIE TWP PT 127

SEE SECTION CORNER FIELD BOOK 1 Pg 1 1989

DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN POWER POLE	NE	33.05'
1/2" REBAR W/CAP 1.8' FROM EDGE	SE	32.33'
1/2" REBAR W/CAP AT NW COR CONC BASE	S	13.86'
REMAINS OF FCP IN CONC	S	14.56'
1/2" x 18" REBAR REPLACING RR SPIKE	N	3.12'

8/20/16 - FD STONE WITH "X" CUT 0.7' DEEP
SET 1/2" x 12" REBAR ALONG N SIDE


TIPPECANOE

48



8/5/16
SRM

W 1/4 CORNER
SECTION 25-33-7
TIPPECANOE TWP PT 120

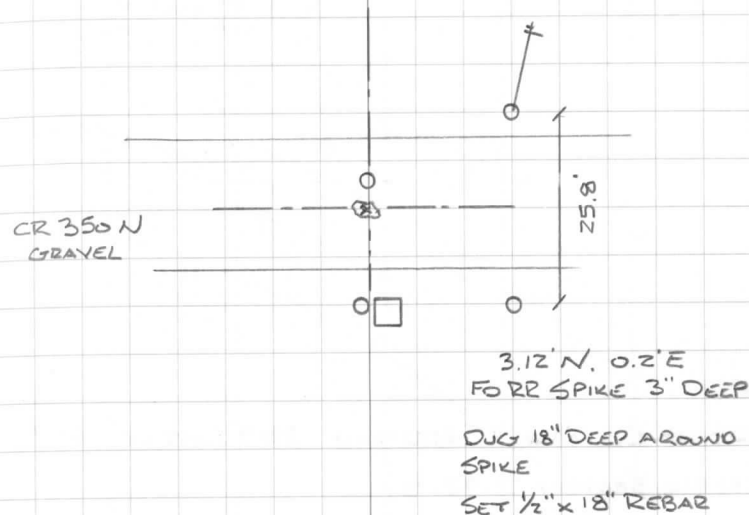

SURVEY RECORD BOOK 4 P. 78 APRIL 23 1889
CALLS FOR: STONE (LONG) WITH BRICK UNDERNEATH

PT 120 OLD TIES: RIP 15'S & RIP NW

DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN POWER POLE

SSW 22.26'

E CRYSTAL LAKE RD

S 46.5'


FACE
4" ANGLE IRON FCP IN CONC

S 73.42'

POB OF CEL-MAR 1ST ADDITION 2819' EAST OF SW
CORNER SECTION 7-32-5

HARRISON

49

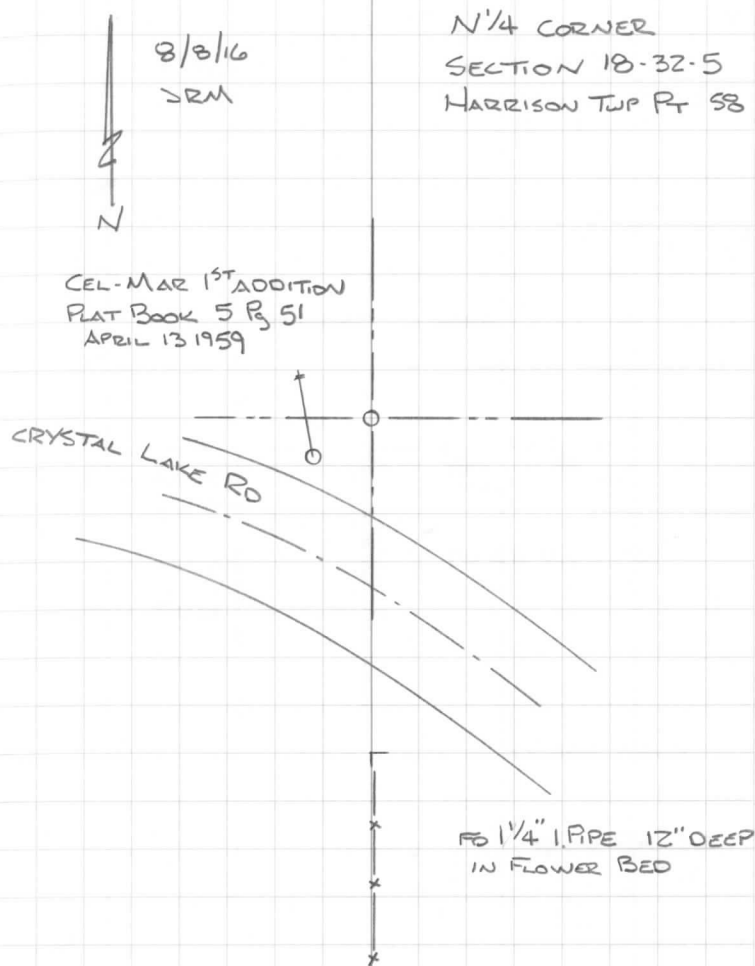

SEE KIMPEL SURVEY 1/16/2006 DOC # 200600003469



8/8/16
DEM

NW CORNER
SECTION 13-32-4
HARRISON TWP PT 55

WOODED AREA

x — x — x
FENCE REMAINS

— x

x — x — x
OAK OAK

FO RR RAIL FCP

BEAN FIELD

x
x
x

BEAN FIELD

GUN RANGE


DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN POWER POLE	WNW	69.56'
NAIL IN B. CAP IN POWER POLE	NE	29.30'
REBAR W "KIMPEL" CAP	E	20.00'
RR RAIL FCP IN CONC	SE	25.03'

HARRISON

51

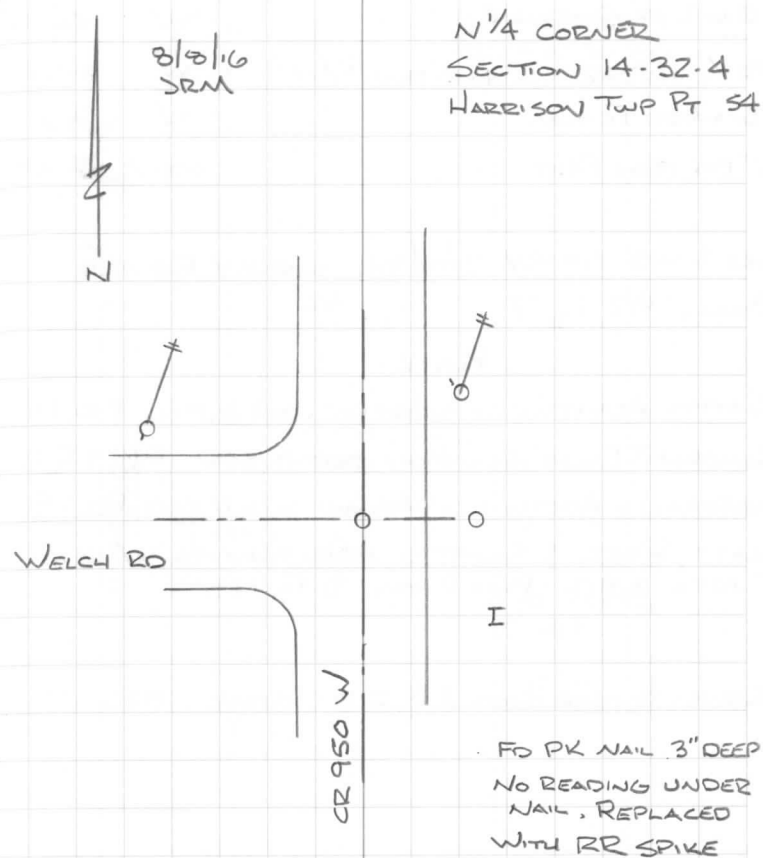

DESCRIPTION

BEARING DISTANCE

BACK OF SIDEWALK		W	63.0'
FO 1/2" REBAR	1.65' FROM B/W	W	61.35'
6" WOOD FENCE		N	4.1'
2" DIA IRON POST		SSW	5.85'

SEE LONG SURVEY 3/19/1989 SURVEY RECORD
BOOK 92 P. 7


PLATS

KNOTT'S ADDITION TO WARSAW OCT 21, 1836 PB 1 P. 7
RUNYAN & ELLIS ADDITION SEPT 9, 1854 PB 1 P. 10
CHAPMAN'S ADDITION TO WARSAW JULY 17, 1862 PB 1 P. 47
SCOTT, REED & SCOTT'S ADDITION TO WARSAW
APRIL 3, 1913 PLAT BOOK 3 P. 125

SURVEY RECORD BOOK 3 P. 218 - STONE 1925

WAYNE

52

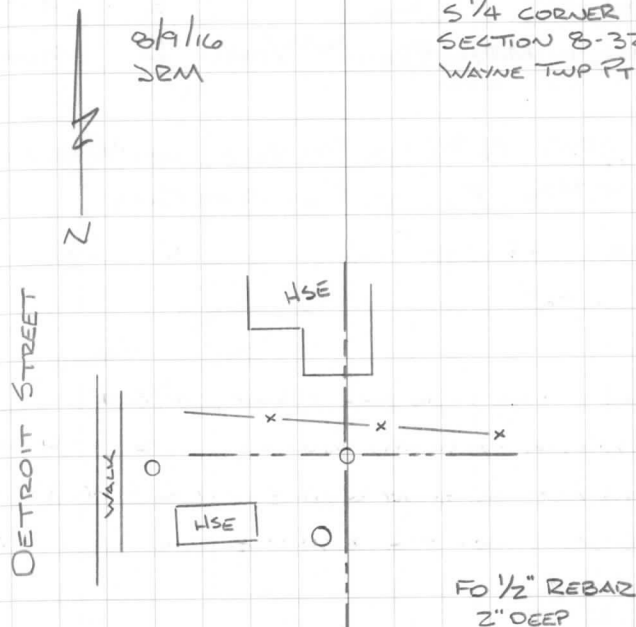

DESCRIPTION

BEARING DISTANCE

FD 3" IRON POST 4' TALL

E 4.0'


FD PK NAIL IN NIPSCO POLE 628/744

E 8.01'

2/3/1992 DRM - FD 3/4" IRON PIPE BENT, SET 1/2" REBAR
AT BASE OF PIPE, FD STEEL POST 4 FT EAST

WAYNE

53

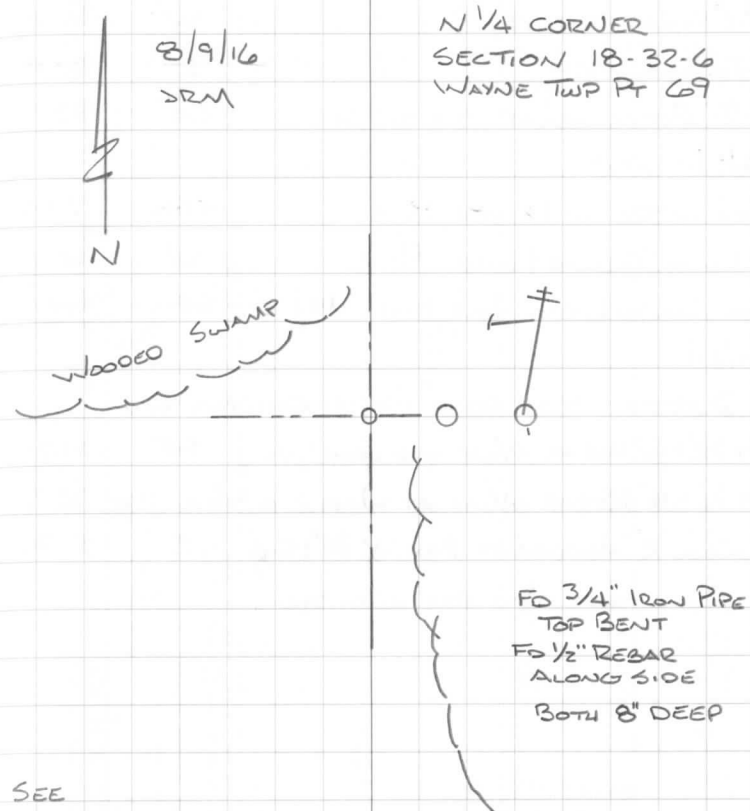


SEE

SURVEY RECORD BOOK 21 P. 84

SURVEY RECORD BOOK 40 P. 79 SEPT 24, 1979

DESCRIPTION	BEARING	DISTANCE
1 SET MAG NAIL IN NIPSCO P. POLE 1052284	NW	84.04'
SET MAG NAIL IN NIPSCO P. POLE 1071075	SSW	84.54'
SET MAG NAIL IN NIPSCO P. POLE 1066001	WSW	86.59'

VAN BUREN

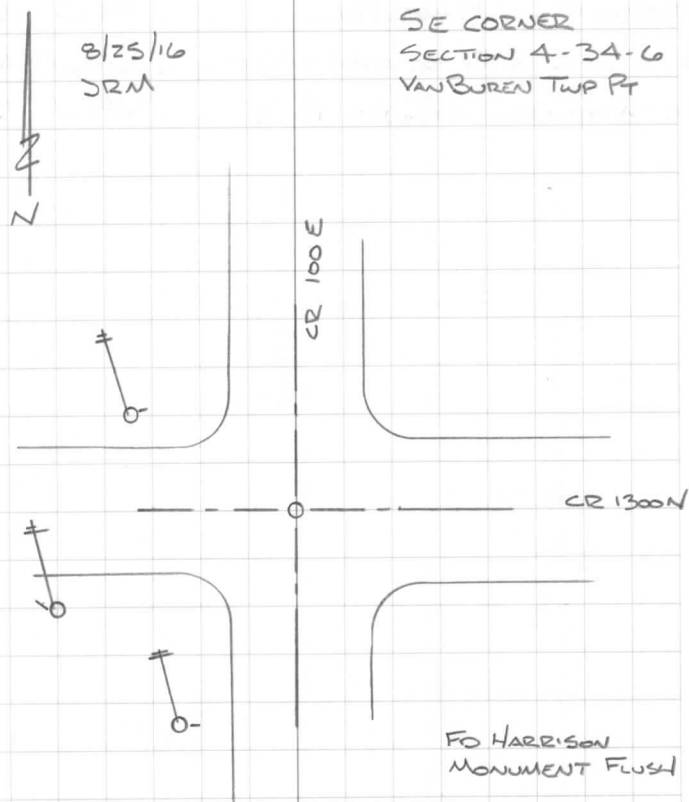

FIELD BOOK Pg 35 - 8/6/91 ALL OLD TIES GONE

DESCRIPTION

BEARING DISTANCE

SET MAG NAIL IN POWER POLE	ESE	58.13'
1/2 12" SQ CONC FENCE CORNER POST	SSW	47.73'
SET MAG NAIL IN POWER POLE	WSW	31.00'

FRANKLIN

56



8/29/16
JRM

SE CORNER
SECTION 11-31-4
FRANKLIN TWP PT 49

STATE ROAD 19

CR 600 S

FO HARRISON
MONUMENT
FLUSH

DESCRIPTION


BEARING DISTANCE

℄ RAILROAD TRACK	4.71' GAGE	W	50.145'
℄ OF A 5" SQ CONK FCP TO ℄ OF TRACKS			28.20'
SET 1/2" REBAR W/CAP	9' TO E/P	NE	33.70'
SET MAG NAIL IN POWER POLE		ENE	18.42'
℄ OF A RR RAIL FCP		E	20.13'

10/17/16 AFTER PAVING SET MAG NAIL WITH WASHER

PLAIN

57

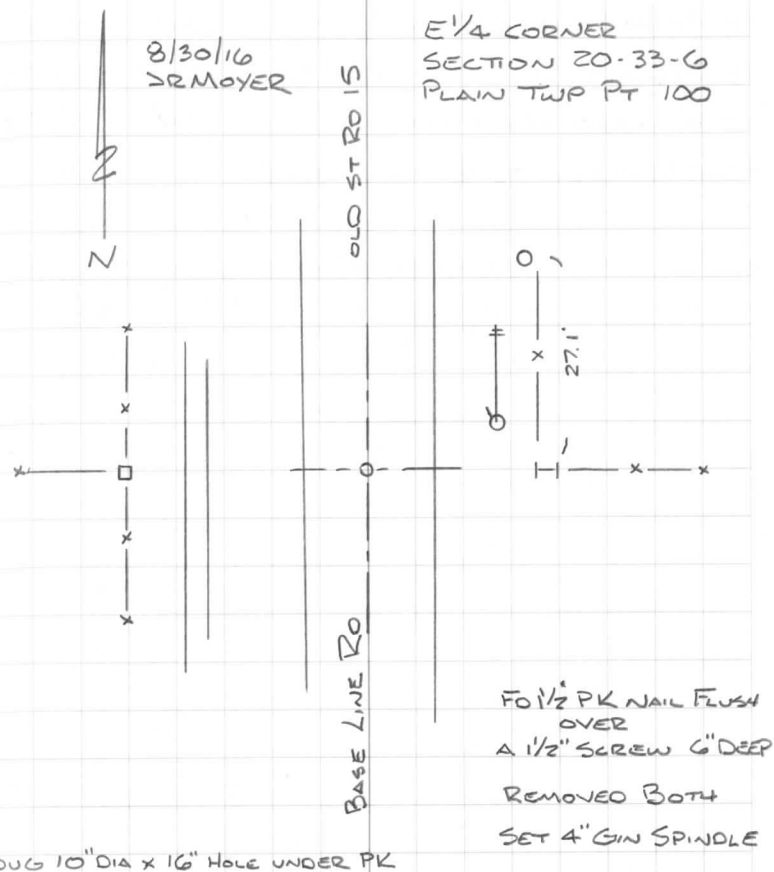

SURVEY RECORD BOOK 3 Pg 118 AUGUST 8, 1918
CALLS FOR STONE W 1/4 CORNER SEC 21-33-6

DESCRIPTION


BEARING DISTANCE

SET NAIL IN B. CAP IN POWER POLE	NE	42.83'
1/2" REBAR W/CAP 76' TO E/P	SE	24.79'
⊥ RAILROAD MAIN TRACK	W	56.86'
⊥ RR RAIL FCP TO ⊥ MAIN TRACK		30.98'

10/17/16 AFTER PAVING SET MAG NAIL WITH WASHER

PLAIN

58

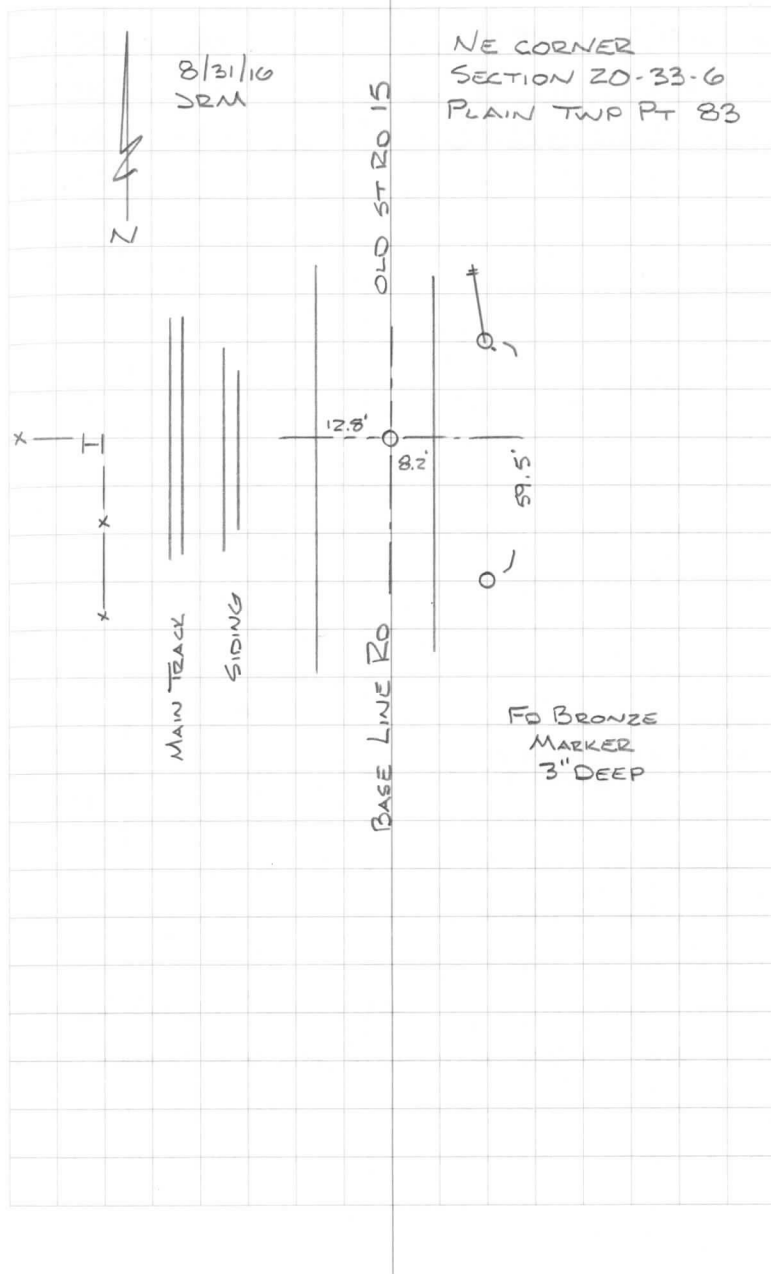

DESCRIPTION

BEARING DISTANCE

DESCRIPTION	BEARING	DISTANCE
NAIL IN B. CAP IN TEL POLE	NE	20.48'
2" DIA IRON PIPE FLUSH	S	20.00'
NAIL IN B. CAP IN NIPSCO PP ^{630/} 255	SW	40.51'


PLAIN

59

9/1/16
REMOVED

N

N 1/4 CORNER
SECTION 9-33-6
PLAIN TWP PT 32

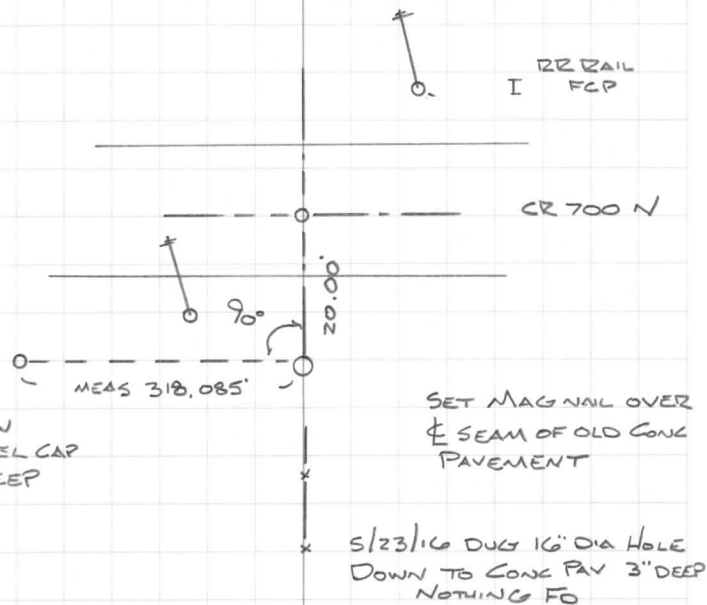

KIMPEL SURVEY # 20001111760

SURVEY RECORD BOOK 3 P. 13 CALLS FOR STONE 1898

DESCRIPTION


BEARING DISTANCE

NAIL IN B. CAP IN POWER POLE	WNW	66.28'
NEAREST CORNER RR RAIL FCP	NW	33.97'
SET 1/2" REBAR W/CAP 13.3' FROM E/P	NNW	42.45'
FACE OF A LEANING 10" CONC FCP	E	23.86'
NAIL IN B. CAP IN POWER POLE	SE	29.67'

6/20/17 - SET MAG NAIL IN TAG FROM WITNESSES

CLAY

60

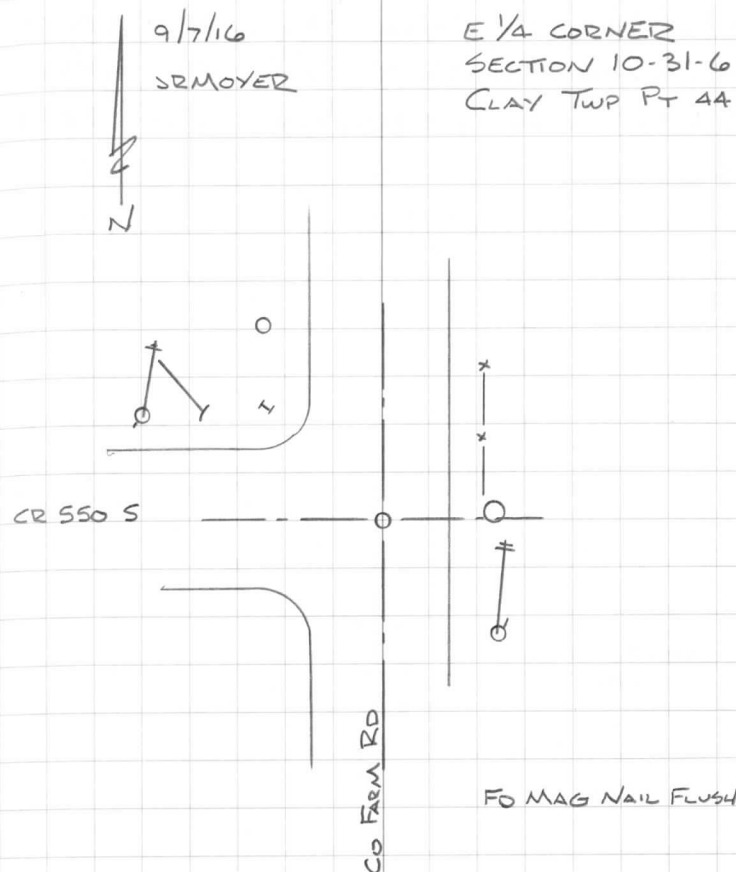

DESCRIPTION


BEARING DISTANCE

SET 1/2" REBAR w/CAP	10' FROM E/GRAVEL	NW	28.07'
NAIL IN B. CAP IN REMC POWER POLE	⁶⁴⁸⁹	ENE	27.68'
SET 1/2" REBAR w/CAP	10.5' FROM E/GRAVEL	SW	28.29

SURVEY FIELD BOOK 9 Pg 1 1975 CALLS FOR SPIKE

PRAIRIE

61

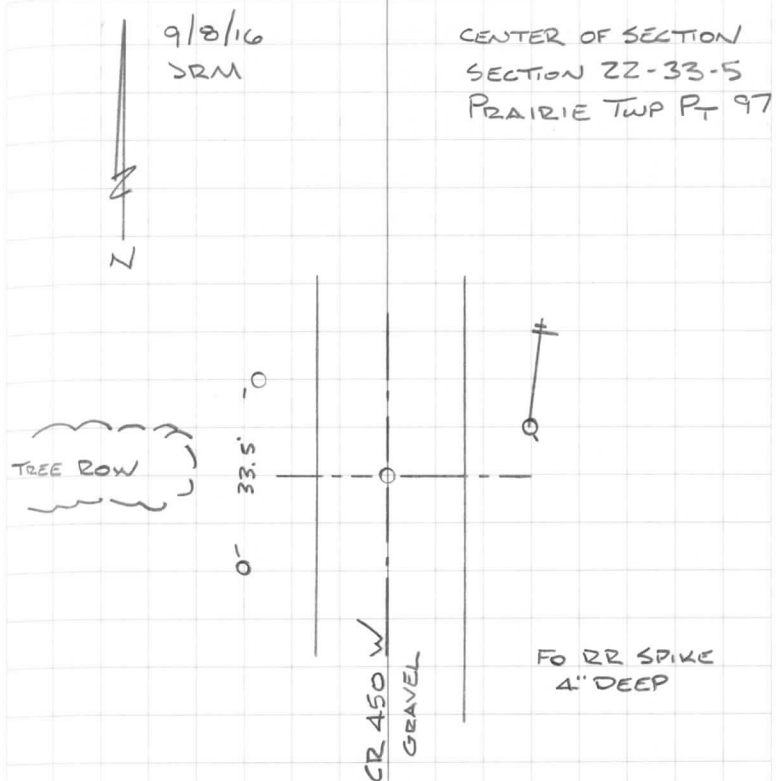


DESCRIPTION

BEARING DISTANCE

SET 1/2" REBAR W/CAP 7.8' FROM E/P	NE	19.20'
NAIL IN B. CAP IN POWER POLE	SE	44.72'
NEAREST EDGE AT BASE RR RAIL FCP	SE	34.65'
NAIL IN B. CAP IN TRANSFORMER POLE	SSW	64.62'
NEAREST EDGE AT BASE RR RAIL FCP	WSW	33.8'

PRAIRIE

62

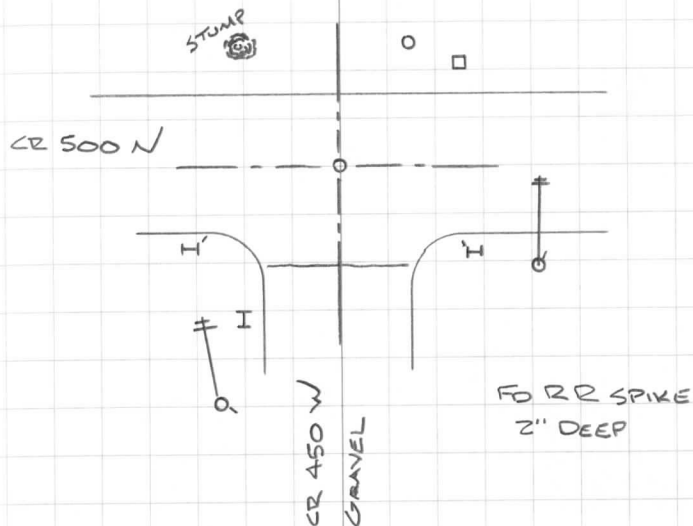9/8/16
JRMN 1/4 CORNER
SECTION 22-33-5
PRAIRIE TWP PT 86

DESCRIPTION

BEARING DISTANCE


5 NAIL IN B. CAP IN POWER POLE	NNE	20.74'
1 SET 1/2" REBAR W/CAP 9.5' FROM E/P	E	48.53'
1 HARRISON MONUMENT	S	25.41'
1 FO 1/2" REBAR W/CAP	SW	17.35'

SURVEY RECORD BOOK 4 Pg 206 MARCH 4 1910

FO STONE FOR SE CORNER SEC 12-32-4
38 LNS NORTH (25.08') OF STONE

HARRISON

63

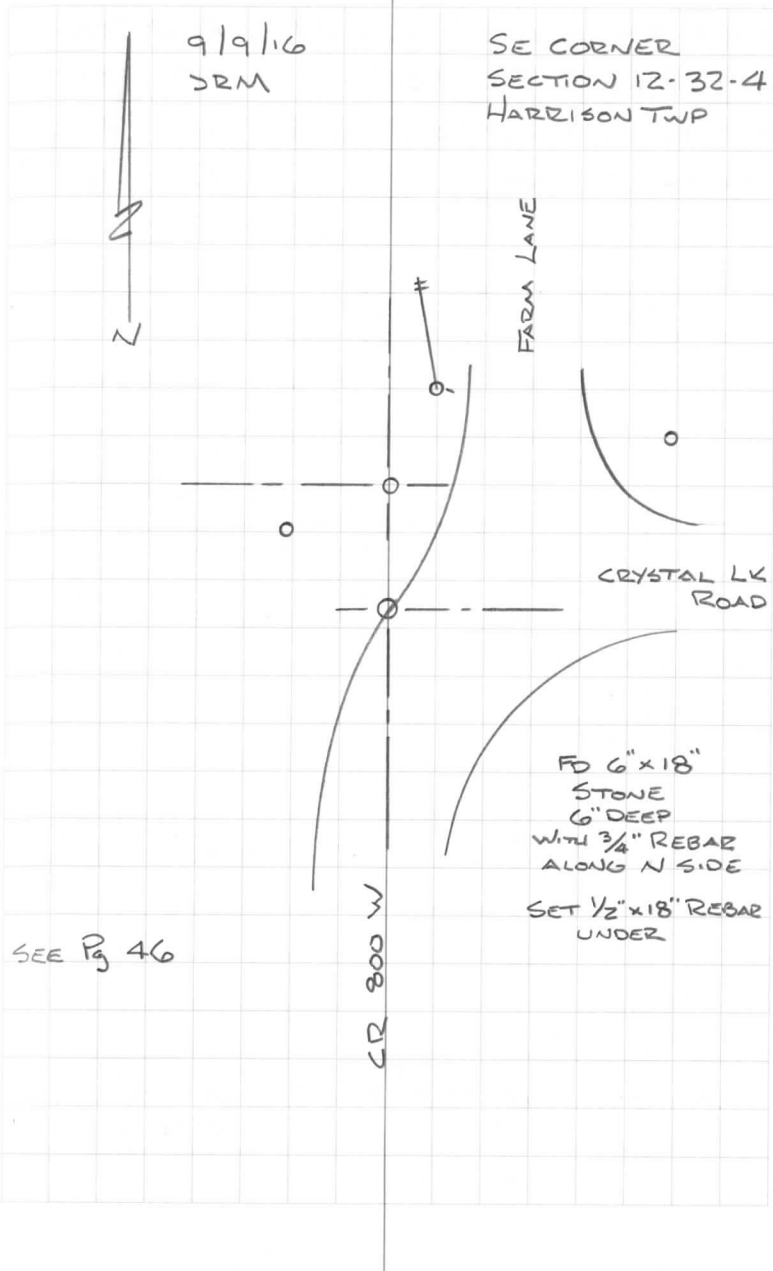


DESCRIPTION

BEARING DISTANCE

1 SET 1/2" REBAR W/CAP 7.6' FROM E/P	NW	24.45'
1 NEAREST EDGE RR RAIL FCP	NNE	23.24'
1 SET 1/2" REBAR W/CAP 10.4' FROM E/P	NE	43.63'
1 FO PK NAIL 2" DEEP	E	8.45'

WAYNE

64

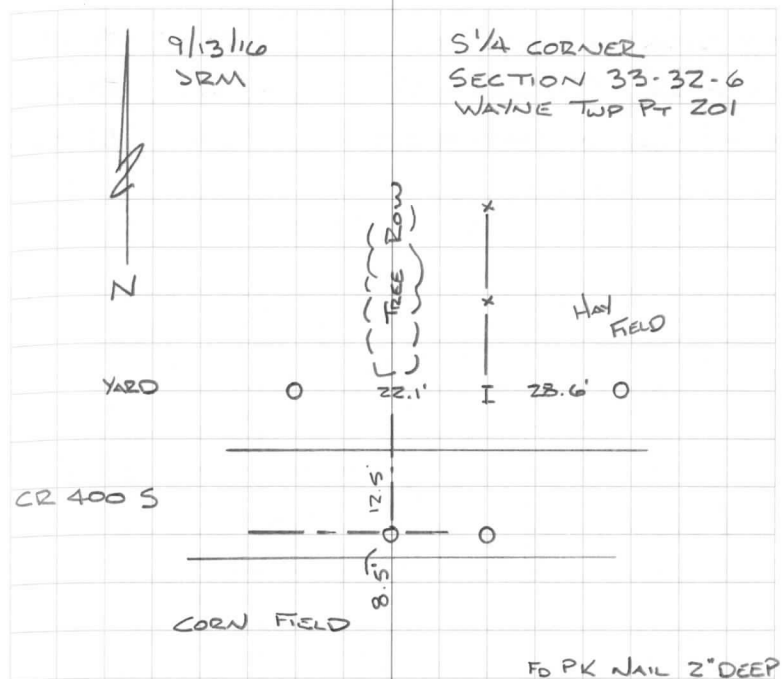

KIMPEL SURVEY/ JUNE 1999 OAC # 99-08-1757

DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN POWER POLE	NNW	19.42'
NEAREST EDGE RR RAIL FCP	NE	20.85'
NAIL IN B. CAP IN TRANSFORMER POLE	SW	56.56'

SURVEY FIELD BOOK 9 Pg 19 1975 OLD WITNESS
SW EDGE RIP NE 20.9'


WAYNE

65



9/13/16
JRM

SW CORNER
SECTION 33-32-6
WAYNE TWP PT 200

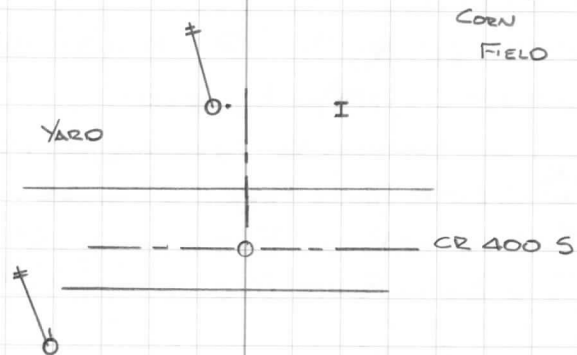

CORN FIELD

FOR RR SPIKE 4" DEEP
TOP BENT

REPLACED WITH RR
SPIKE FLUSH

DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN POWER POLE	SE	70.32'
NEAREST EDGE BRIDGE BEAM FCP	SE	49.36'
NAIL IN B. CAP IN POWER POLE	SSW	56.86'
NAIL IN B. CAP IN POWER POLE	WSW	77.14'
NEAREST EDGE 4"x9" BRIDGE BEAM FCP	WNW	40.95'
FO PK NAIL FLUSH	E	4.56'

6/20/7 - SET MAG NAIL IN TAG FROM WITNESSES

MAG NAIL OVER CONC PAV & 6" DEEP

WITNESS TO SW CORNER SE 1/4 SW 1/4


SAME NAIL IN B. CAP IN POWER POLE	SE	66.08'
SAME NAIL IN B. CAP IN POWER POLE	SSW	58.82'
SAME NAIL IN B. CAP IN POWER POLE	WSW	81.41'

CLAY

66

9/13/16
JRM

NW CORNER
SECTION 2-31-6
CLAY TWP PT 9

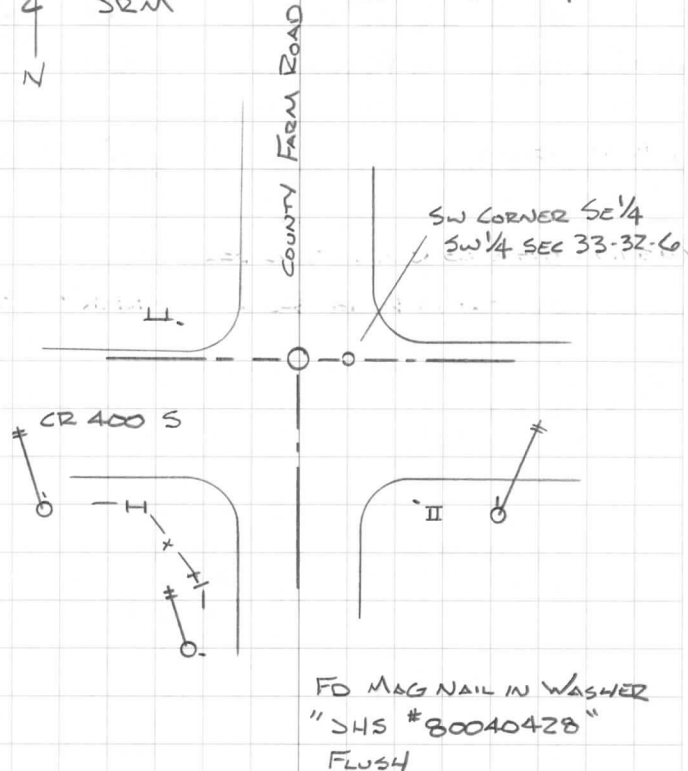

SEE KIMPEL SURVEY - JUNE 1999 DOC # 99-08-1757

DESCRIPTION


BEARING DISTANCE

SET 1/2" REBAR W/CAP 12' FROM E/P	NE	38.06'
1 NAIL IN B. CAP IN POWER POLE	ENE	79.49'
NAIL IN B. CAP IN POWER POLE	SE	43.21'
SET 1/2" REBAR W/CAP UNDER GUARD RAIL	SW	31.45'

6/20/17 - SET MAG NAIL IN TAG FROM WITNESSES

CLAY

68

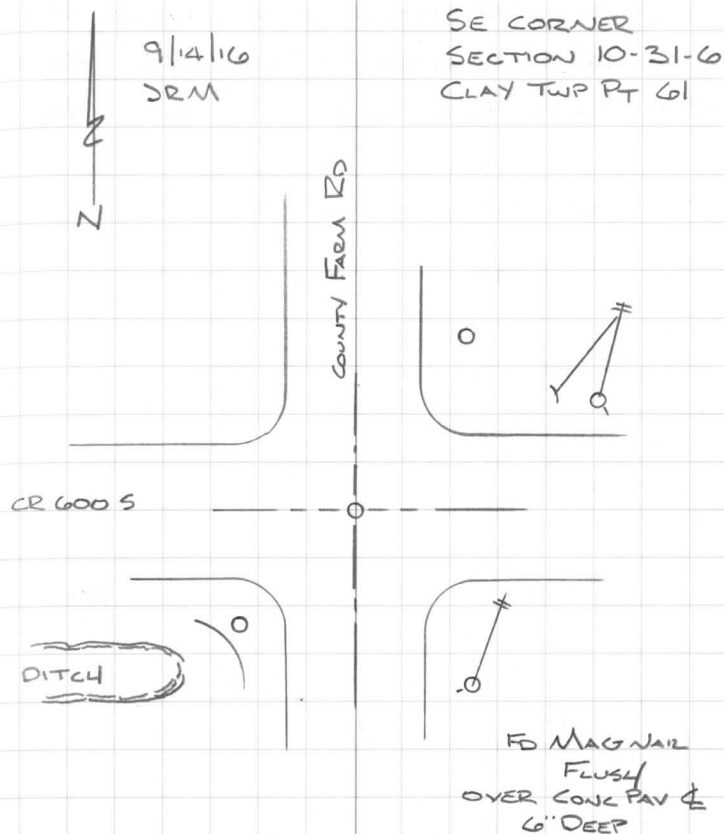

SURVEY RECORD BOOK 2 (COPY) Pg 86 - STONE
SEPT 28, 1914 - SET GUN BARREL IN ROAD 15.03 CHAINS
SOUTH

DESCRIPTION


BEARING DISTANCE

SET 1/2" REBAR W/CAP 14.5' FROM E/P	NW	27.42'
SET 1/2" REBAR W/CAP AT BASE OF ROCK	NE	30.82'
FO "KIMPEL" CAPPED IRON	E	19.97'

6/20/17 - SET MAGNAIL IN TAG FROM WITNESSES


CLAY

69



9/14/15
JRM

E 1/4 CORNER
SECTION 15-31-6
CLAY TWP PT 70

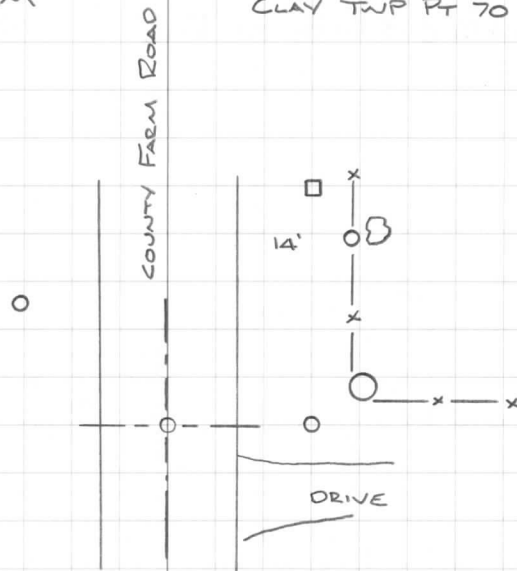

FO MAG NAIL 3" DEEP

SEE KIMPEL SURVEY - NOVEMBER 2010
DOC # 2011010146

DESCRIPTION

BEARING DISTANCE

NEAREST EDGE OF A RR RAIL FCP

NE 23.54'

1/2" REBAR W/CAP 5' FROM E/P


SE 23.60'

NAIL IN B. CAP IN POWER POLE

WSW 99.84'

WAYNE

70

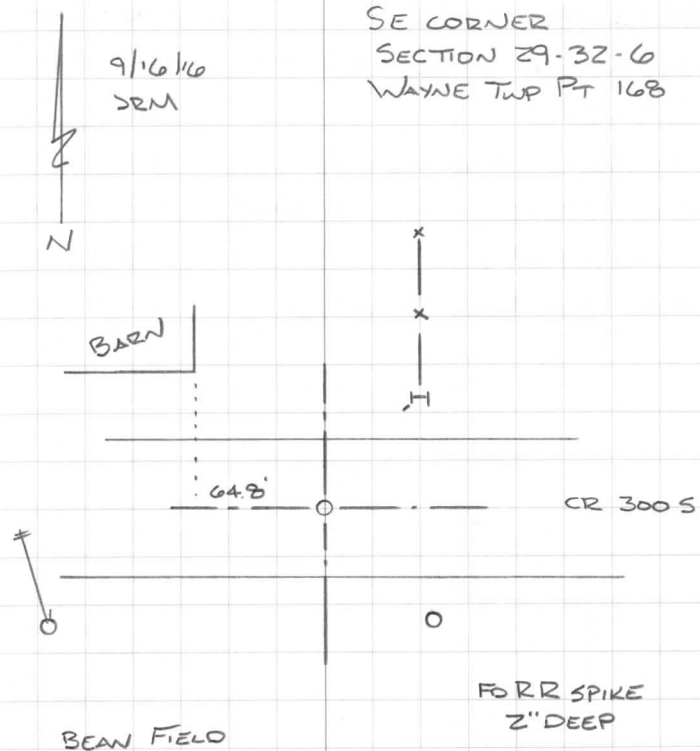

DESCRIPTION

BEARING DISTANCE

£ RR RAIL FCP	N	22.88'
FO NAIL IN B. CAP IN P. POLE 636/576	N	20.01'
£ RR RAIL FCP	NE	25.15'
£ OF TOP NUT ON FIRE HYDRANT	SE	57.01'
FO NAIL IN B. CAP IN P. POLE 632/167	S	17.06'
£ RR RAIL FCP	S	20.00'
NE CORNER CONC BLOCK BUILDING	SW	47.17'


FIELD NOTE BOOK P₃ 207 - INTERSECTED N. BOUNDARY
AT POST

WAYNE

71



NW CORNER
SECTION 4-32-6
WAYNE TWP PT 8

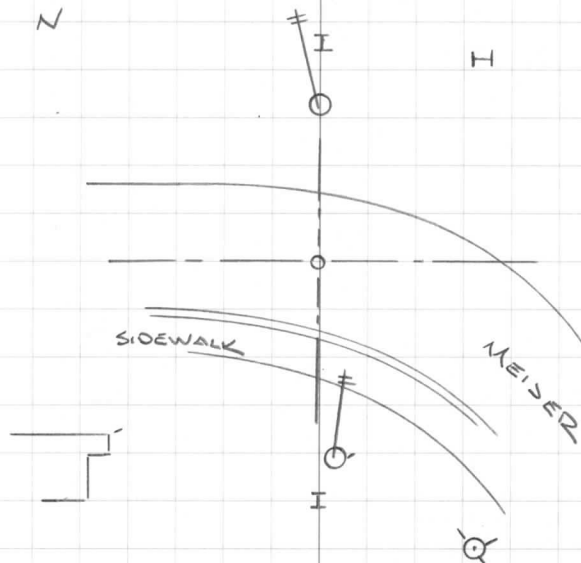

FO PK NAIL IN WASHER
"ABONMARCHE" 2" DEEP
DUG 8" DEEP NOTHING ELSE
SET 4" GIN SPINDLE

DESCRIPTION

 $\frac{1}{2}$ " REBAR w/CAP $\frac{1}{2}$ " REBAR w/CAP

DRAIN PIPE

BEARING DISTANCE

NE 3.70'

SE 6.65'


SE 12'

BROWER SURVEY - JANUARY 1978

WALKER SURVEY - DECEMBER 1997

WAYNE

72

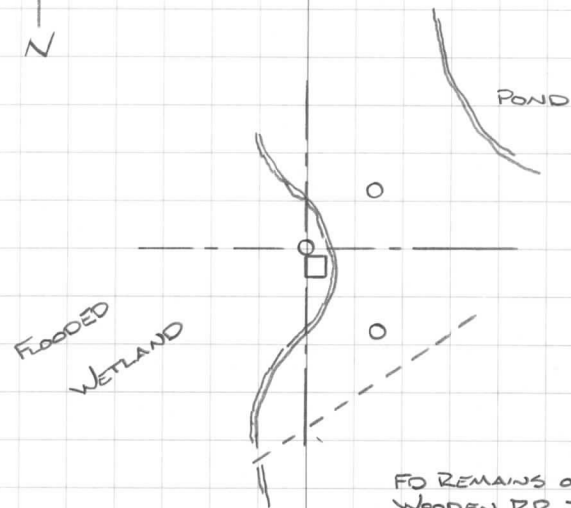9/20/16
JRMNE CORNER
SECTION 22-32-6
WAYNE TWP PT 108FO REMAINS OF A
WOODEN RR TIE
LEAVING SOUTHSET $\frac{1}{2}$ " x 24" REBAR
WITH CAP AT BASE OF POST

DESCRIPTION

BEARING DISTANCE

GARAGE

N 8.5'

TREASURE HILLS ESTATES PLAT BOOK 5 Pg 67

MENDENHALL SURVEY DATED 2/4/04


DOC # 98-02-0272

WAYNE

73

9/20/16
JRM

N¹/₄ CORNER
SECTION 22-32-6
WAYNE TWP PT 107

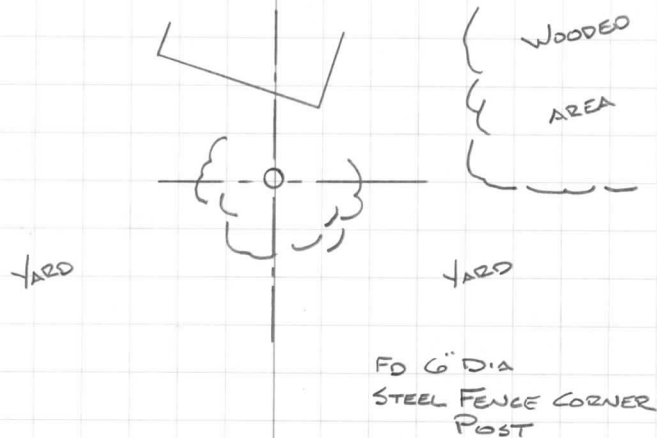

DESCRIPTION

BEARING DISTANCE

39" DIA BURR OAK TREE

SW

15'

36" DIA BLACK WALNUT TREE

NE

22.5'

CHERRY CREEK MANOR PLAT BOOK 13 Pg 27

KELLY ADDITION ON CHERRY CREEK 2ND ADDITION

WALKER SURVEY DATED SEPTEMBER 20, 2006

SURVEY RECORD BOOK 2 (COPY) Pg 198 - STONE APRIL 1885

WAYNE

74



9/20/16

JRM

E 1/4 CORNER
SECTION 22-32-6
WAYNE TWP PT 117



FOUR RAIL
FENCE COR POST
5' TALL

9/20/16


JRM



SE CORNER
SECTION 22-32-6
WAYNE TWP PT 140

YARD

CORN FIELD

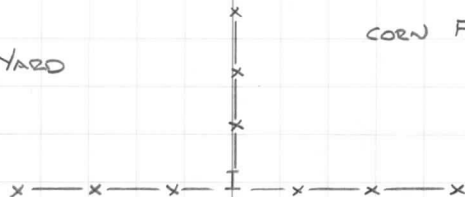

HAY FIELD

FO RR RAIL
FCP
4' TALL

CHERRY CREEK MANOR

WALKER SURVEY DATED APRIL 15TH, 2008

DESCRIPTION

BEARING DISTANCE

& 37" DIA OAK
 & 26" DIA OAK
 & 39" DIA OAK IN FENCE ROW
 FO CAPPED IRON IN FENCE ROW

W 32'
 N 27'
 E 17'
 E 52.2'

WAYNE

76



9/21/16
SRM

CENTER OF SECTION
SECTION 22-32-6
WAYNE TWP PT



x



x

x

O



LOT 9

LOT 10

x
x

FO 2 1/2" DIA STEEL
FENCE CORNER POST
WITH REMAINS OF
OLD FENCE

WOODED HILLS PLAT BOOK 14 Pg 19

SURVEY RECORD BOOK 3 Pg 254 1928
7" OAK 18" NORTH OF CORNER

WALKER SURVEY DATED JULY 20TH 2004 #200413640

DESCRIPTION

BEARING DISTANCE


NAIL IN B. CAP IN POWER POLE
 FO "HUFFMAN" CAPPED IRON FLUSH
 NAIL IN B. CAP IN POWER POLE
 BACK OF CURB

WNW 25.54'
 W 19.97'
 SE 46.55'
 W 14.85'

HUFFMAN SURVEY DATED APRIL 17, 2013 # 2013060129

WAYNE

77

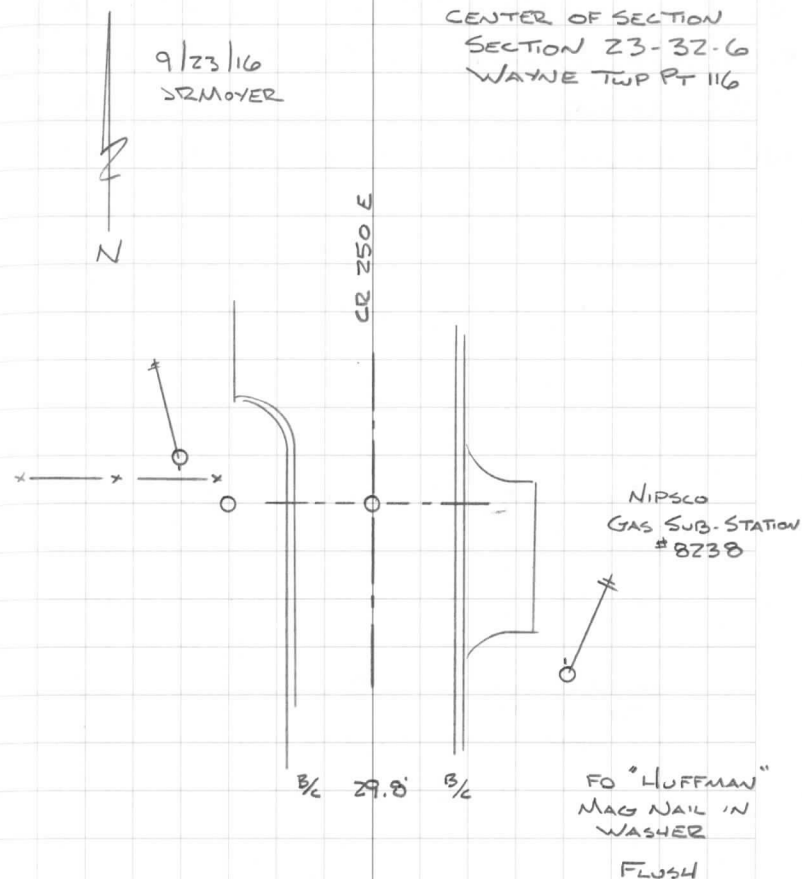

DESCRIPTION

BEARING DISTANCE

NAIL IN B. CAP IN POWER POLE	W	24.62'
RR RAIL FCP CUT OFF FLUSH TO GROUND	E	20.22'
BACK OF CURB	E	14.35'
NAIL IN B. CAP IN POWER POLE	E	28.58'


WAYNE

78



9/23/16
REMOVED

N 1/4 CORNER
SECTION 23-32-6
WAYNE TWP PT 109

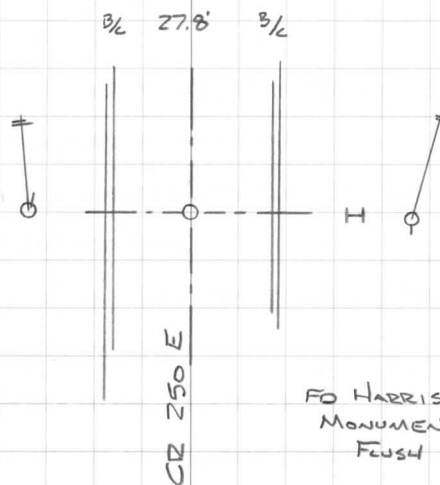

FO HARRISON
MONUMENT
FLUSH