

RICHARD J. KEMPER - SURVEYOR

Property of KOSCIUSKO COUNTY

SURVEYORS OFFICE

Address COURTHOUSE ROOM 25

100 WEST CENTER ST. - WARSAW, IN

Telephone (219) 372-2367

This Book is manufactured of a High Grade 50% Rag Ledger Paper having a Water Resistant Surface, and is sewed with Nylon Water-proof Thread.

SECTION CORNER FIELD BOOK 2
STARTED JULY 1992

INDEX

1	TIPPECANOE - N $\frac{1}{4}$ Post 15-33-7 + CENT 10-33-7
2	TIPPECANOE - W $\frac{1}{4}$ Post 10-33-7 + CENT 9-33-7
3	TIPPECANOE - W $\frac{1}{4}$ Post 9-33-7 + CENT 8-33-7
4	TIPPECANOE - W $\frac{1}{4}$ Post 8-33-7 + ^{SW} SE COR 10-33-7
5	WASHINGTON - SE COR 11-32-7 + SE COR 2-32-7
6	WASHINGTON - CENT. 2-32-7
7	FRANKLIN - NW COR. 2-31-4 + W $\frac{1}{4}$ COR. 2-31-4
8	FRANKLIN - SW COR. 2-31-4 + S $\frac{1}{4}$ COR. 2-31-4
9	FRANKLIN - SW COR. 3-31-4 + W $\frac{1}{4}$ COR. 3-31-4
10	PRAIRIE - CENT. 32-33-5 + S $\frac{1}{4}$ COR. 29-33-5
11	PRAIRIE - N $\frac{1}{4}$. 29-33-5 + NE COR. 29-33-5
12	SEWARD - W $\frac{1}{4}$ COR. 15-31-5 + NW COR. 10-31-5
13	SEWARD - NE COR. 10-31-5 + MONROE - NW COR. 4-31-7
14	MONROE - W $\frac{1}{4}$ COR. 4-31-7 + W $\frac{1}{4}$ COR. 9-31-7
15	MONROE - W $\frac{1}{4}$ COR. 21-31-7 + SW COR. 4-31-7
16	MONROE - SW COR. 21-31-7 + SW COR. 20-31-7
17	VANBUREN - CENT. 9-34-6 + W $\frac{1}{4}$ COR. 9-34-6
18	VANBUREN - CENT. 8-34-6 + W $\frac{1}{4}$ COR. 8-34-6
19	VANBUREN - CENT. 7-34-6 + W $\frac{1}{4}$ COR. 7-34-6
20	VANBUREN - W $\frac{1}{4}$ COR. 6-34-6 + NW COR. 6-34-6
21	TIPPECANOE S $\frac{1}{4}$ COR. 33-33-7 + CENT. 33-33-7
22	TURKEY CREEK - NE COR. 32-34-7 + N $\frac{1}{4}$ COR. 32-34-7
23-70	See BACK OF BOOK

Page

23	SEC. 35-34-6	NE - COR -	VANBUREN
"	" 35-34-6	E $\frac{1}{4}$ - COR -	VANBUREN
24	SEC. 19-34-5	NW - COR -	JEFFERSON
"	" 19-34-5	N $\frac{1}{4}$ - COR -	JEFFERSON
25	SEC. 19-34-5	NE - COR -	"
"	" 20-34-5	N $\frac{1}{4}$ - COR -	"
26	SEC. 20-34-5	NE - COR -	"
"	" 17-34-5	E $\frac{1}{4}$ - COR -	"
27	SEC. 17-34-5	CEN. -	" - "
"	" 17-34-5	W $\frac{1}{4}$ -	" - "
28	SEC. 17-34-5	NW -	" - "
"	" 8-34-5	NW -	" - "
29	SEC. 2-31-4	N $\frac{1}{4}$ -	" - FRANKLIN
"	" 2-31-4	CEN. -	" - "
30	SEC. 2-31-4	S $\frac{1}{4}$ - COR -	"
"	" 2-31-4	SE -	" - "
31	SEC. 14-30-6	E $\frac{1}{4}$ - COR -	LAKE
"	" 14-30-6	SE -	" - "
32	SEC. 14-30-6	S $\frac{1}{4}$ - COR -	"
"	" 15-30-6	SE -	" - "
33	SEC. 21-31-5	NE - COR -	SEWARD
"	" 21-31-5	E $\frac{1}{4}$ -	" - "
34	SEC. 15-30-5	SW - COR -	"
"	" 15-30-5	S $\frac{1}{4}$ -	" - "
35	SEC. 10-32-6	NW - COR -	WAYNE
"	" 10-32-6	N $\frac{1}{4}$ -	" - "

Pge

36	SEC. 10-32-6	CEN.	WAYNE
"	" 10-32-6	NE CORNER	"
37	SEC. 10-32-6	E $\frac{1}{4}$ CORNER	WAYNE
"	" 10-32-6	SE	"
38	SEC. 6-30-5	SW CORNER	FRANKLIN
"	" 34-31-4	SW	"
39	SEC. 34-31-4	W $\frac{1}{4}$ CORNER	FRANKLIN
"	" 34-31-4	NW	"
40	SEC. 22-31-4	SW CORNER	FRANKLIN
"	" 22-31-4	W $\frac{1}{4}$	"
41	SEC. 33-31-7	SE CORNER	JACKSON
"	" 33-31-7	S $\frac{1}{4}$	"
42	SEC. 33-31-7	SW CORNER	JACKSON
"	" 4-33-7	W $\frac{1}{4}$	"
43	SEC. 4-30-7	SW CORNER	JACKSON
44	SEC. 25-33-4	S $\frac{1}{4}$ CORNER	ETNA
"	SEC. 25-33-4	N $\frac{1}{4}$	"
45	SEC. 26-34-5	SE CORNER	JEFFERSON
"	" 26-34-5	E $\frac{1}{4}$	"
46	SEC. 26-34-5	NE $\frac{1}{4}$	"
"	SEC. 23-34-5	E $\frac{1}{4}$	"
47	SEC. 36-33-5	E $\frac{1}{4}$	PRAIRIE
"	SEC. 31-33-6	NW	PLAIN
48	SEC. 25-33-5	W $\frac{1}{4}$	PRAIRIE
"	SEC. 30-33-6	NW	PLAIN

For Page 49 Turn To page 76

INDEX OF CURVE AND REDUCTION TABLES

Table I—SLOPE STAKE

Table II—STADIA CORRECTION AND HORIZONTAL DISTANCES

Table III—TRIGONOMETRIC FORMULAE

Table IV—NATURAL TRIGONOMETRICAL FUNCTIONS

CURVE FORMULAE

Table V—TANGENTS AND EXTERNALS TO A 1° CURVE

USEFUL RELATIONS

Table VI—INCHES TO DECIMALS OF A FOOT

Table VII—MINUTES IN DECIMALS OF A DEGREE

Table VIII—MIDDLE ORDINATES OF RAILS

Table IX—SHORT RADIUS CURVES

Table X—RODS IN FEET, 10THS AND 100THS OF FEET

Table XI—LINKS IN FEET, 10THS AND 100THS OF FEET

49	SEC.	24.33.5	E 1/4 COR.	PRAIRIE		
"	SEC.	24.33.5	NE COR.	PRAIRIE		
50	SEC.	22.34.4	NW COR.	SCOTT		
"	SEC.	15.34.4	NW COR.	"		
51	SEC.	10.34.4	W 1/4 COR.	"		
"	SEC.	10.34.4	NW COR.	"		
52	SEC.	24.33.4	E 1/4 COR.	TIPPECANOE		
"	SEC.	24.33.7	NE COR.	"		
53	SEC.	13.33.7	E 1/4 COR.	"		
"	SEC.	13.33.7	NE "	"		
54	SEC.	31.34.7	NE "	TURKEY CREEK		
"	SEC.	30.34.7	E 1/4 "	"	"	
55	"	30.34.7	NE "	"	"	
"	"	19.34.7	E 1/4 "	"	"	
56	"	11.32.6	S 1/4 "	WAYNE		
"	"	11.32.6	SE "	"		
57	"	12.32.6	S 1/4 "	"		
"	"	12.32.6	SE "	"		
58	"	4.31.7	E 1/4 "	MONROE		
"	"	4.31.7	SE "	"		
59	"	31.33.5	SW "	PRAIRIE		
"	"	31.33.5	E 1/4 "	"		
60	"	30.33.5	NE "	"		
"	"	28.33.5	N 1/4 "	"		
61	"	1.31.6	NW "	CLAY		


Page

62	SEC.	21-31-5	SE	COR.	SEWARD
"	"	28-31-5	E $\frac{1}{4}$	"	"
63	"	28-31-5	S $\frac{1}{4}$	"	"
"	"	28-31-5	SW	"	"
64	"	8-30-6	NW	"	LAKE
"	"	8-30-6	N $\frac{1}{4}$	"	"
65	"	32-33-7	SE	"	TIPPECANOE
66	"	6-32-5	SE	"	HARRISON
"	"	6-32-5	SE	"	"
67	"	6-32-5	SW	"	"
"	"	6-32-5	W $\frac{1}{4}$	"	"
68	"	14-33-7	S $\frac{1}{4}$	"	TIPPECANOE
"	"	14-33-7	SE $\frac{1}{2}$ SE $\frac{1}{4}$	"	"
69	"	14-33-7	SE	"	"
70	"	27-32-5	S $\frac{1}{4}$	"	HARRISON
71	"	27-34-6	SE + SW	"	VAN BUREN
72	"	15-33-4	N $\frac{1}{4}$	"	ETNA
73	"	29-33-6	CENTER	"	PLAIN

DESCRIPTION	BEARING	DISTANCE
FO NAIL IN BOTTLE CAP IN SW FACE OF NIPSCO LIGHT POLE 623/397	NW	26.51'
CENTER OF A BEEHIVE STORM SEWER GRATE	NE	20.05'
FO NAIL IN BOTTLE CAP IN SE FACE OF NIPSCO POWER POLE 623/131	SW	29.58'
SW COR HOUSE	NE	
1/2" CAPPED I. RESOR	NW	35.24'
" " " 7/2/01	SW	44.02'
" " " MK + EO	SE	48.55'
6/13/18 HARRISON MONUMENT FLUSH		

SET NAIL IN BOTTLE CAP IN SOUTH FACE OF NIPSCO POWER POLE 634/492	ENE	65.63'
SET NAIL IN BOTTLE CAP IN WEST FACE OF NIPSCO POWER POLE 633/546	SSE	48.91'
SET NAIL IN BOTTLE CAP IN NORTH FACE OF OF A TELEPHONE POLE MAG NAIL	WSW	60.45'

6/13/18 BRONZE MONUMENT REMOVED DURING SEWER
PROJECT, REPLACED WITH MAG NAIL w/ CO TAG

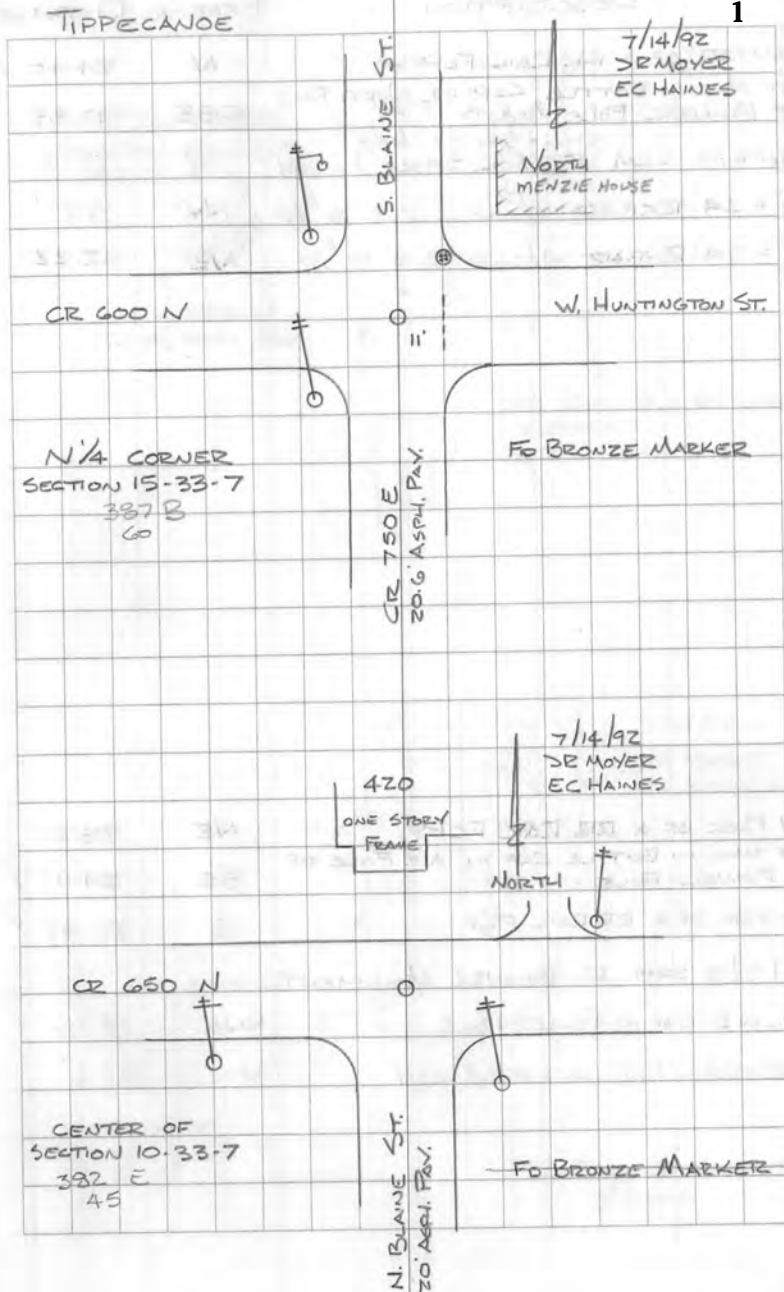

DESCRIPTION


BEARING DISTANCE

CENTER OF A RR RAIL FCP	N	24.40'
SET NAIL IN BOTTLE CAP IN NORTH FACE OF POWER POLE	ESE	97.55'
6/13/18 2RM FD RR SPIKE FLUSH		
1/2" x 24" REBAR W/CAP 12.8' TO E/P	NW	31.77'
1/2" x 24" REBAR W/CAP 12.4' TO E/P	NE	32.22'

SW FACE OF A RR RAIL FCP	NE	38.30'
SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	SE	24.97'
CENTER OF A RR RAIL FCP	S	20.42'
6/13/18 2RM FD BRONZE MONUMENT		
NAIL IN B. CAP IN POWER POLE	NNE	75.06'
1/2" RR RAIL FCP CUT OFF FLUSH	NW	35.6'


TIPPECANOE

2

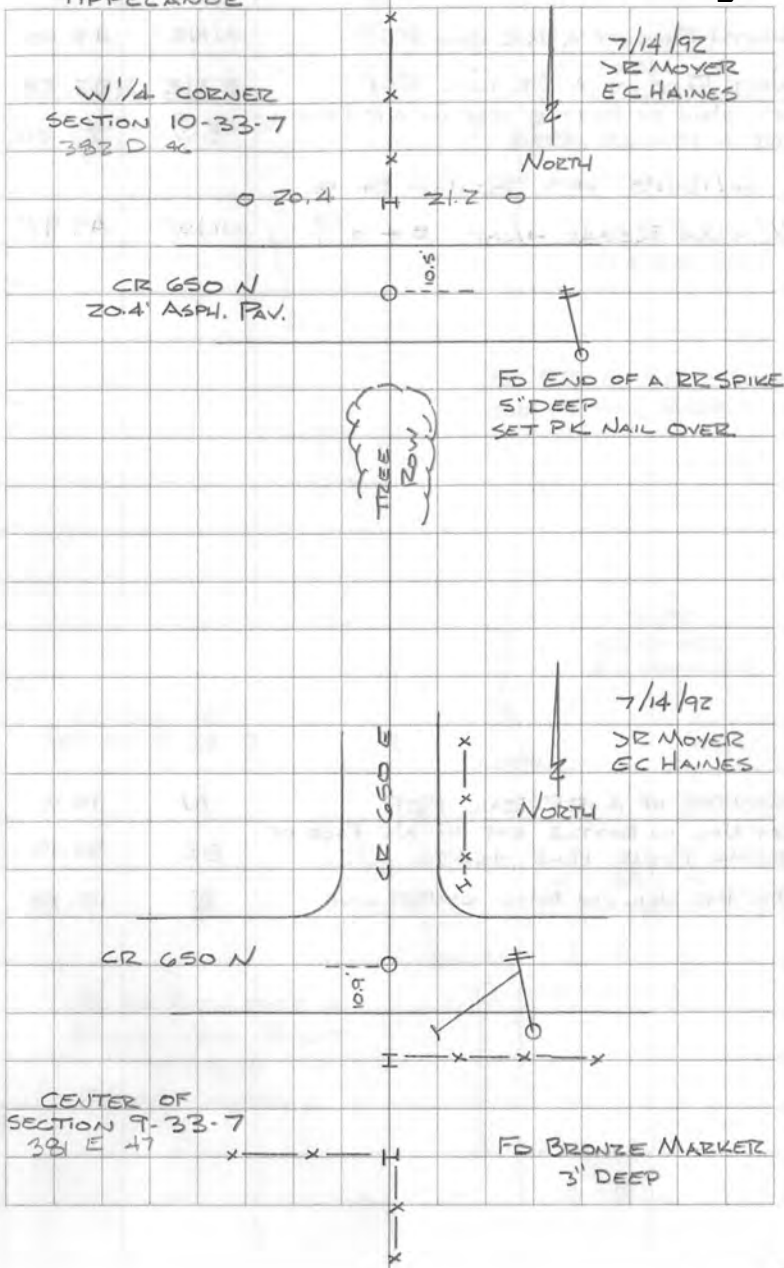

DESCRIPTION	BEARING	DISTANCE
SOUTH FACE OF A RR RAIL FCP	NNE	45.00'
WEST FACE OF A RR RAIL FCP	ENE	42.28'
SET NAIL IN BOTTLE CAP IN NW FACE OF A POWER POLE	SW	21.05'
6/13/18 DEM FO RR SPIKE		
1/2" x 24" REBAR w/CAP 8.4' to E/P	NNW	49.98'


CENTER OF A RR RAIL FCP	N	19.76'
SET NAIL IN BOTTLE CAP IN NE FACE OF REMC POWER POLE 4667	SE	21.19'
FO PK NAIL IN ROAD CENTERLINE	E	10.58'
8/22/18 DEM FO BOLT 5" DEEP		
1/2" x 24" REBAR w/CAP 10' to E/P	SW	22.52'
NAIL IN B. CAP IN POWER POLE	SSE	21.51'

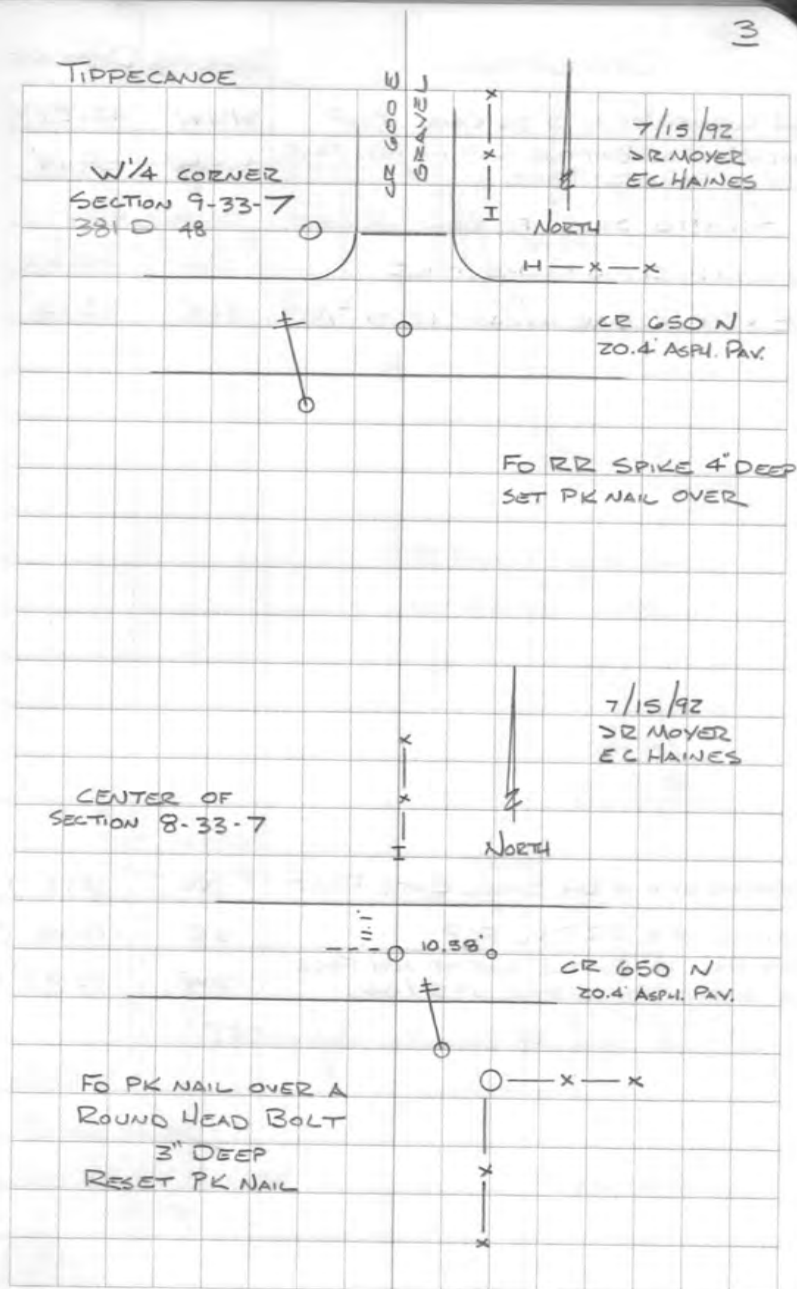

DESCRIPTION	BEARING	DISTANCE
SE CORNER OF A 10" SQ CONG. FCP	WNW	42.37'
SET NAIL IN BOTTLE CAP IN NW FACE OF A POWER POLE	WSW	59.14'
8/22/18 DEM FD BOLT 6" DEEP		
NAIL IN B. CAP IN POWER POLE	SW	58.60'
1/2" x 24" REBAR W/CAP 12' TO E/P	SSE	23.10'

CENTER OF A 4" DIA STEEL GATE POST	NE	31.17' ✓
CENTER OF A RR RAIL FCP	SE	19.48' ✓
SET NAIL IN BOTTLE CAP IN NW FACE OF NIPSCO POWER POLE G35/046	SW	15.77' ✓

6/13/18 DEM FD BRONZE MONUMENT

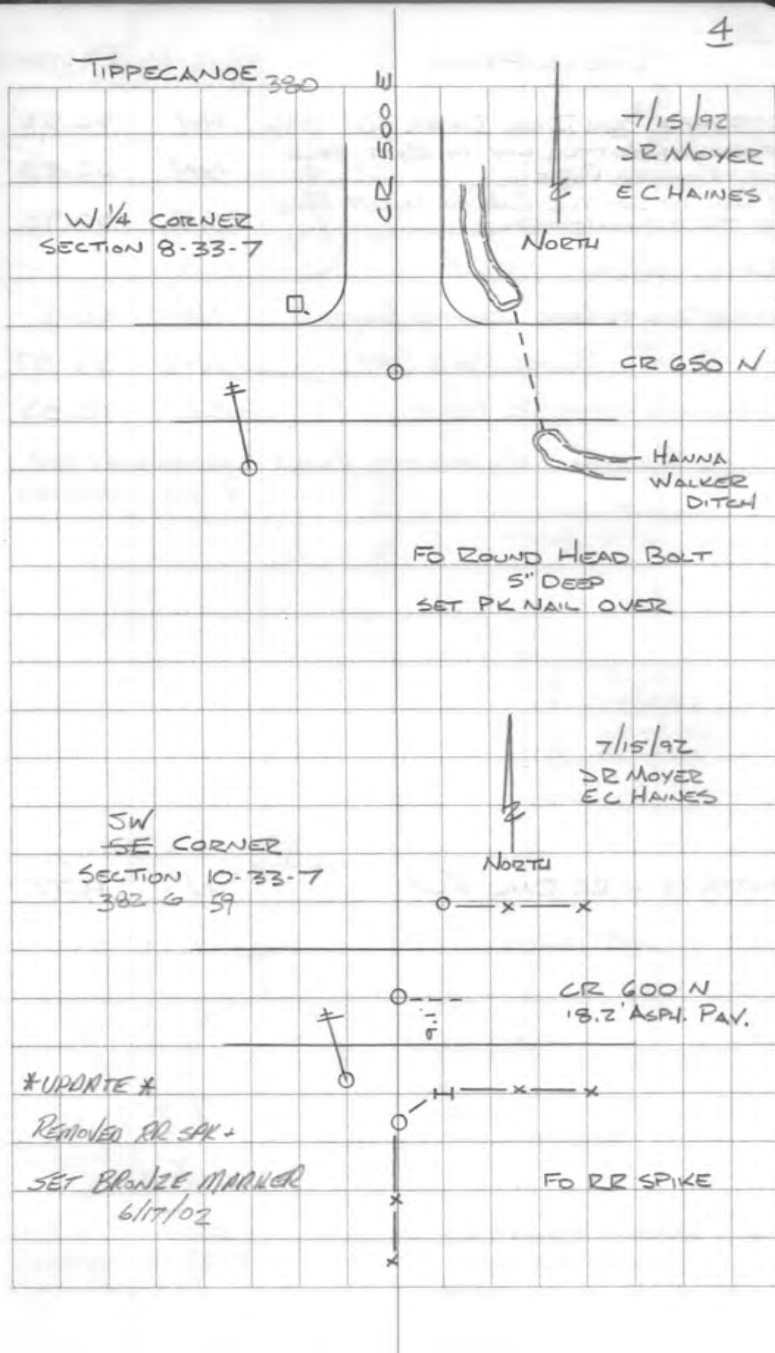

DESCRIPTION

BEARING DISTANCE

CENTER OF A RR RAIL FCP S 20.35'
 SET NAIL IN BOTTLE CAP IN SE FACE OF A POWER POLE NE 25.14'

CENTER OF RR RAIL FCP TO CENTER OF RR RAIL FCP 41.35'


7/6/18 JRM - FO RR SPIKE 1" DEEP

1/2" x 24" REBAR W/CAP 11' TO E/P SE 25.40'

1/2" x 24" REBAR W/CAP 9' TO E/P SW 27.83'

E RR RAIL FCP LEANING S 20.05'

WASHINGTON

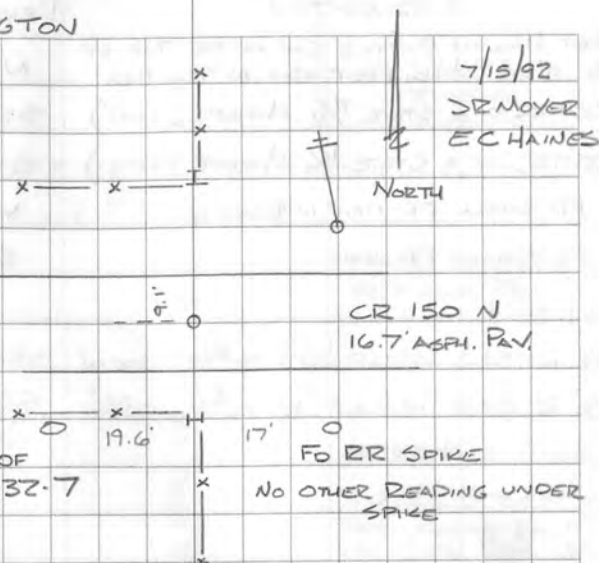


DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN THE TOP OF A 8" DIA WOOD POST NEXT TO TEL. BOX	NW	51.37'
CENTER OF A STATE P/W MARKER (CONC)	SSE	77.70'
CENTER OF A STATE P/W MARKER (CONC)	SW	50.95'
FD SMALL PK NAIL IN ROAD C	W	4.0'
FD SMALL PK NAIL	S	4.0'

3/23/17

1/2" REBAR W/CAP 17' TO E/P 1200 W	SSW	55.30'
1/2" REBAR W/CAP 13' TO E/P 1200 W	SE	40.95'

SET 1/2" x 30" REBAR W/CAP 10.2' TO E/P 8" DEEP	NW	22.44'
CENTER OF A 3" DIA STEEL FCP	E	19.77'
CUT OFF RR RAIL FCP 6" DEEP	W	19.75'
6/25/18 JRM - FD RR SPIKE 3" DEEP		

FRANKLIN

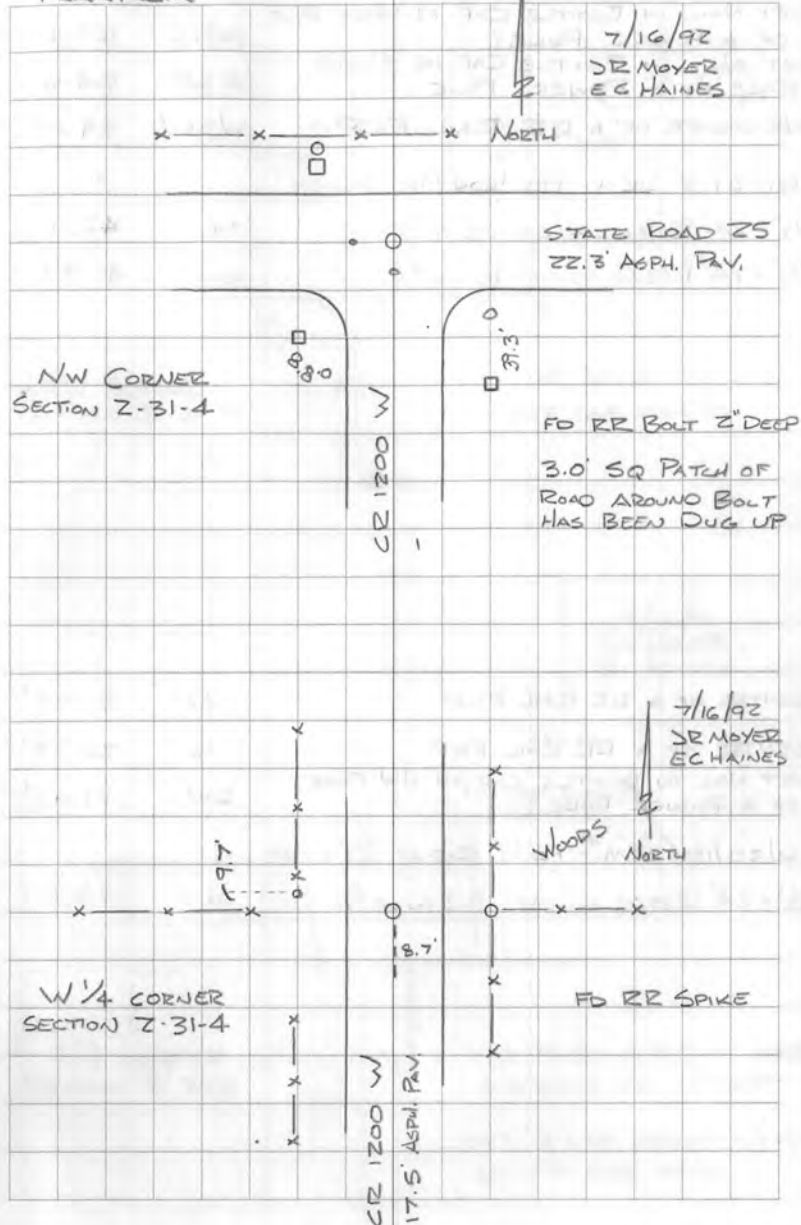

DESCRIPTION

BEARING DISTANCE

2 SET NAIL IN BOTTLE CAP IN WEST FACE OF A POWER POLE	NNE	67.40'
1 SET NAIL IN BOTTLE CAP IN NORTH FACE OF A POWER POLE	ESE	54.52'
C NE CORNER OF A RR RAIL FCP	WSW	39.02'

6/25/18 SRM - FO IRON PIPE FLUSH

1/2" x 24" REBAR W/CAP 8' TO E/P NE 42.71'

1/2" x 24" REBAR W/CAP 10' TO E/P NW 42.33'

CENTER OF A RR RAIL FCP N 20.25'

CENTER OF A RR RAIL FCP S 20.35'


SET NAIL IN BOTTLE CAP IN NW FACE OF A POWER POLE SW 31.43'

6/25/18 SRM - FO 1/2" REBAR 3" DEEP

1/2" x 24" REBAR W/CAP 9.3' N OF E/P NW 36.56'

FRANKLIN

8

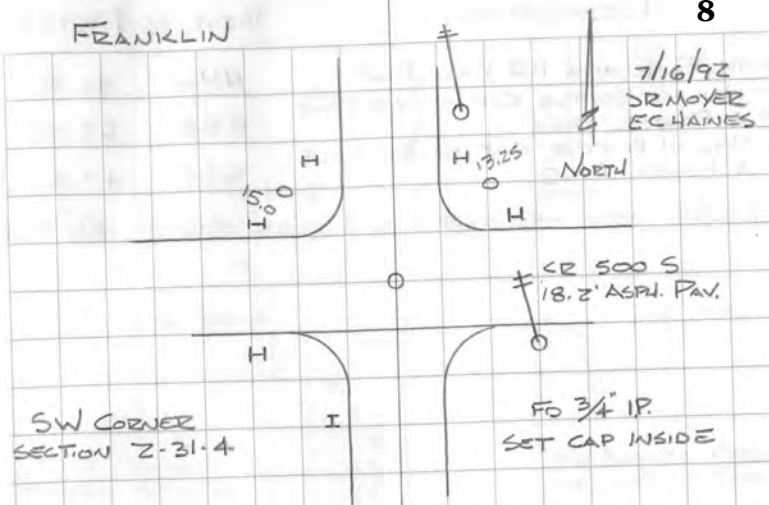SW CORNER
SECTION 2-31-4FO 3/4" IP.
SET CAP INSIDE7/16/92
SR MOYER
EC HAINES

NORTH

115" CAP SURFACE
CULVERT

CR 500 S

S 1/4 CORNER
SECTION 3-31-4FO PK NAIL 0.15' EAST OVER
A 6" SPIKE NAIL 4" DEEP
SET 1/2" x 30" REBAR W/CAP
SET PK NAIL OVER

DESCRIPTION

BEARING

DISTANCE


DESCRIPTION	BEARING	DISTANCE
SOUTH FACE OF A RR RAIL FCP	NNW	46.00' ✓
SET NAIL IN BOTTLE CAP IN NW FACE OF A POWER POLE	ESE	63.35' ✓
SET NAIL IN BOTTLE CAP IN SW FACE OF A POWER POLE	SSE	47.35' ✓

6/20/18 SRM - FO SHAFT OF BRONZE MARKER 5 1/2" DEEP

DESCRIPTION	BEARING	DISTANCE
CENTER OF A RR RAIL FCP	E	16.15'
SET NAIL IN BOTTLE CAP IN SW FACE OF A POWER POLE	SSE	41.57'

6/20/18 SRM FO RR SPIKE 3" DEEP

FRANKLIN EA

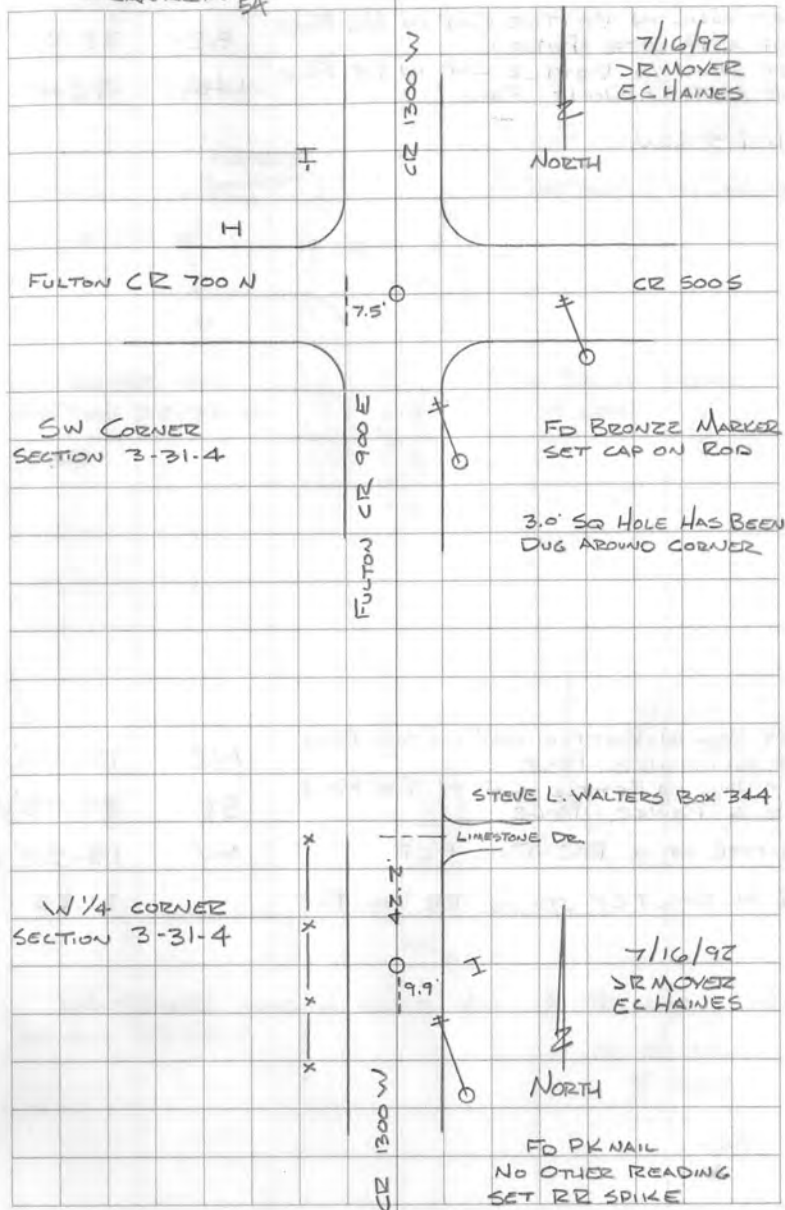


DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	SE	23.25'
SET NAIL IN BOTTLE CAP IN SE FACE OF A TELEPHONE POLE	WSW	72.10'
1/17/17 SRM		
SET 1/2" x 18" REBAR W/CAP	NW	31.05'

SET NAIL IN BOTTLE CAP IN NW FACE OF A POWER POLE	NE	20.33'
SET NAIL IN BOTTLE CAP IN SW FACE OF A POWER POLE	SE	24.93'
CENTER OF A RR RAIL FCP	W	15.50'
E RR RAIL FCP TO E RR RAIL FCP		31.25'


1/17/17 SRM FOR ALL WITNESSES IN GOOD CONDITION

PRAIRIE

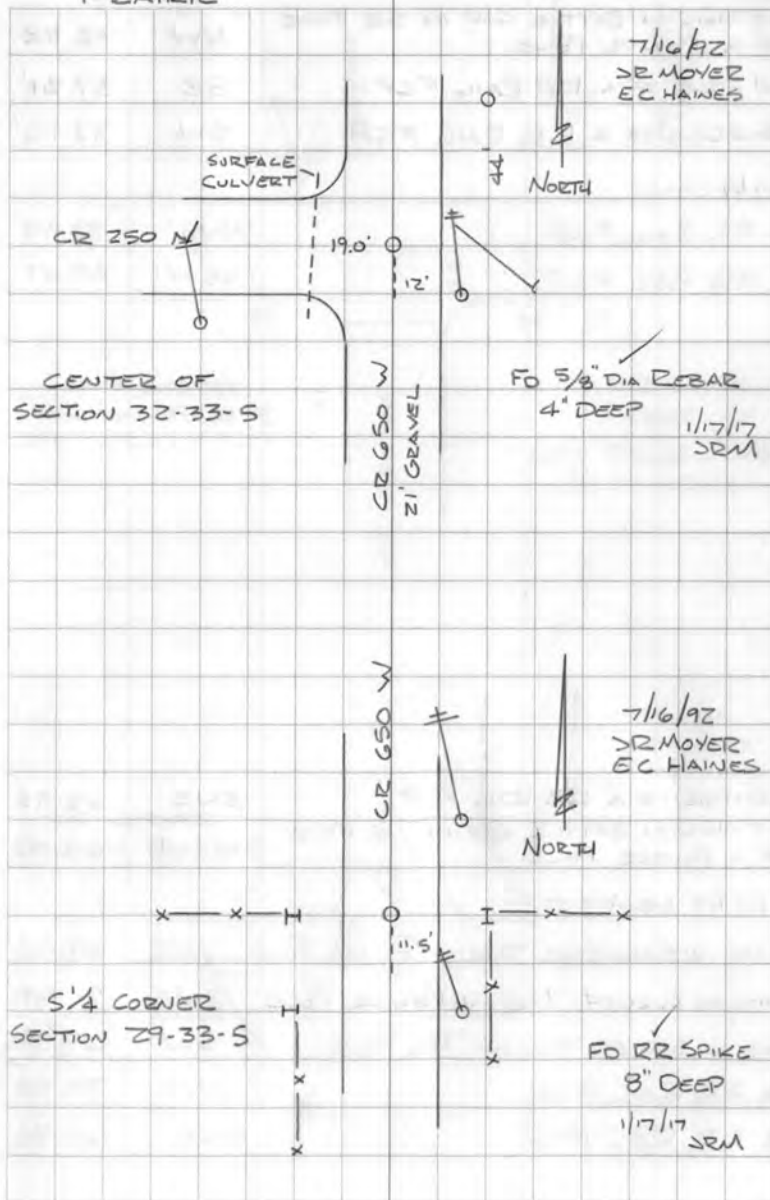

	DESCRIPTION	BEARING	DISTANCE
	SET NAIL IN BOTTLE CAP IN SE FACE OF A POWER POLE	NW	32.02'
	NW EDGE OF A RR RAIL FCP	SE	37.81'
	NE EDGE OF A RR RAIL FCP	SW	37.12'
	1/17/17 SRM		
	E RR RAIL FCP	NNW	27.40'
	E RR RAIL FCP	SSW	42.47'
	CENTER OF A RR RAIL FCP	ENE	65.95'
	SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	WSW	68.75'
	1/17/17 SRM		
	NAIL IN SURVEYOR TAG IN Power Pole	NNE	89.42'
	NAIL IN SURVEY TAG IN POWER POLE	ENE	72.65'
	NAIL IN SURVEY TAG IN TEL POLE	SW	68.56'
	E RR RAIL FCP	NW	70.53'
	E RR RAIL FCP	ENE	65.85'

PRAIRIE

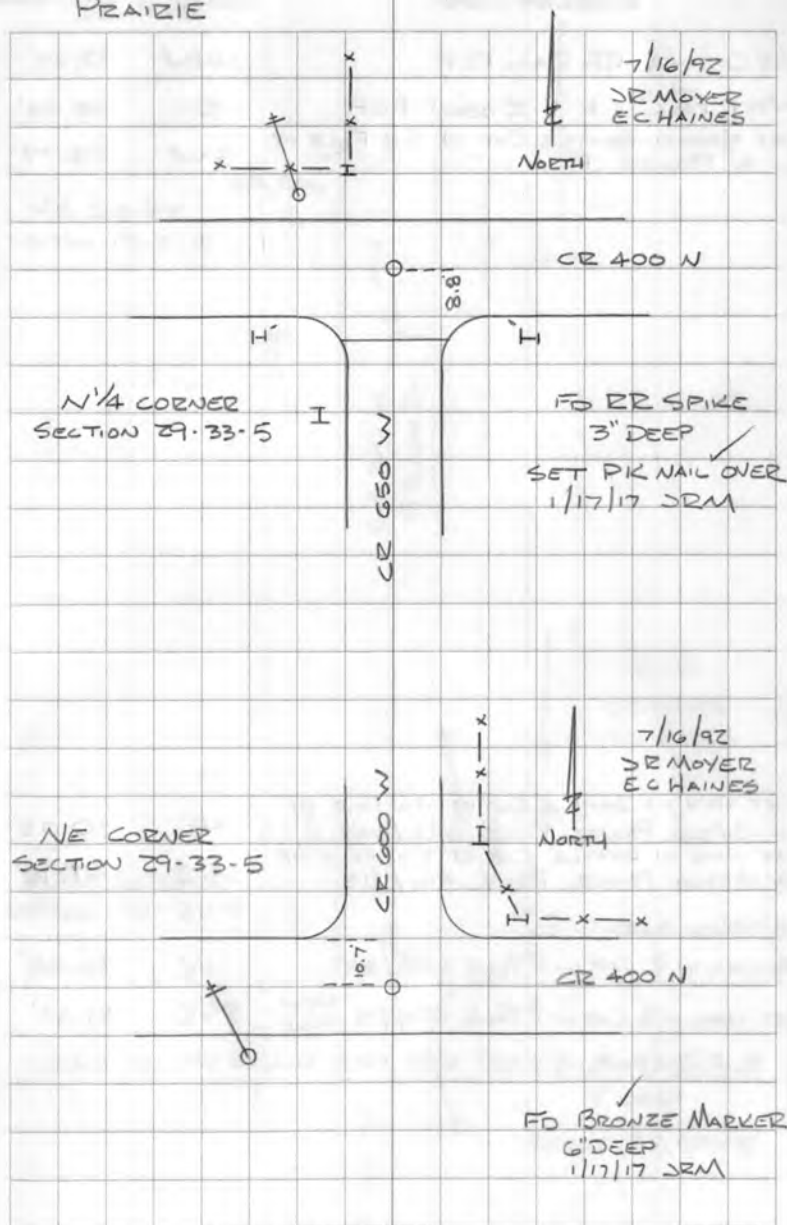

DESCRIPTION

BEARING DISTANCE

SE CORNER RR RAIL FCP	NNW	32.30'
WEST FACE OF A 4" I BEAM FCP	E	20.00'
SET NAIL IN BOTTLE CAP IN SE FACE OF A POWER POLE	SW	25.77'

SET NAIL IN BOTTLE CAP IN NW FACE OF A NIPSCO POWER POLE 638/047	NE	30.03'
SET NAIL IN BOTTLE CAP IN SW FACE OF A NIPSCO POWER POLE 620/215	SSE	67.90'

8/23/16 SRM

FO NAIL IN B. CAP IN P. POLE 638/047	NE	30.08'
SET NAIL IN B. CAP IN P. POLE 620/215 ^{NEW} POLE	SSE	61.43'
FO RR SPIKE 4" DEEP, SET MAG NAIL IN WASHER OVER		

SEWARD

W 1/4 CORNER
SECTION 15-31-5RR RAIL
I

25.5'

10.6'

CR 700 W
19.8' ASPH R.V.

NORTH

FO RR SPIKE

7/21/92
DR MOYER
EC HAINESNW CORNER
SECTION 10-31-5

19.3'

10.7'

CR 700 W

NORTH

7/21/92
DR MOYER
EC HAINES

CR 500 S


FO 1/2" x 3" BOLT
3" DEEP
RESET RR SPIKE

DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN NW FACE OF A NIPSCO POWER POLE 637/819	NNE	47.17'
SET NAIL IN BOTTLE CAP IN SW FACE OF A NIPSCO POWER POLE 621/869	ENE	47.37'
NW CORNER OF A RR RAIL FCP	SSE	46.41'
8/27/18 SEM		46.51'
1/2" x 24" REBAR w/CAP	SE	45.20'

SET A NAIL IN BOTTLE CAP IN THE NE FACE OF A POWER POLE	NNW	28.00'
NW CORNER OF A 4" CHANNEL IRON FCP	ESE	59.42'
NE CORNER OF A RR RAIL FCP	SSW	74.60'
7/30/18 SEM SET MAG NAIL w/TAG OVER MONUMENT		
1/2" x 24" REBAR w/CAP	SSE	53.68'
1/2" x 24" REBAR w/CAP 4.5' S of E/P	ESE	58.42'

SEWARD

NE CORNER
SECTION 10-31-5

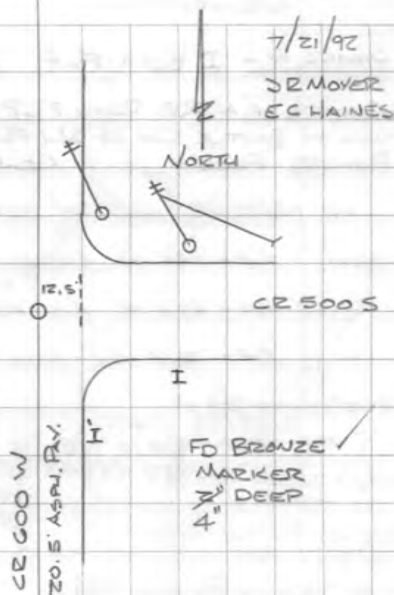


MONROE

NW CORNER
SECTION 4-31-7

FD BRONZE MARKER
SET CAP ON IT & A
PK OVER IT

FD A PK NAIL 0.16' NORTH

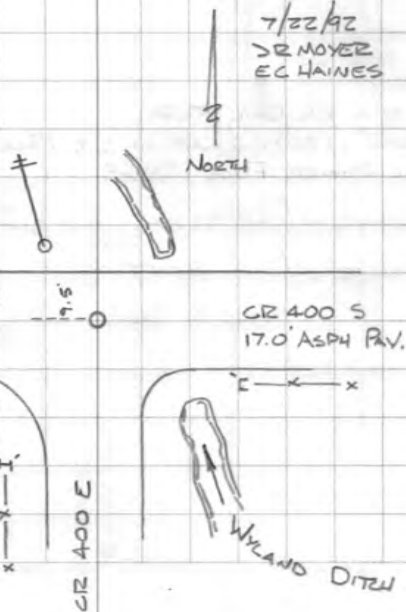

DESCRIPTION

BEARING

DISTANCE

SW CORNER OF A I BEAM FCP	NNE	84.13' ✓
SW CORNER OF A RR RAIL FCP	ENE	82.32'
SET NAIL IN BOTTLE CAP IN NW FACE OF A POWER POLE	SSW	66.16'

OK 5/25/06 HARRISON SET (1906 NICKEL 0.38' WEST)

OLD TIES: RIP - 842' NE E.S.D. RD ✓

RIP - 82.4' NE N.S.D. RD

RIP - 76.8' NW HOUSE SE COR

5/25/06 TIES:

- RIP 84.17' NE ✓

- 1/2" CAPPED REBAR 52.91' NW NOT FO

- " " " 43.88' SW FO 1/23/17 ✓

- " " " 51.41' SE NOT FO

1/23/17

NAIL IN TAG IN POWER POLE SSW 63.47'

1/2" x 18" REBAR W/CAP NE 68.60

CENTER OF A RR RAIL FCP E 24.00' ✓

SET A NAIL IN BOTTLE CAP IN SE FACE
OF REMC POWER POLE 2855 SE 27.68' ✓

FO 1/2" REBAR W/CAP FLUSH NW 25.97' ✓

FO 1/2" REBAR W/CAP BENT SW 35.4'

7/16/18 JEM

MONROE

W 1/4 CORNER
SECTION 4-31-7

CR 450 S

1/23/17 FO HARRISON

CR 400 E

FO RR SPIKE (TOP BENT)

REPLACED WITH A
1/2" x 30" REBAR W/CAP
2" DEEP

HARRISON SET 5/25/06
TJK

W 1/4 CORNER
SECTION 9-31-7

LIMESTONE DR.

HEDGE ROW

LIMESTONE DR.

THE ORLANDS
5537 S 400 E

CR 400 E
18' ASPH PAV.

7/22/92
DR MOYER
EC HAINES

NORTH


WOODS

FO RR SPIKE

	DESCRIPTION	BEARING	DISTANCE
FO NIP	SET NAIL IN BOTTLE CAP IN SE FACE OF A POWER POLE	ENE	18.23'
CO	CENTER OF A RR RAIL FCP	W	20.00'
FO NIP	7/17/17		
NIP	1/2" X 16" REBAR W/CAP 7' TO E/P	SW	32.50'
SW	NAIL IN B. CAP POWER POLE	SE	44.60'
1/2	SET MAG NAIL W/CO TAG OVER SPIKE		

SET NIP	SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	NNW	46.64'
SET NIP	SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	ESE	69.56'
SET OF	SET NAIL IN BOTTLE CAP IN SE FACE OF A POWER POLE	SSW	59.63'
	1/23/17 ALL GONE		

6/	OLD TIE: SPR POLE - 69.2' SE		
PO	SPR POST - 38.4' SW		
	1/23/17 SPR POLE - 46.5' NW		
	NAIL IN TAG IN POWER POLE	NNW	68.77'
	1/2" REBAR W/CAP	NE	51.19'
	NAIL IN TAG IN POWER POLE	SE	71.98'
	1/2" REBAR W/CAP	SW	46.53'

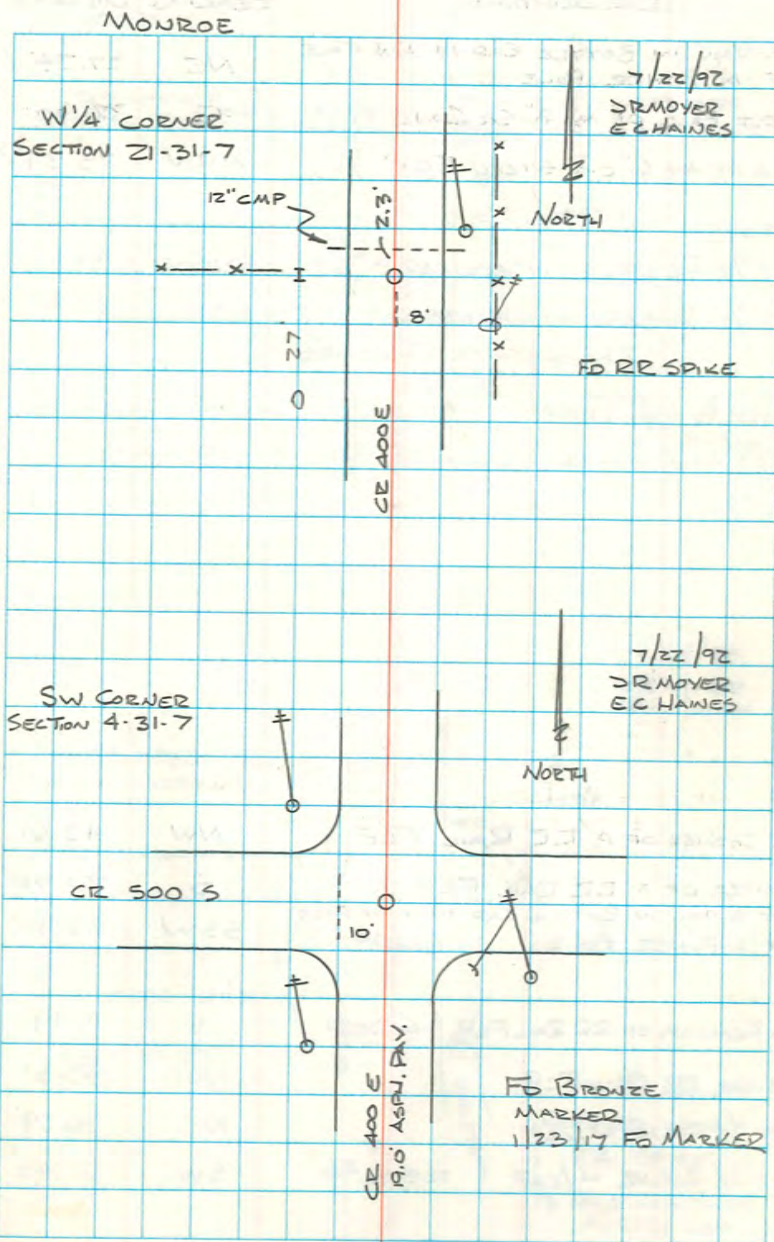

DESCRIPTION

BEARING DISTANCE

DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN SW FACE IN NIPSCO POWER POLE 535/299	NNW	20.71'
SET NAIL IN BOTTLE CAP IN NW FACE IN NIPSCO POWER POLE 669/765	ESE	26.51'

DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN SW FACE IN NIPSCO POWER POLE 1057/276	NW	33.62'
FACE OF A 4" DIA STEEL FCP	NE	36.6'
SET NAIL IN BOTTLE CAP IN NORTH FACE OF NIPSCO POWER POLE 1051/328	ESE	80.63'

VAN BUREN

CENTER OF
SECTION 9-34-6CR 1250 N
20.7 ASPH. PAV.1/2 STORY
FRAME
HSE.

NORTH

7/24/92
SR MOYER
EC HAINESFD RR SPIKE 3" DEEP
SET PK NAIL OVERW 1/4 CORNER
SECTION 9-34-6SYRACUSE ST.
28.1 B/C - B/C


RAILROAD

FD PK CENTERED
BETWEEN RAILS7/24/92
SR MOYER
EC HAINES

NORTH

2" CONC CURB & GUTTER


	DESCRIPTION	BEARING	DISTANCE
FO N NIPS	SOUTH FACE OF A 4" DIA CONC FILLED I.P.	N	18.28' ✓
CEN	NORTH FACE OF A RR RAIL FCP	S	23.10' ✓
FO N NIPS	9/12/17 UPDATED SRM		
SW	4 3" DIA STEEL CHAIN LINK FENCE POST	S	26.00'
1/2	1/2" x 16" REBAR W/CAP 7.7' TO E/P	NW	33.16'
"	6/1/21 SRM MWH		
"	1/2" x 24" REBAR W/CAP 7.3' TO E/P	SW	37.00'
SET NAIL	SET NAIL IN BOTTLE CAP IN SOUTH FACE OF A TELEPHONE POLE	NNW	25.53' 25.40'
SET NAIL	WEST END OF A CONC BRIDGE DECK	E	32.25' ✓
SET OFF	SET NAIL IN BOTTLE CAP IN THE TOP OF A 6" SQ WOOD FCP	S	30.33' 30.50'
8/14/17 SRM			
G	MAG NAIL IN CO TAG IN CONC HEADWALL	SE	35.71'
F	MAG NAIL IN CO TAG IN CONC HEADWALL	NE	34.83'

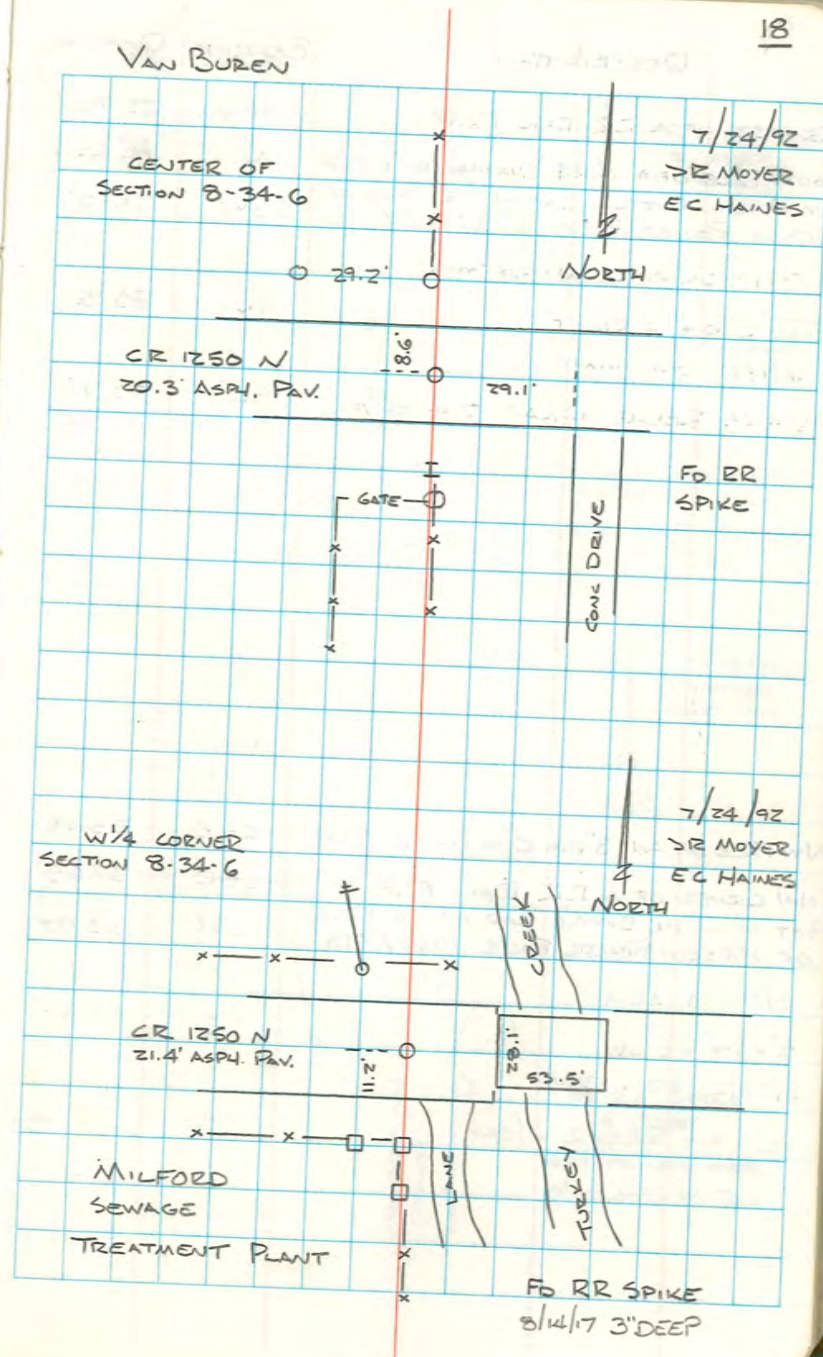


	DESCRIPTION	BEARING	DISTANCE
FO N NIPS	CENTER OF A RR RAIL FCP	NW	23.70' ✓
CEN	SOUTH FACE OF A 6" x 4" CHANNEL IRON FCP	N	19.80' ✓
FO N NIPS	SET NAIL IN BOTTLE CAP IN SE FACE OF NIPSCO POWER POLE 678/937	SSW	21.10' ✓
SW	7/2/19 SR MOVER MWHUFFMAN		
1/2"	FACE 5" DIA STEEL FCP	N	23.80'
"	6/1/21 SRM MWH		
"	1/2" x 24" REBAR W/CAP 2.4' TO E/P	SE	23.78'
SET NIP SET NIP SET OF	NW FACE OF AN 8" DIA CONC FILLED FCP	ESE	25.12'
	NW CORNER OF A RR RAIL FCP	SSE	37.65'
	SET NAIL IN BOTTLE CAP IN SE FACE OF NIPSCO POWER POLE 1056/798	SW	32.67' 33.00'
	3/25/19 SRM		
6/	1/2" x 24" REBAR	SE	37.41'
P	5/25/21 SRM MWH		
	1/2" x 24" REBAR W/CAP	NE	38.60'

VAN BUREN


19

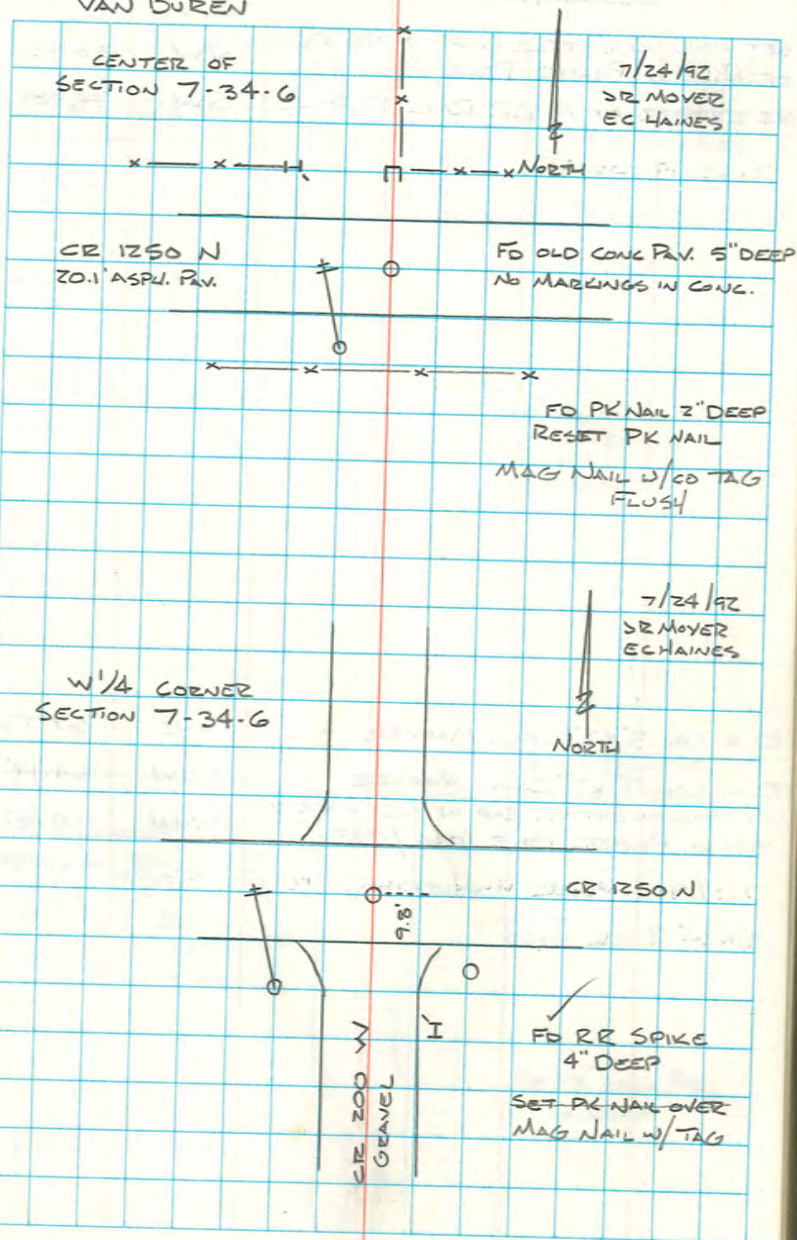

DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN OF NIPSCO POWER POLE	NE FACE	NW 25.85'
NE CORNER OF A RR RAIL	FLP	SW 28.29'
ELK. CO. 3"x3" CONC. MARKER	NNE	67.73'
ELK. CO. 3"x3" CONC. MARKER	NNW	64.14'
SET NAIL IN BOTTLE CAP IN NE FACE OF NIPSCO POWER POLE 1036 / 765	WNW	20.87'

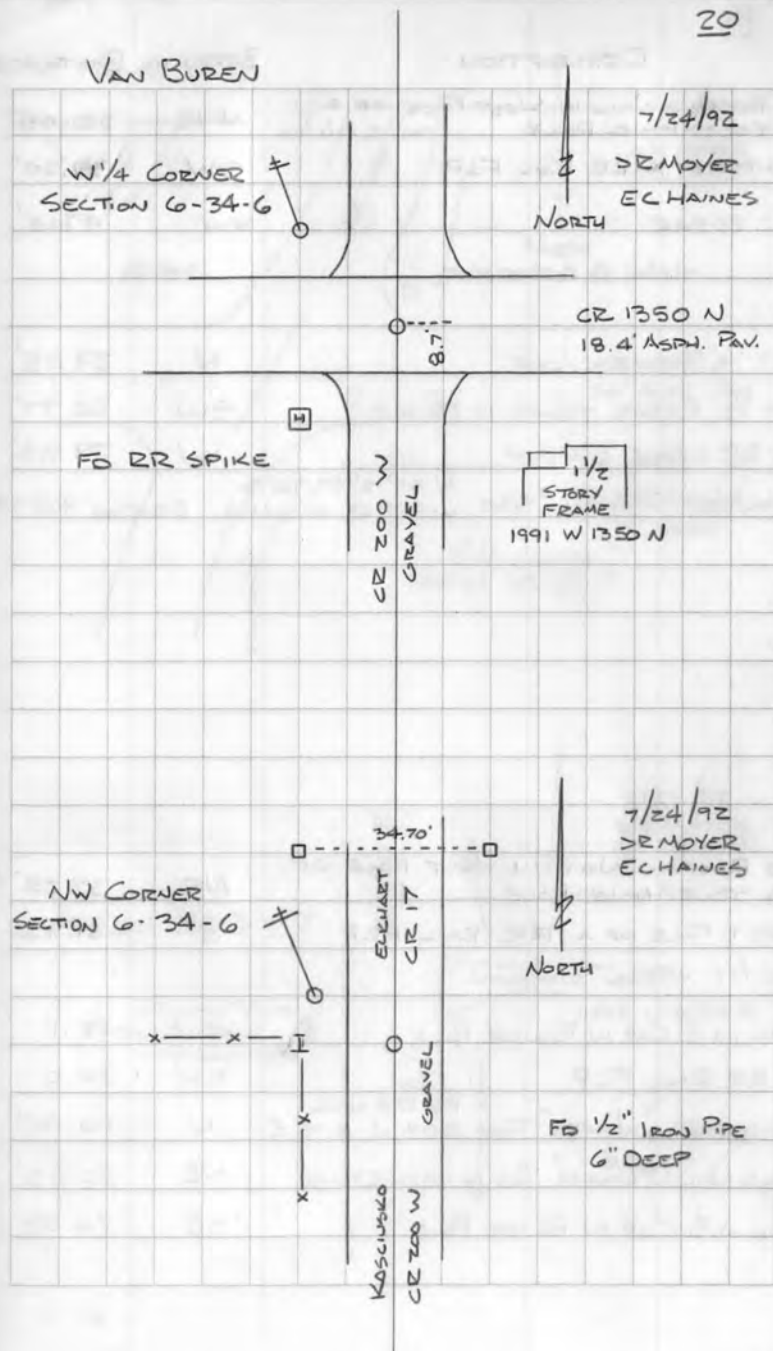


DESCRIPTION	BEARING	DISTANCE
FO ROOFING NAIL IN WEST FACE OF A TELEPHONE POLE GONE 6/1/16	NNE	30.45'
CENTER OF A RR RAIL FCP	SW	39.30'
1/2" RE-BAR	NW	97.65'
318/02 RE REFERENCED		
6/1/16		
SET 1/2" REBAR W/CAP	N	29.05'
SET 1/2" REBAR W/CAP IN FENCE	SW	30.77'
FO RR SAIKE 3" DEEP	W	79.85'
WOOLPERT STATION #830	N 41°15' 52.91698 W 85°43' 06.64134	ELEVATION 907.974
FO ROOFING NAIL IN WEST FACE OF A TELEPHONE POLE	NE	37.25' ✓
WEST FACE OF A RR RAIL FCP	E	21.42'
6/1/17 JEM		
NAIL IN B. CAP IN POWER POLE	NW	22.11'
E RR RAIL FCP	NW	24.0'
MAG NAIL IN "WALKER" TAG 0.08' N, 0.15' E	N	16.40'
MAG NAIL IN "WALKER" TAG IN ASPH ORNE	NE	30.03'
NAIL IN B. CAP IN POWER POLE	SE	26.08'

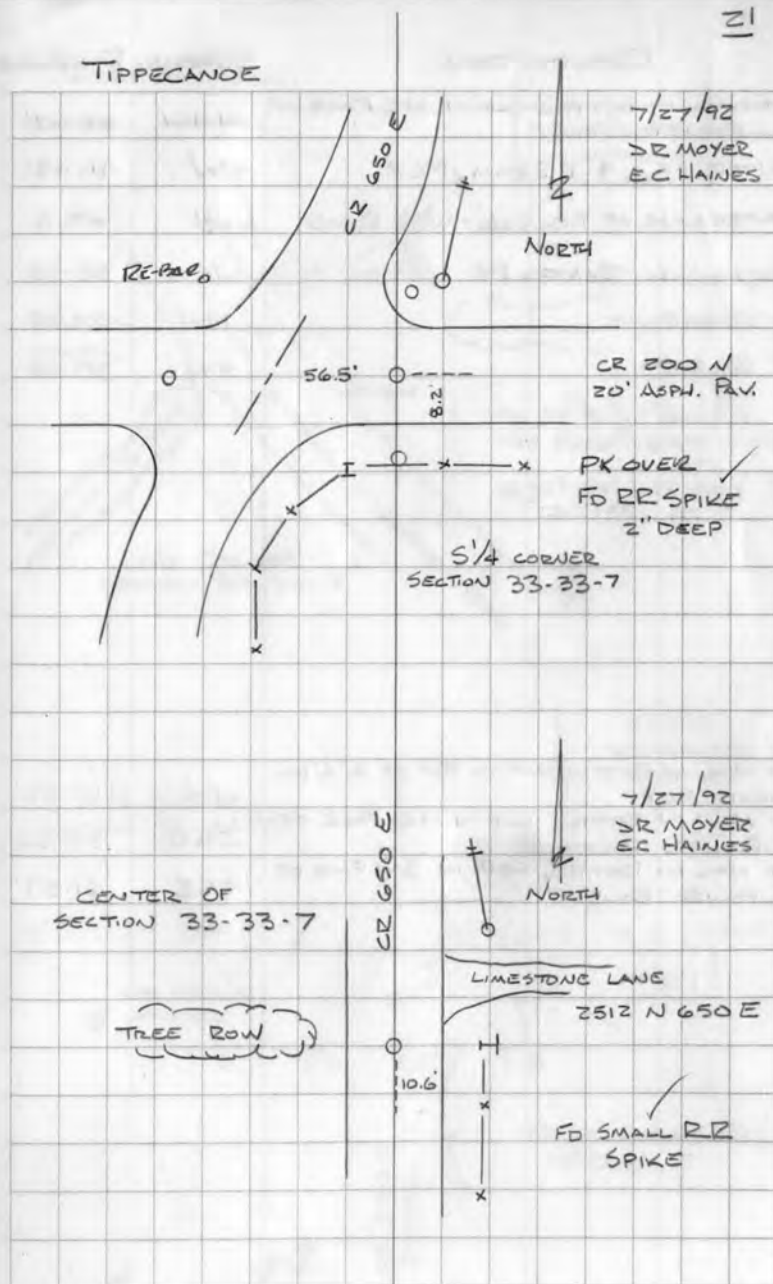

	DESCRIPTION	BEARING	DISTANCE
FO N NIPSE	SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	WNW	57.47'
CENT	CENTER OF A 4" I BEAM FCP	W	41.48' ✓
FO N NIPSE	CENTER LINE OF THE SYR. - WEB ROAD	W	62.5'
SW	MAG NAIL IN TREATED PP	W/SW	38.58'
1/2"	1/2" RE-BAR	NW	27.58
"	1/2" RE-BAR	SW	27.94
"	FO 7/23/19 REMOVED		
"	6/8/21 SEM MWH		
	FO MAG NAIL NO TAG IN RO ♀	W	63.1'

	SET NAIL IN BOTTLE CAP IN TOP OF A 6" DIA WOOD FCP	N	12.83' ✓
SET	SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	ESE	35.50' ✓
SET NIP SET NIP SET OF	SET NAIL IN BOTTLE CAP IN SW FACE OF A POWER POLE	SSE	61.37' 61.43'
	FO 7/23/19 REMOVED		
	6/8/21 SEM MWH		
6/	1/2" x 24" REBAR W/ CAP 8.6' TO E/P	NW	21.63'

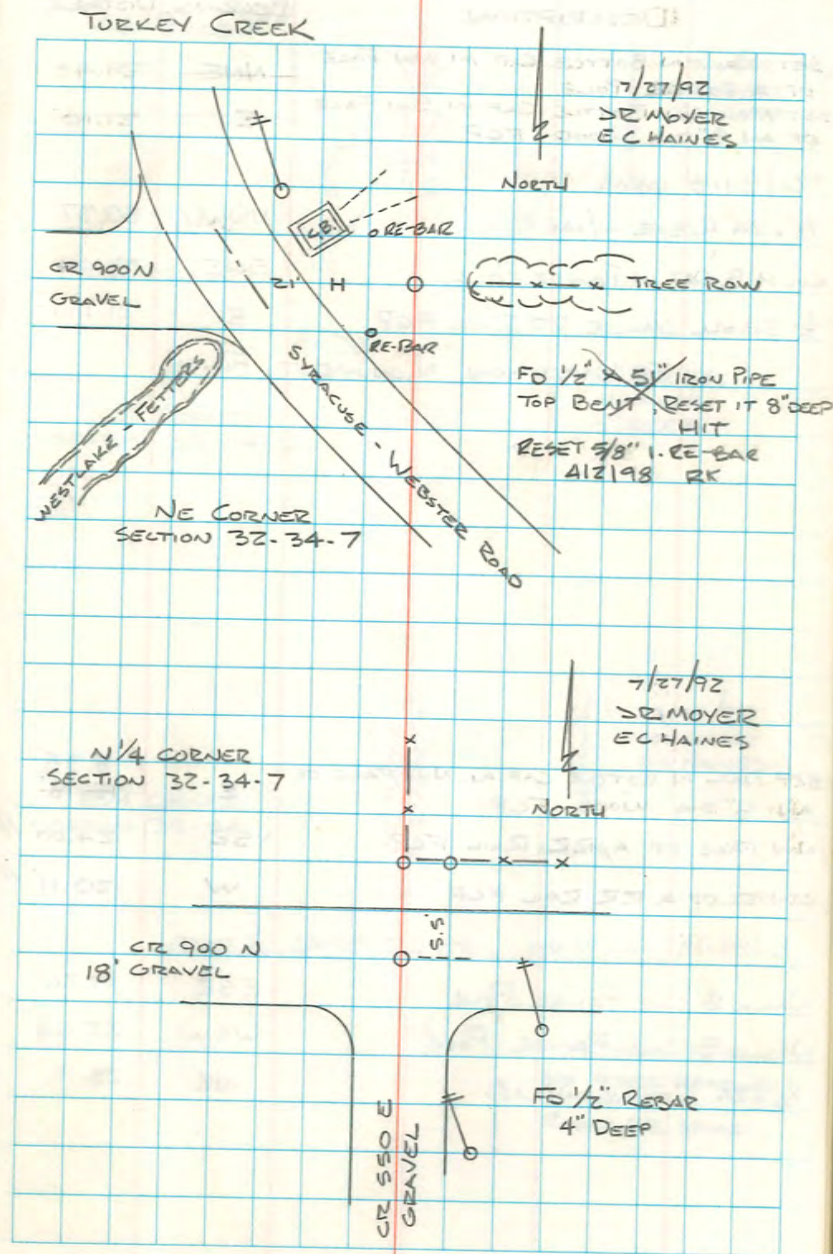

DESCRIPTION

BEARING DISTANCE

SET NAIL IN BOTTLE CAP IN NW FACE OF A POWER POLE	NNE	29.40'
SET NAIL IN BOTTLE CAP IN SW FACE OF AN 8" DIA WOOD FCP	E	21.10'

6/5/18 JEM

1/2" x 24" REBAR W/CAP	NNW	80.37'
------------------------	-----	--------

NAIL IN B. CAP IN POWER POLE	ENE	28.04'
------------------------------	-----	--------

1/2" SMALL GAUGE RR RAIL FCP	E	21.1'
------------------------------	---	-------

FO HARRISON MONUMENT FLUSH



SET NAIL IN BOTTLE CAP IN NW FACE OF AN 8" DIA WOOD FCP	E	18.18'
---	---	--------

NW FACE OF A RR RAIL FCP	SE	24.00'
--------------------------	----	--------

CENTER OF A RR RAIL FCP	W	20.11'
-------------------------	---	--------

479 C

VAN BUREN

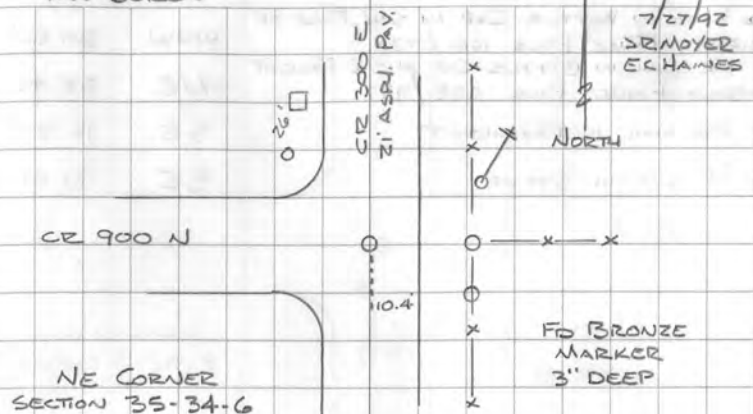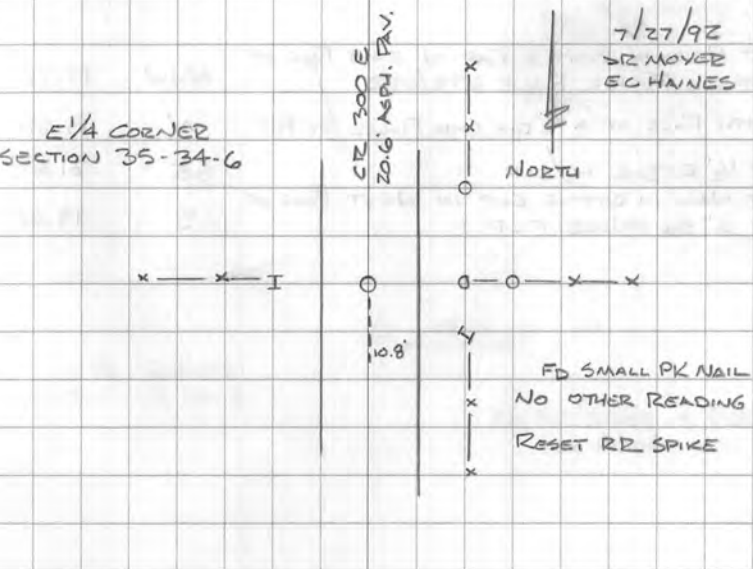
7/27/92
DR MOVED
EC HANNES7/27/92
DR MOVED
EC HANNES

DESCRIPTION	BEARING	DISTANCE
FO NAIL IN BOTTLE CAP IN SW FACE OF NIPSCO POWER POLE 1061/738	WNW	80.06'
FO PK NAIL IN BOTTLE CAP IN SE FACE OF NIPSCO POWER POLE 685/987	NE	28.45'
FO PK NAIL IN PAVEMENT	SE	16.27'
FO "+" CUT IN STONE	SE	31.51'


SET NAIL IN BOTTLE CAP IN EAST FACE OF NIPSCO POWER POLE 678/082	NNW	17.78'
SOUTH FACE OF A 3" DIA CONC FILLED ST FCP	N	19.65'
SET 1/2" REBAR W/CAP	SE	31.67'
SET NAIL IN BOTTLE CAP IN WEST FACE OF A 6" SQ WOOD FCP	S	19.60'

JEFFERSON

NW CORNER
SECTION 19-34-5

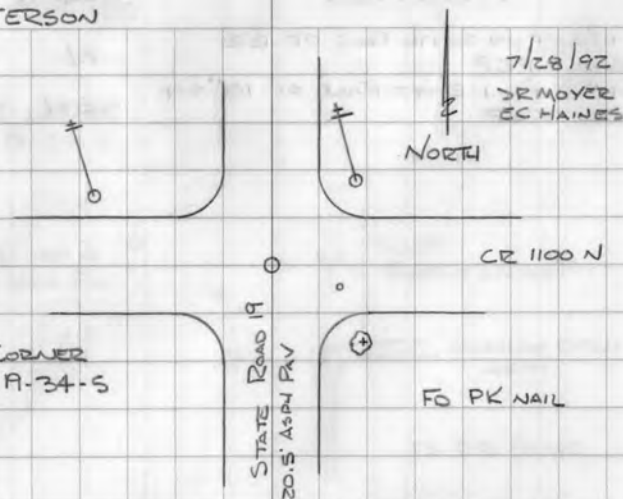


N 1/4 CORNER
SECTION 19-34-5

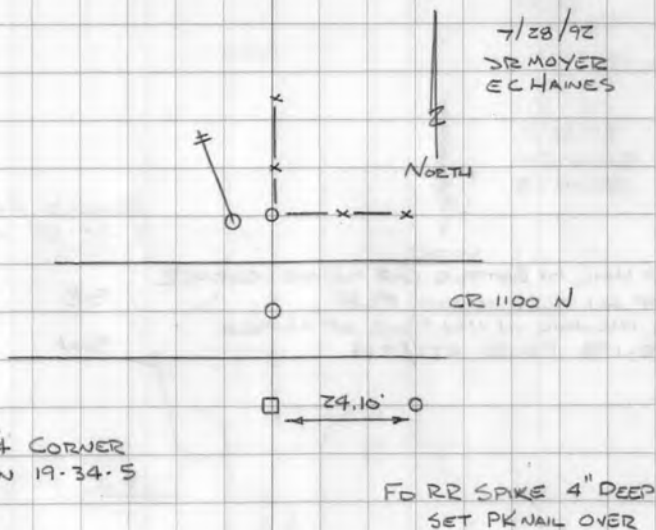

FO RR SPIKE 4" DEEP
SET PK NAIL OVER

DESCRIPTION	BEARING	DISTANCE
FO "+" CUT IN SOUTH FACE OF RR RAIL FCP	N	20.27'
FO "+" CUT IN EAST FACE OF 10" SQ CONC. FCP	SSW	21.04'

FO NAIL IN BOTTLE CAP IN NE CORNER OF AN OLD WOOD FCP	SE	29.88'
FO PK NAIL IN NW FACE OF NIPSCO POWER POLE 677/744	SW	26.77'

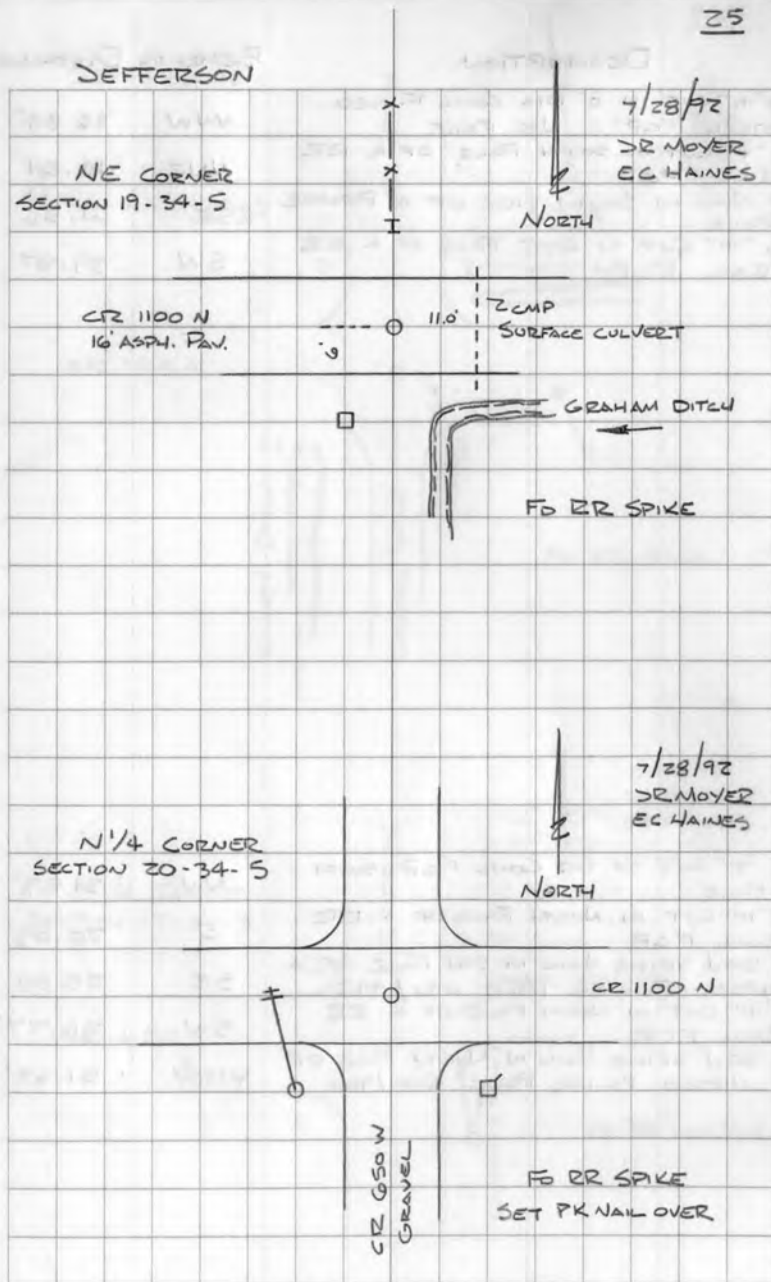

DESCRIPTION	BEARING	DISTANCE
FD "4" CUT IN 8" DIA CONG FILLED STEEL FCP NE FACE	NNW	36.54'
FD "4" CUT IN SOUTH FACE OF A RR RAIL FCP	NNE	40.24
FD NAIL IN SOUTH SIDE OF A POWER POLE	ESE	61.56'
FD "4" CUT IN EAST FACE OF A RR RAIL FCP	SW	39.87'

FD "4" CUT IN SQ CONG FCP SOUTH FACE	NW	31.83'
FD "4" CUT IN NORTH FACE OF A RR RAIL FCP	E	20.03'
FD 20d SPIKE NAIL IN SW FACE OF A NIPSCO POWER POLE 681/942	SE	25.00'
FD "4" CUT IN NORTH FACE OF A RR RAIL FCP	SW	26.77'
FD 20d SPIKE NAIL IN NORTH FACE OF A NIPSCO POWER POLE 688/900	WSW	51.62'

JEFFERSON

NE CORNER
SECTION 20-34-5

CR 1100 N

KINNEY DITCH

GRAVEL LAINE

8.4'

FO RR SPIKE

7/28/92

SR MOYER
EC HAINES

NORTH

E 1/4 CORNER
SECTION 17-34-5

CR 1150 N

CR 600 W

GRAVEL DRIVE

FO 3/4" IRON BAR

7/28/92


SR MOYER
EC HAINES

NORTH

DESCRIPTION	BEARING	DISTANCE
FD PK NAIL IN NORTH FACE OF A NIPSCO POWER POLE 624/318	ESE	101.10'
CENTER OF A STATE E/W MARKER	SSW	62.45' ✓
CENTER OF A STATE E/W MARKER LEAVING	WSW	60.17' ✓
10/18/17 SEM		
NAIL IN B. CAP NIPSCO P. POLE # 624/318	ESE	104.63'
NAIL IN B. CAP NIPSCO P. POLE 624/319	WSW	123.14'
NW CORNER RR RAIL FCP STATE HIGHWAY RAIL	SSW	62.36' ✓
SET MAG NAIL IN TAG 1.0' TO E/P	NW	25.06'

CENTER OF A RR RAIL FCP	NE	34.70' ✓
CENTER OF A 3"x6" I BEAM FCP	ESE	19.60' ✓
CENTER OF A RR RAIL FCP	W	20.31' ✓

FRANKLIN

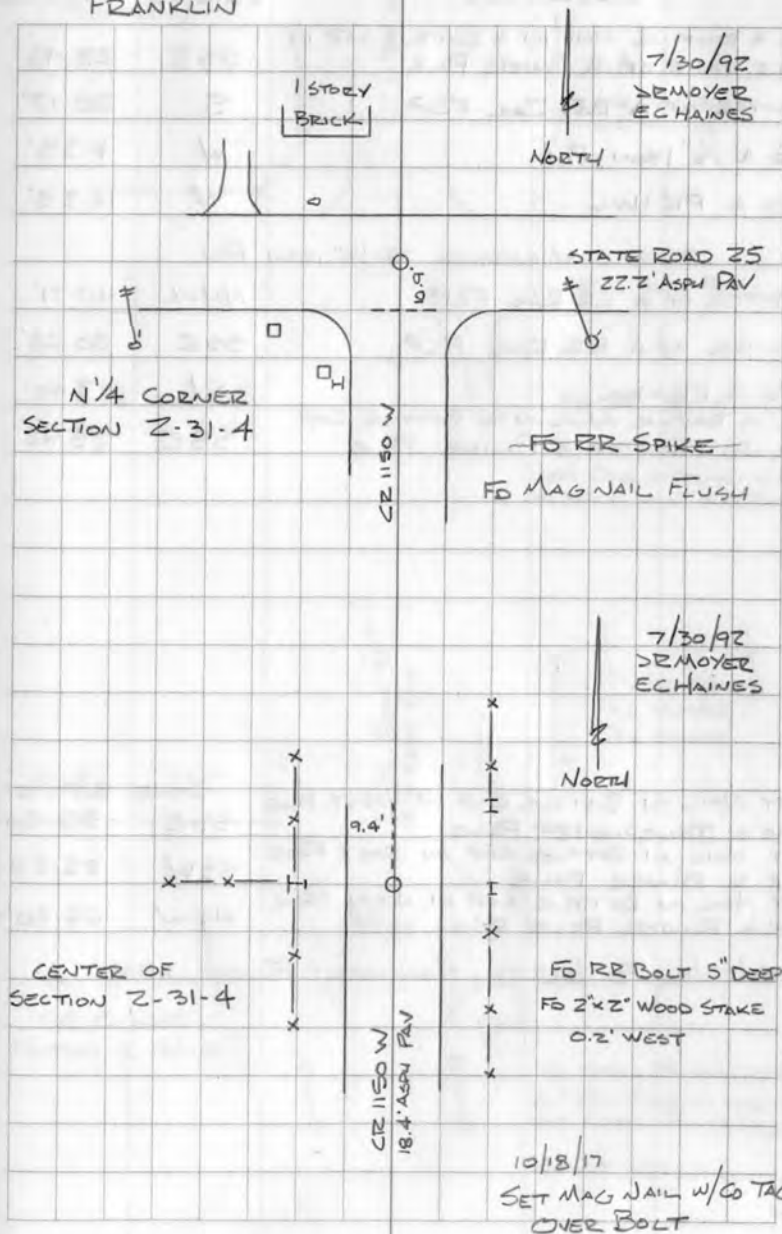


DESCRIPTION	BEARING	DISTANCE
FO A ROOFING NAIL IN A BOTTLE CAP IN NE FACE OF A POWER POLE	SSE	23.43'
CENTER OF A RR RAIL FCP	S	20.17'
FO A 1/2" IRON PIN	W	4.35'
FO A PK NAIL	W	11.35'

WITNESSES TO 1/2" IRON PIN

CENTER OF A RR RAIL FCP	NNW	40.71'
CENTER OF A RR RAIL FCP	SSE	20.28'
FO A PK NAIL	W	7.00'
FO A ROOFING NAIL IN A BOTTLE CAP IN NE FACE OF A POWER POLE	SSE	25.82'

SET NAIL IN BOTTLE CAP IN WEST FACE OF A TELEPHONE POLE	GONE	8/29/16
SET NAIL IN BOTTLE CAP IN EAST FACE OF A POWER POLE	SSE	55.50'
SET NAIL IN BOTTLE CAP IN NORTH FACE OF A POWER POLE	SSW	55.28'✓
SET NAIL IN BOTTLE CAP IN NORTH FACE OF A POWER POLE	WSW	66.80'✓


8/29/16 FO HARRISON MONUMENT FLUSH SRM

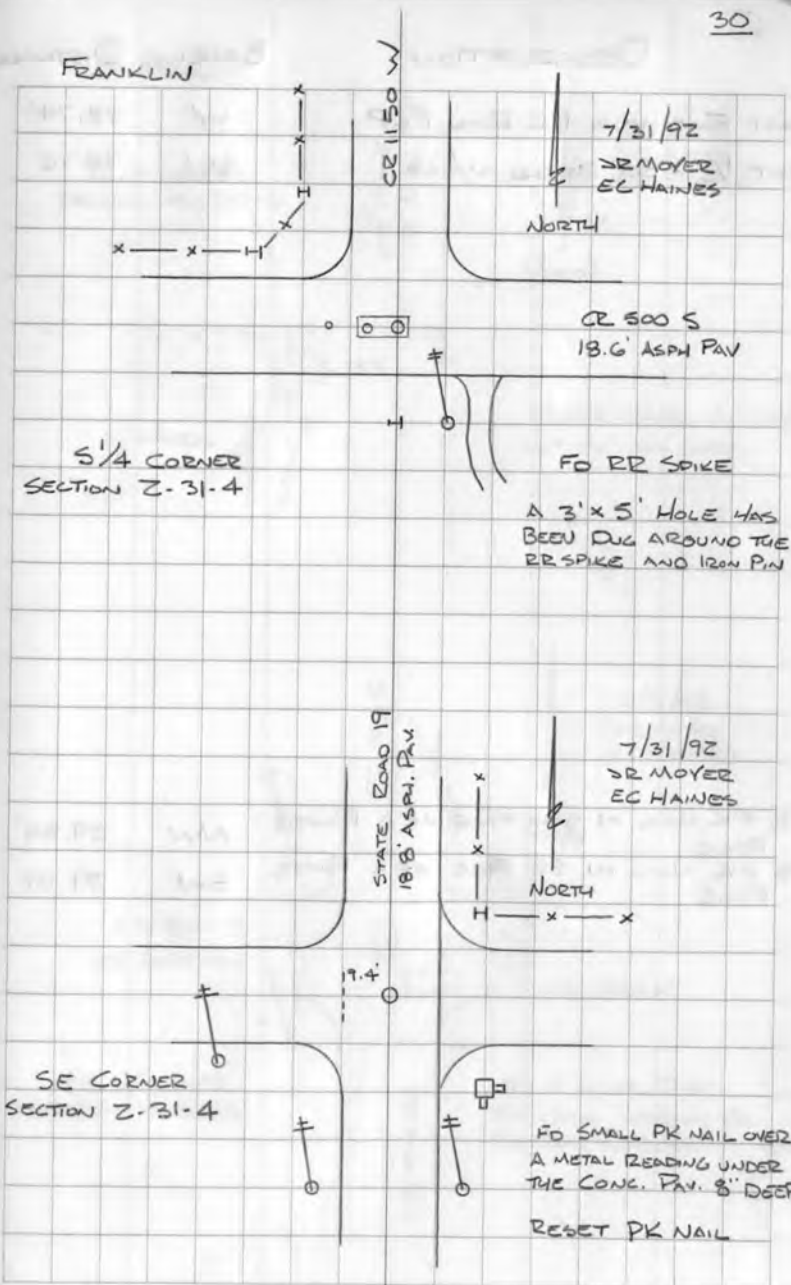

DESCRIPTION	BEARING	DISTANCE
EAST FACE OF A RR RAIL FCP	W	22.74'
SET 1/2" x 30" REBAR W/CAP	SW	30.76'

FD PK NAIL IN SW FACE OF A POWER POLE	NW	29.34'
FD PK NAIL IN SE FACE OF A POWER POLE	SW	29.89'

LAKE

E 1/4 CORNER
SECTION 14-30-6CR 100 E
18' ASPH. PAV.8/3/92
DR MOYER
EC HAINES

NORTH

FD RR SPIKE 4" DEEP
SET PK NAIL OVER

CR 100 E

8/3/92
DR MOYER
EC HAINES

NORTH

CR 1300 S
20' ASPH. PAV.

3' x 5' PATCH

CR 1500 N


SE CORNER
SECTION 14-30-6FD 3" ALUM. DISK
STAMPED "WABASH CO.
SECTION CORNER"

CR 100 W

DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN NE FACE OF REMC POWER POLE 0393	NNW	71.81'
SW CORNER OF A RR RAIL FCP	NE	60.18'
NW FACE OF A 5" x 10" I BEAM FCP	SE	53.65'
SET NAIL IN BOTTLE CAP IN EAST FACE OF REMC POWER POLE 0392	SSW	77.66'
SET NAIL IN BOTTLE CAP IN SOUTH FACE OF REMC POWER POLE 0391	WNW	73.56'

SET 1/2" x 30" REBAR N/CAP 6" DEEP	NW	27.25'
E OF A 11" DIA CONC FCP ^{DATED} AUG 4, 1910	W	20.42'
SET PK NAIL IN NORTH FACE OF REMC POWER POLE 0693	WSW	18.26'

SEWARD

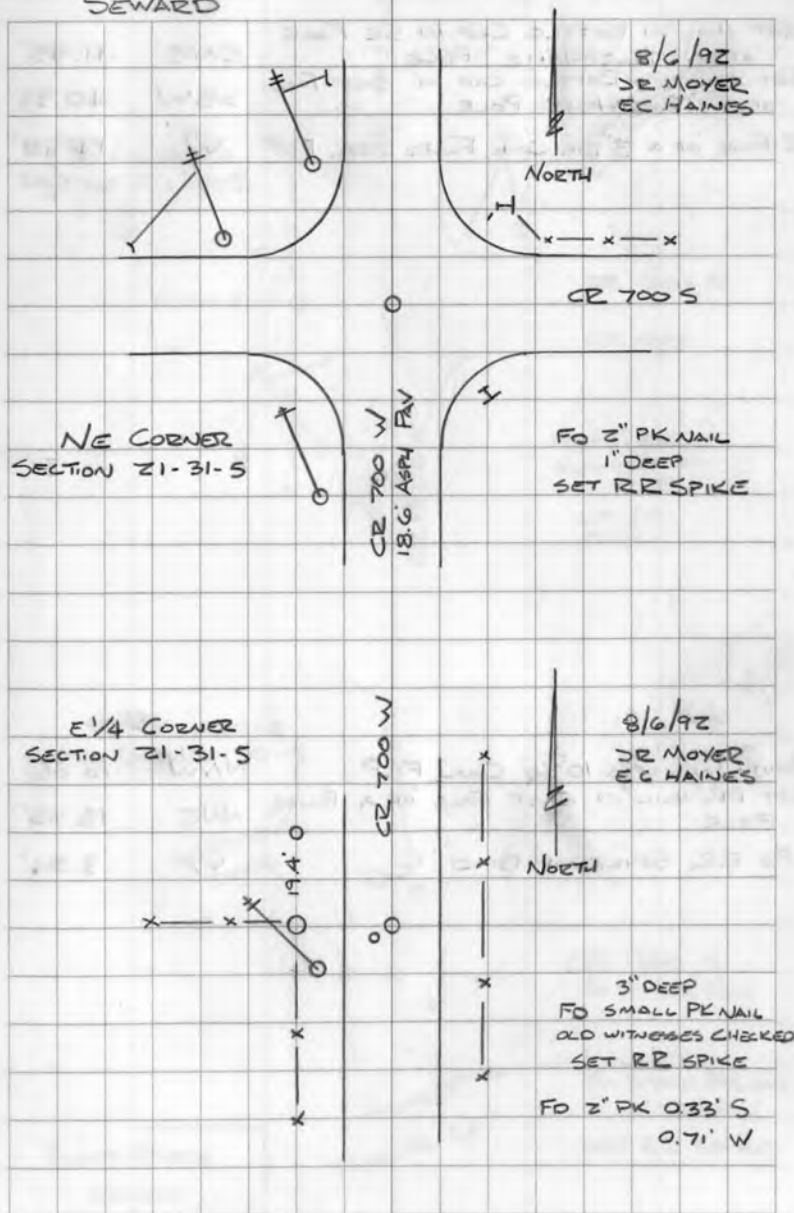


DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN SE FACE OF A TELEPHONE POLE	ENE	41.55'
SET NAIL IN BOTTLE CAP IN EAST FACE OF A TELEPHONE POLE	SSW	40.93'
E FACE OF A 3" DIA CONC. FILLED STEEL FCP	W	19.82'

SOUTH FACE OF A 10" SQ CONC FCP	NNW	18.86'
SET PK NAIL IN EAST FACE OF A POWER POLE	NNE	18.55'
FO RR SPIKE IN ROAD CL	W	3.06'

SEWARD

SW CORNER
SECTION 15-30-5

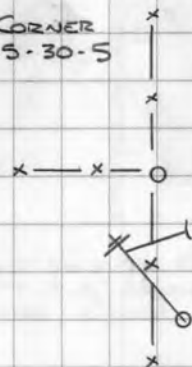

CR 700 W

CR 1500 E

CR 1300 S

CR 100 S

FO 1/2" REBAR
SET CAP

8/6/92
DR MOYER
EC HAINES

NORTH

S 1/4 CORNER
SECTION 15-30-5

LIMESTONE
DRIVE



NORTH

CR 1300 S
16.5' ASPH PAV.

8/6/92
DR MOYER
EC HAINES

SILVER CREEK
CHURCH
OF GOD

ASPHALT
PARKING LOT

FO SMALL PK NAIL
2" DEEP
SET RR SPIKE

DESCRIPTION	BEARING	DISTANCE
CENTER OF A CONC. STATE R/W MARKER	NNW	63.18'
SET NAIL IN BOTTLE CAP IN SE FACE OF A NIPSCO POWER POLE 631/363	NNE	62.31'
FO A 3/4" I.P.	E	63.91'

WAYNE

NW CORNER
SECTION 10-32-6

FO 7" SQ METAL BOX
WITH A 1/2" BRONZE ROD
INSIDE, 3" DEEP

HUSKY
TRAIL

NORTH

8/10/92
DR MOYER
E CHAINES

N 1/4 CORNER
SECTION 10-32-6


OUTLOT
RETENTION AREA

NORTH

8/10/92
DR MOYER
E CHAINES

WOOD FENCE CORNER
POST IS CALLED FOR IN
"PATTERSON PLACE"
PLAT BOOK 9 P. 46

NOT FOUND DUE TO
HIGH WATER

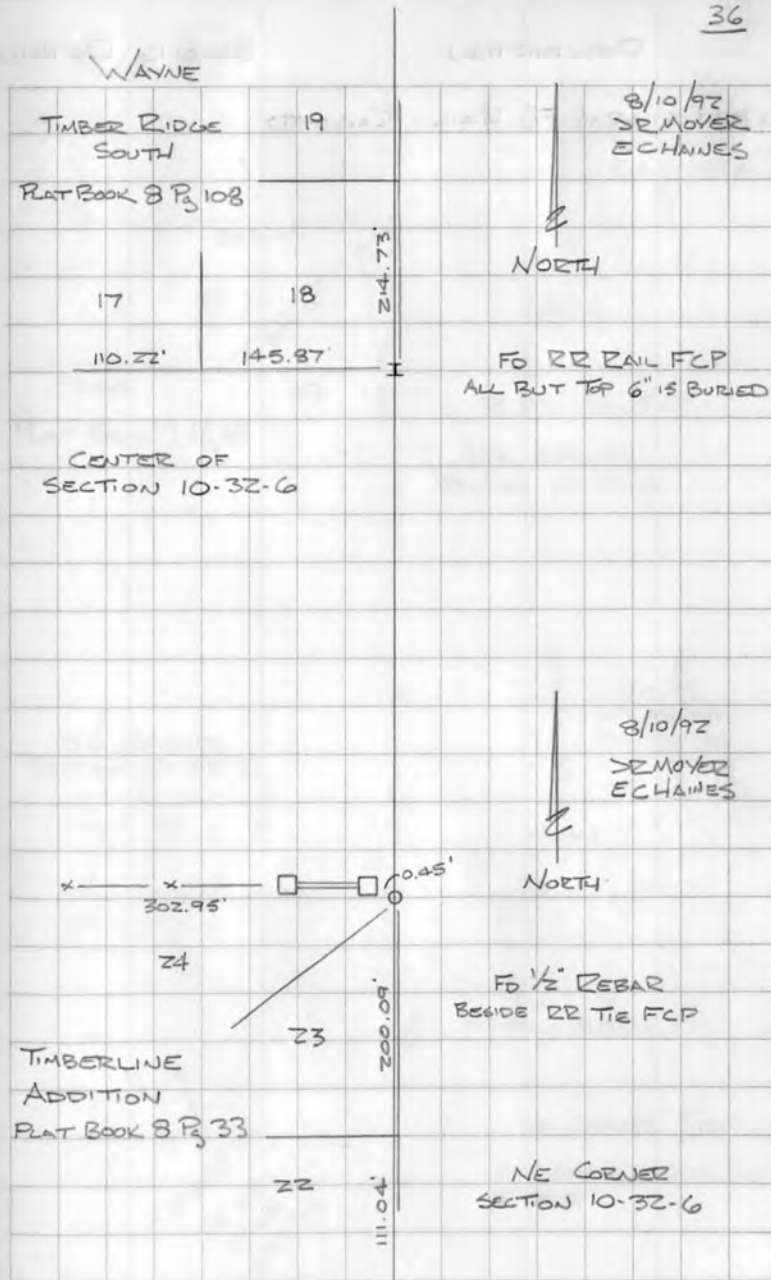[illegible]


DESCRIPTION

BEARING DISTANCE

10/12/17 SRM FO RAIL FLAGGED

37

WAYNE

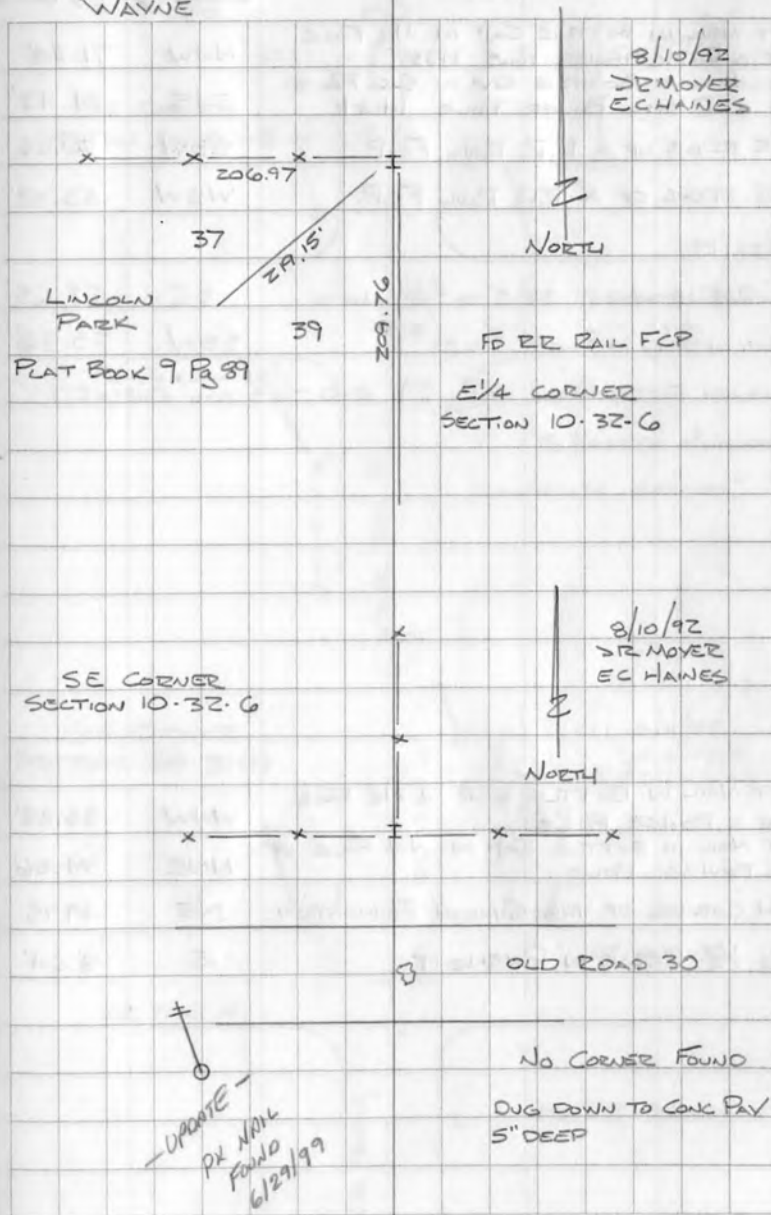

DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN NE FACE OF A REMC POWER POLE 1483	NNW	71.24'
FO NAIL IN BOTTLE CAP IN SE FACE OF A REMC POWER POLE 1484	ENE	51.47'
NE EDGE OF A RR RAIL FCP	SSW	70.65
NE EDGE OF A RR RAIL FCP	WSW	66.22'

2/27/17

1/2" REBAR W/CAP 25.5' TO E/P NORTH SE 52.65'


NAIL IN TAG IN POWER POLE SSW 75.36'

SURVEY FIELD BOOK 10 Pg 59 OLD TIES ALL CHECKED

6/25		
SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	WNW	41.13'
		36.88'
SET NAIL IN BOTTLE CAP IN NW FACE OF A POWER POLE	NNE	74.58'
		74.86'
SW CORNER OF THE CHURCH FOUNDATION	NE	49.95'
FO 1/2" REBAR IN PAVEMENT	E	8.64'

6/25/18 SRM - FO RR SPIKE 3" DEEP

FRANKLIN

SW CORNER
SECTION 6-30-5SW CORNER
SECTION 34-31-419.6454 PM
CR 1000 W

STATE ROAD 14

CR 900 E

CR 200 N

8/11/92
SR MOYER
EC HAINES

NORTH

STATE ROAD
14FO BRONZE MARKER
"LOWMAN'S CORNER"8/11/92
SR MOYER
EC HAINESOLIVE BETHEL
CHURCH
OF
GOD

CR 1000 S

FO RR SPIKE

DESCRIPTION	BEARING	DISTANCE
CENTER OF A RR RAIL FCP LEADING NORTH	NW	25.1'
SW CORNER OF AN 8" THICK (AT TOP) OF A 4' X 4' CONC FCP	E	15.00'
SE CORNER OF AN 8" THICK (AT TOP) OF A 4' X 4' CONC FCP	W	15.90'

6/25/18 SRM FOR RR SPIKE 3" DEEP


1/2" x 24" REBAR W/CAP	7.9' TO E/P	NW	34.02'
1/2" x 24" REBAR W/CAP	7.3' TO E/P	SE	27.45

SW CORNER OF A RR RAIL FCP	NNE	50.01'
SW CORNER OF A RR RAIL FCP	ENE	47.96'
SET NAIL IN BOTTLE CAP IN NORTH FACE OF A POWER POLE	SW	37.00'
		39.27'

6/25/18 SRM FOR RR SPIKE 6" DEEP

1/2" x 24" REBAR W/CAP	14' E OF E/P	NNE	46.56'
1/2" x 24" REBAR W/CAP		SE	42.38'

FRANKLIN

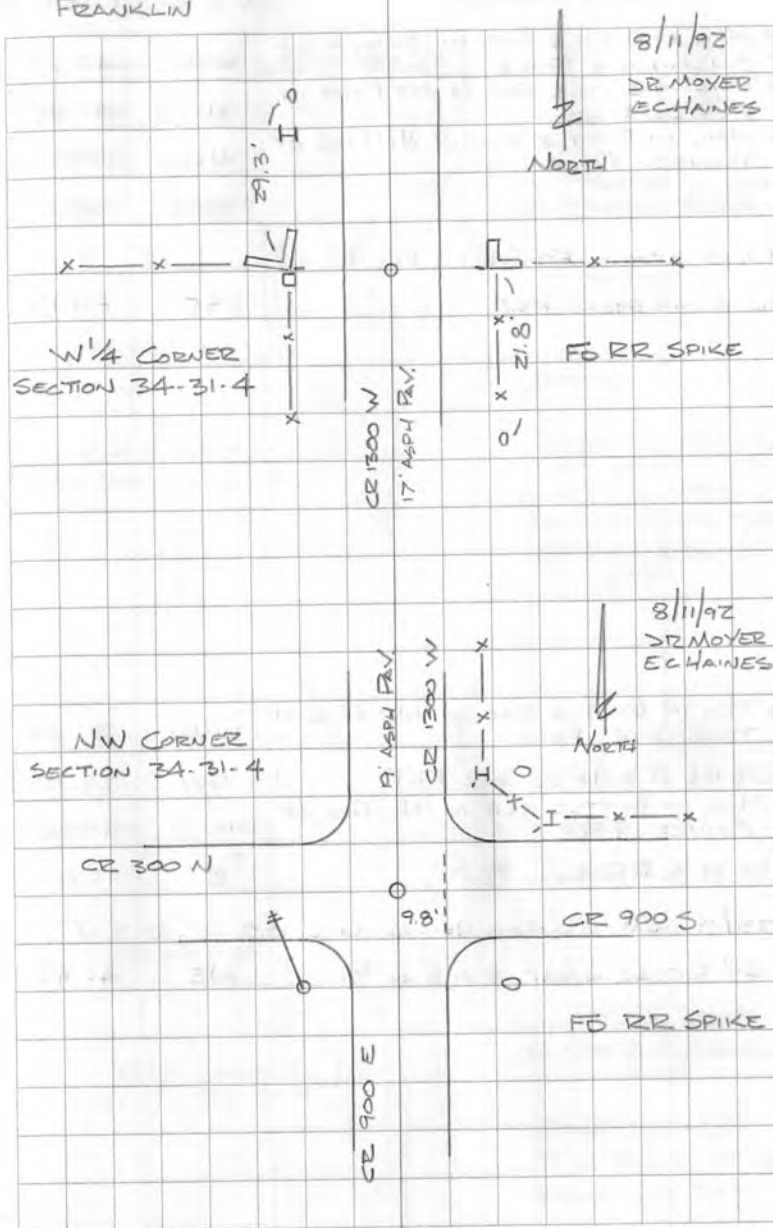

DESCRIPTION

BEARING DISTANCE

SET NAIL IN BOTTLE CAP IN SOUTH FACE
OF AN ANCHOR POLE ~~GOING~~ 2/8/02 ~~W~~WNW 47.25'
SET NAIL IN BOTTLE CAP IN NE FACE OF
A POWER POLE NNW 49.80'
SET NAIL IN BOTTLE CAP IN NW FACE OF
A POWER POLE NNE 49.00'
FACE 6" ROUND
FENCE CORNER POST ESE 49.19'

6/25/18 SEM - FD 1" IRON PIN FLUSH

FACE 6" DIA STEEL FCP SSE 54.15'

SET NAIL IN BOTTLE CAP IN NE FACE OF
A TELEPHONE POLE WINW 37.84'

SE CORNER OF A 16" SQ CONK FCP NW 23.10'✓


SET NAIL IN BOTTLE CAP IN NE FACE OF
A POWER POLE NNW 40.30'✓

CENTER OF A RR RAIL FCP E 17.07'✓

6/25/18 SEM - FD MAG NAIL NO TAG 0.3' W, 0.15' N

1/2" x 24" REBAR W/CAP 8.3' E OF E/P NE 41.42'

FRANKLIN

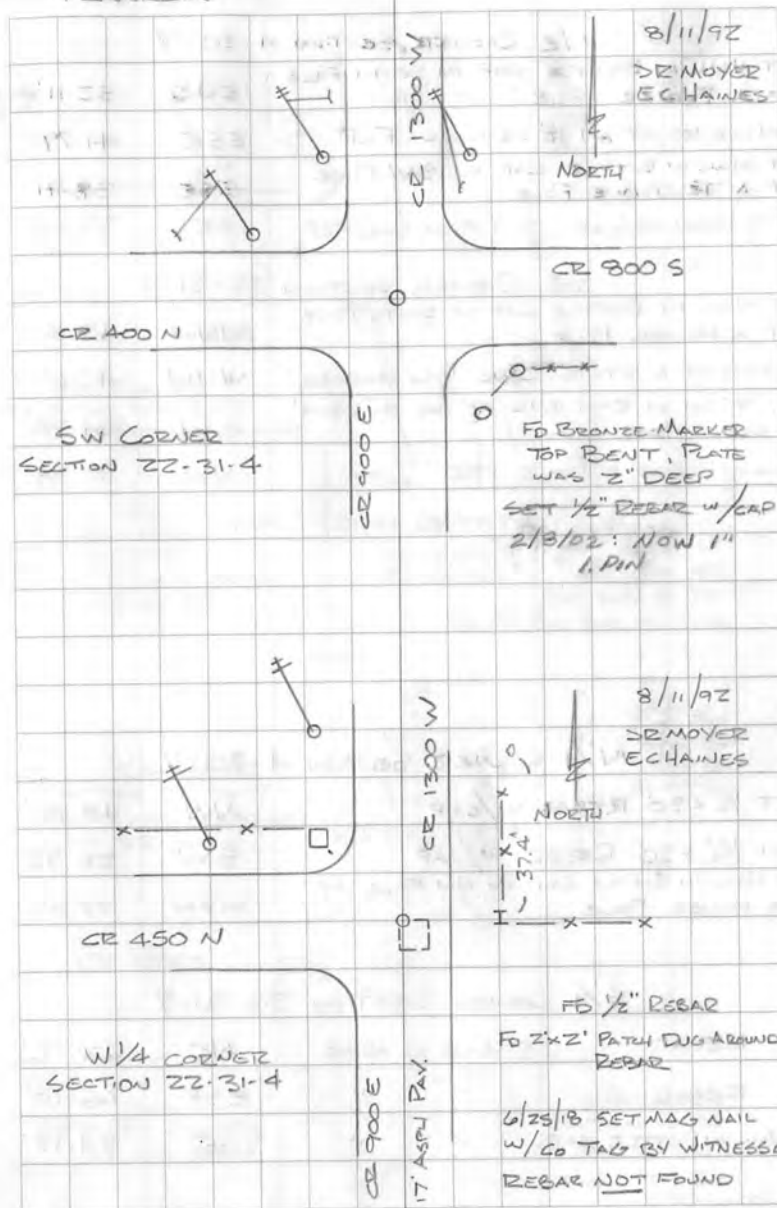

DESCRIPTION

BEARING

DISTANCE

NE CORNER SECTION 4-30-7

SET NAIL IN BOTTLE CAP IN SOUTH FACE
OF A POWER POLE

ENE

52.11'

NW CORNER OF AN 8'SQ CONC FCP

ESE

41.79'

SET NAIL IN BOTTLE CAP IN SW FACE
OF A TELEPHONE POLE~~ESE~~~~38.91~~

1/2" REBAR W/CAP 21.7' FROM CONC FCP

SE

37.28'

SE CORNER SECTION 33-31-7

SET NAIL IN BOTTLE CAP IN SOUTH FACE
OF A POWER POLE

WNW

43.56'

CENTER OF A STATE CONC. B/W MARKER

WNW

42.67'

SET "4" CUT IN EAST END OF AN 8" x 8.4"
CONC. HEADWALL~~SW~~~~24.77~~

NAIL IN B. CAP P. POLE PSI 111/677

NW

99.34

UPDATED 5/12/17 JRM

N 1/4 CORNER SECTION 4-30-7

SET 1/2" x 30" REBAR W/CAP

NN

40.06'

SET 1/2" x 30" REBAR W/CAP

SW

28.95'

SET NAIL IN BOTTLE CAP IN NW FACE OF
A POWER POLE

WSW

72.85'

S 1/4 CORNER SECTION 33-31-7

REBAR

SAME AS ABOVE

NE

62.12'

REBAR

"

"

ESE

66.10'

NAIL IN BOTTLE CAP

"


"

SSE

24.12'

JACKSON

41

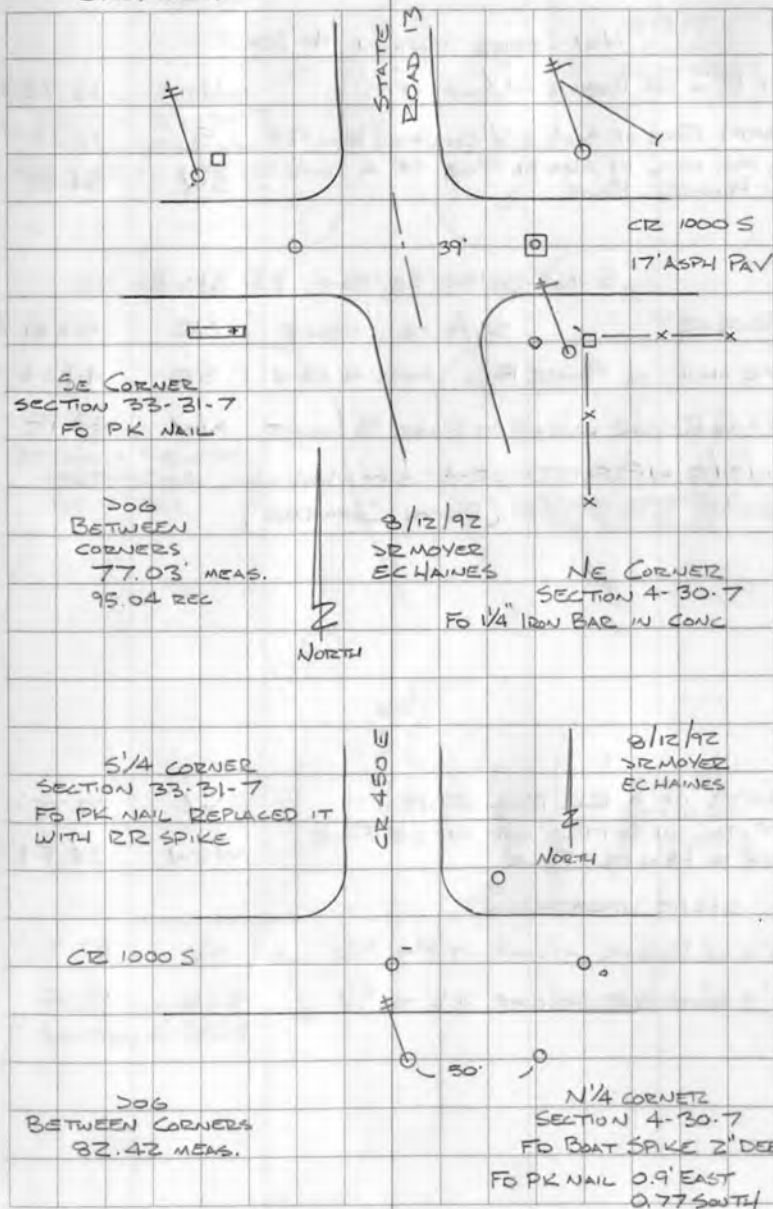

FO N
NIPS
CEN
FO N
NIPS
SW
1/2"

"
"

SET
NIP
SET
NIP
SET
OF

G/
P

DESCRIPTION BEARING DISTANCE

NW CORNER SECTION 4-30-7

SET 1/2" x 30" REBAR W/CAP (FD)	NW	46.72' ✓
NORTH FACE OF A 4" x 6" CHANNEL IRON FCP	S	21.05' ✓
FO PK NAIL IN NORTH FACE OF A POWER POLE	SW	54.59' ✓

SW CORNER SECTION 33-31-7

REBAR SAME AS ABOVE	NE	57.89' ✓
PK NAIL IN POWER POLE SAME AS ABOVE	SE	44.04' ✓
1/2" x 16" REBAR W/CAP AT BASE 18" LOCUST	NW	49.18'
6/2/17 UPDATED DRM - SET MAG NAIL W/CO TAG OVER RR SPIKE (BOTH CORNERS)		


CENTER OF A RR RAIL FCP	W	20.75' ✓
SET NAIL IN BOTTLE CAP IN SE FACE OF A POWER POLE	WSW	25.54' ✓

6/2/17 UPDATED

1/2" x 16" REBAR W/CAP 17.2' TO E/P	NE	37.72'
1/2" x 16" REBAR W/CAP 11.8' TO E/P	ESE	19.62'

JACKSON

42

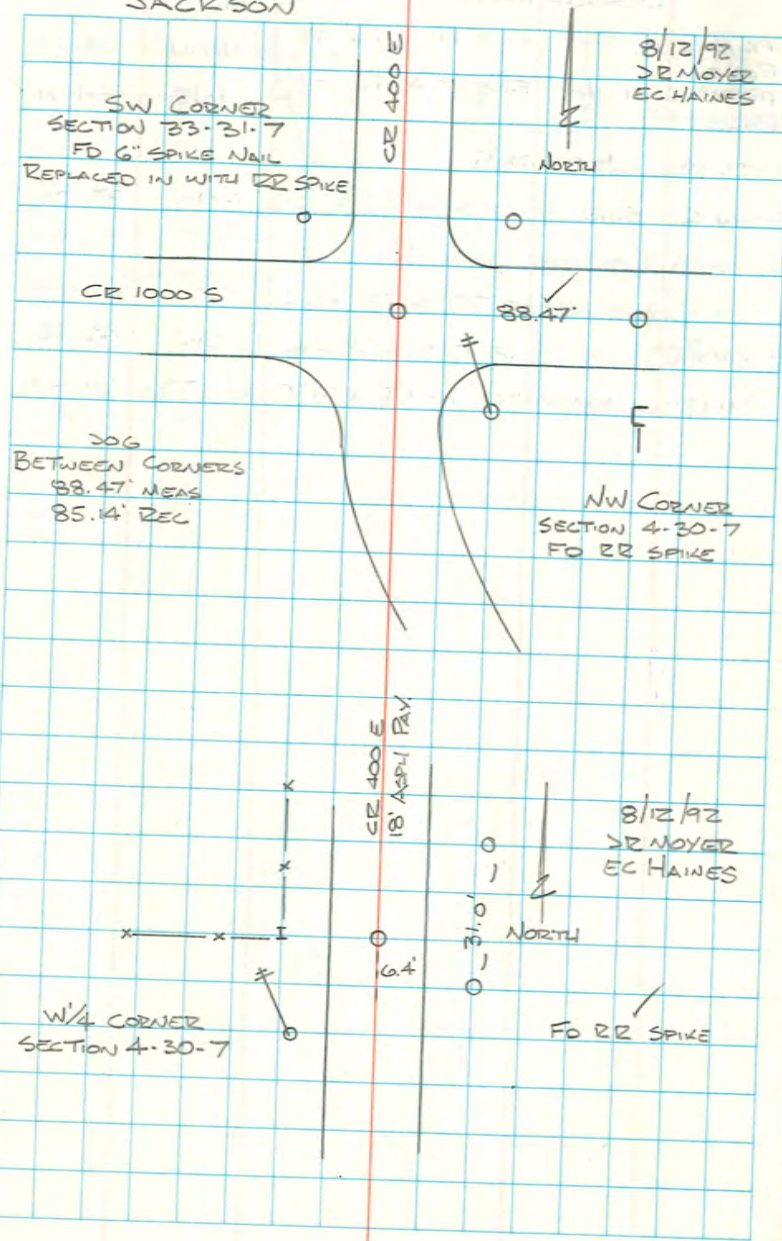

FO N
NIPS
CEN

FO N
NIPS

SW

1/2"

"

"

SET
NIP
SET
NIP
SET
OF

61

P

DESCRIPTION

BEARING DISTANCE

FO PK NAIL IN EAST FACE OF A POWER POLE NNW 58.40'

FO PK NAIL IN WEST FACE OF A POWER POLE NNE 54.61'

UPDATED 6/2/17 JRM

NAIL IN CO. SURVEYOR TAG IN POWER POLE NNW 58.46'

NAIL IN CO. SURVEYOR TAG IN POWER POLE NE 56.49'

1/2" X 1/6" REBAR W/CAP 27' TO E/P 400E SE 61.64'

1/2" X 1/6" REBAR W/CAP 13.5' TO E/P 400E SW 46.22'

9/1/20 JRM MNH FO 1" PIN IN CONC TIES CHECKED

43

JACKSON

8/12/92

REMOVER
ECHAINES

NORTH

20.1' ASPH PAV.

STATE ROAD
14


SW CORNER
SECTION 4-30-7

GR 400 E

PHONE BOX
FO 5/8" REBAR
IN CONC

FO MAG NAIL FLUSH

DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN SW FACE OF A POWER POLE	WNW	74.21'
SET NAIL IN BOTTLE CAP IN SE FACE OF AN REMC POWER POLE 1808	ENE	56.55'
SET NAIL IN BOTTLE CAP IN NW FACE OF A TELEPHONE POLE	SW	27.45'
CENTER OF A RR RAIL FCP	S	16.61'
3/29/17 JRM FO MAG NAIL		
1/2" REBAR W/CAP 8.7 TO E/P 33.1 TO FCP	SW	36.95'
NAIL IN B. CAP IN POWER POLE	WNW	49.11'
RR RAIL FCP	NNW	43.68'
NAIL IN B. CAP IN POWER POLE	NNW	80.38'
NW CORNER 5"x10" B. BEAM FCP	ENE	42.60'
SET NAIL IN BOTTLE CAP IN SOUTH FACE OF A POWER POLE	WNW	68.28'
SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	NNW	39.85'
SET NAIL IN BOTTLE CAP IN SOUTH FACE OF AN REMC POWER POLE 1745	ENE	89.60'
2/8/17		
SET NAIL IN TAG IN POWER POLE	ENE	76.12'
1/2" REBAR W/CAP 8' TO E/P	SE	39.87'

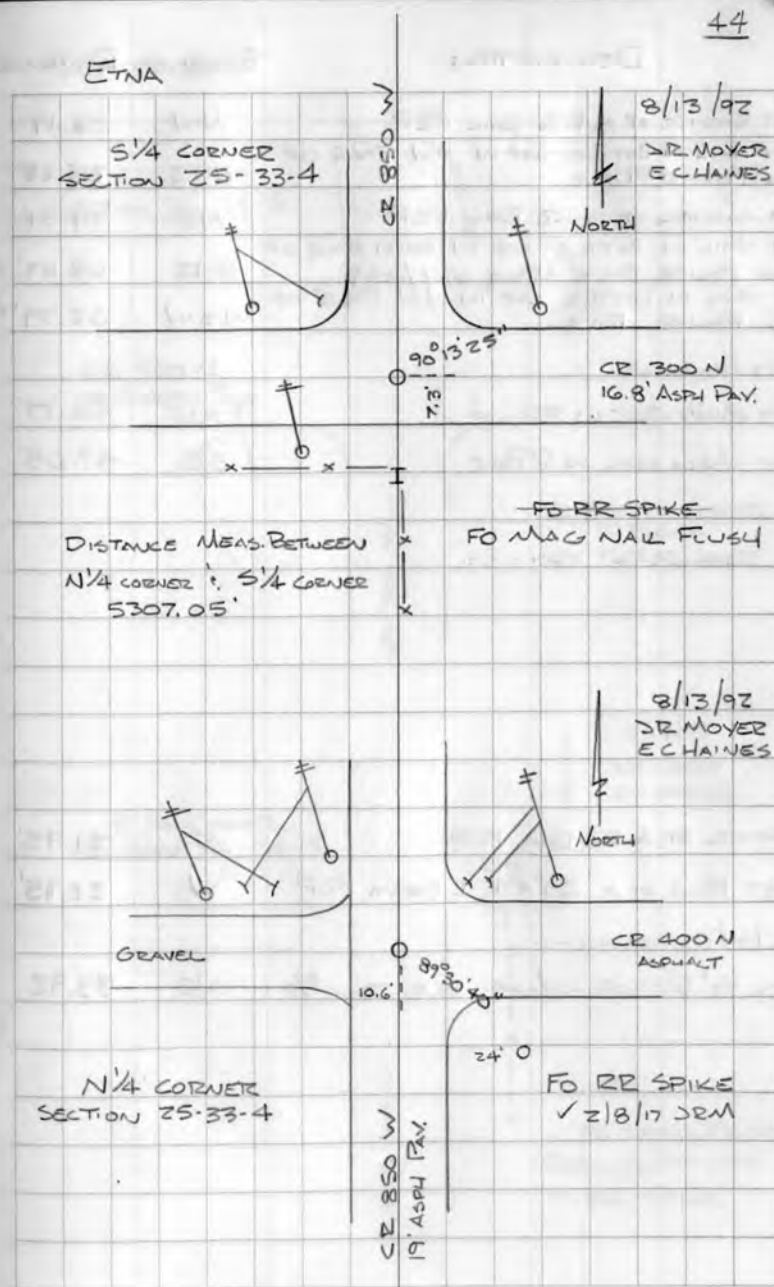

DESCRIPTION	BEARING	DISTANCE
SE CORNER OF A RR RAIL FCP	NW	28.49'
SET NAIL IN BOTTLE CAP IN NW FACE OF A POWER POLE	NNE	35.68'
SW CORNER OF A RR RAIL FCP	NE	29.51'
SET NAIL IN BOTTLE CAP IN SOUTH FACE OF A POWER POLE N.F. 60 G37/OBS	ENE	68.03' ✓
SET NAIL IN BOTTLE CAP IN NW FACE OF A POWER POLE	WSW	62.79' ✓

6/7/16 SRM

SET MAG NAIL IN P. POLE

NE 54.17'

SET MAG NAIL IN P. POLE

SE 47.65'

CENTER OF A RR RAIL FCP

E 21.95'

EAST FACE OF A 2 1/2" x 4" I BEAM FCP

W 21.95'

6/7/16 SRM

SET 1/2" REBAR W/ CAP 10.8' FROM E/P

NE 33.92'

JEFFERSON

SE CORNER
SECTION 26-34-S

CR 900 N
20.4' ASPH P.V.

E 1/4 CORNER
SECTION 26-34-S

8/13/92

DE MOYER
ECHAINES

NORTH

FO BRONZE MARKER
3" DEEP
SET PK NAIL OVER

8/13/92

DE MOYER
ECHAINES

NORTH

FO SMALL PK NAIL
REPLACED IT WITH
A RR SPIKE

DESCRIPTION

BEARING DISTANCE

SE CORNER OF A RR RAIL FCP — NW — 28.78'
 CENTER OF A RR RAIL FCP E 20.03'
 SET NAIL IN BOTTLE CAP IN SW FACE OF A POWER POLE — ESE — 18.74'

6/26/18 SRM - FO BRONZE MONUMENT FLUSH

1/2" x 24" REBAR W/CAP 21.2' W OF E/P WSW 34.43'

1/2" x 24" REBAR W/CAP 7.7' E OF E/P SE 34.14'

SOUTH FACE OF A RR RAIL FCP N 19.98'

NE CORNER OF A RR RAIL FCP SW 27.96'

SET NAIL IN BOTTLE CAP IN NW FACE OF A POWER POLE — SW — 29.72'

6/26/18 SRM

NAIL IN B. CAP IN POWER POLE SSE 74.00'

NAIL IN B. CAP IN POWER POLE ESE 67.59'

JEFFERSON

NE CORNER SECTION 26-34-5

CR 1000 N GRAVEL

CR 300 W 18.7' ASPH PAV.

8/13/97

DR MOYER
 EC HAINES

NORTH

FO BRONZE MARKER
 2" DEEP

CR 1050 N
 20.2' ASPH PAV.

FO RR SPIKE
 3" DEEP
 SET PK NAIL OVER

FO PK OVER SPIKE 6/26/18

E 1/4 CORNER SECTION 23-34-5


CR 300 W

DESCRIPTION	BEARING	DISTANCE
CENTER OF MERIDIAN OF US 30	N	89.1'
CENTER OF A CONC MON. WITH A BRONZE DISK STAMPED KOS F40 1DOT	ESE	107.97'
SET NAIL IN BOTTLE CAP IN NE FACE OF A METER BOX POLE	SSW	110.84'
6/29/17		
1/2" x 16" REBAR w/CAP	SE	56.72'
1/2" x 16" REBAR w/CAP	ENE	57.92'
2" DIA STEEL FCP	SW	99.1'
FO MAG NAIL / TAG FLUSH		

SET NAIL IN BOTTLE CAP IN SW FACE OF AN ANCHOR POLE	WNW	57.08'
FO NAIL IN TAG ON TOP OF A 12" DIA FCP	NW	42.66'
SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	ESE	38.27'
SET NAIL IN BOTTLE CAP IN W FACE OF A POWER POLE	SSE	72.55'

6/29/17		
1/2" x 16" REBAR w/CAP 13' TO E/P 300N	WSW	69.22'
1/2" x 16" REBAR w/CAP 21.3' TO E/P 200W	SW	67.25'
FO MAG NAIL IN P. POLE LOWER ONE OF TWO	NE	68.22'

PRAIRIE

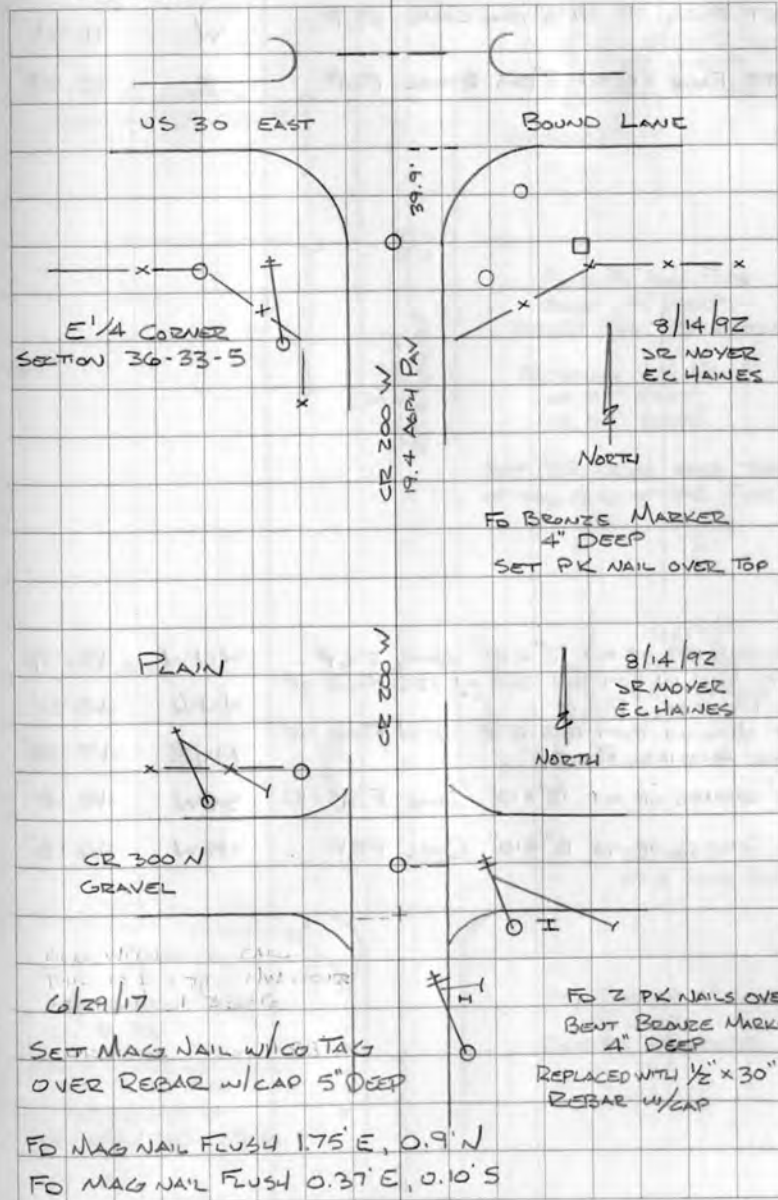


DESCRIPTION	BEARING	DISTANCE
EAST FACE OF AN 8" DIA CONC FCP	W	21.54'
WEST FACE OF AN 2" DIA STEEL FCP	E	20.57'
8/16/18 SRM FOR RR SPIKE		
NAIL IN B. CAP NIPSCO POLE 1070/274	NW	41.50'
FACE OF A 12" X 15" CONC FCP	E	20.45'
1/2" X 24" REBAR W/CAP 8.7' TO E/P REBAR 58.5' SOUTH OF POLE	SW	26.55'

SE CORNER OF AN 12" X 10" CONC FCP	WNW	45.89'
SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	NNW	45.21'
SET NAIL IN BOTTLE CAP IN W FACE OF AN ANCHOR POLE	NNE	47.04'
NE CORNER OF AN 12" X 10" CONC FCP	SSW	48.60' ✓
NE CORNER OF AN 12" X 10" CONC FCP	WSW	46.18' ✓
8/14/18 SRM		
NAIL IN B. CAP IN POWER POLE	NNE	72.50'
1/2" X 24" REBAR W/CAP	NW	46.27'

PRAIRIE

48

W 1/4 CORNER
SECTION 25-33-5

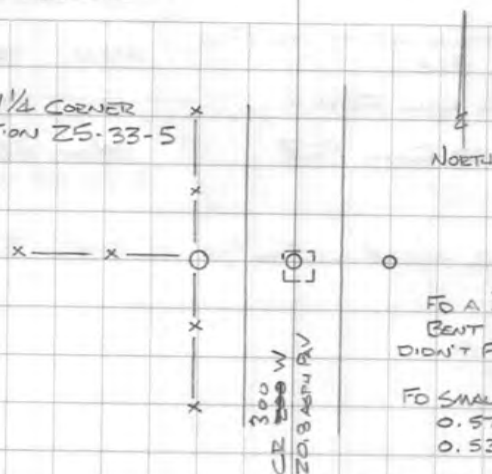


FO A 3/4" IRON PIPE
BENT 12" DEEP
DIDN'T FIND STONE UNDER

FO SMALL PK NAIL
0.57' EAST
0.53' SOUTH

SET RR SPIKE OVER TOP
OF THE END OF THE PIPE

PLAIN

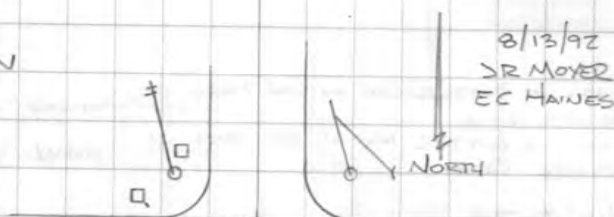

CE 400 N
20.8' ASPH Pk.

OLD WITNESSES CALL
THIS TO BE THE
NW CORNER OF
SECTION 30-33-6

FO BRONZE MARKER
3" DEEP
SET PK NAIL OVER

DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	NNW	57.93'
CENTER OF A RR RAIL FCP	E	15.98'
EAST FACE OF A RR RAIL FCP	W	19.25'
8/14/18 SEM		
1/2" x 24" REBAR W/CAP 10' TO E/P	SW	33.77'

SET NAIL IN BOTTLE CAP IN SW FACE OF A POWER POLE	WNW	47.96'
SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	NNW	67.67'
8/14/18 SEM		

NAIL IN B. CAP IN POWER POLE	SSW	55.42'
NAIL IN B. CAP IN POWER POLE	NE	57.68'
NAIL IN B. CAP IN POWER POLE	WSW	68.20'

PRAIRIE

E 1/4 CORNER
SECTION 24-33-5

X X X H
NS
O

OLD WITNESSES CALL
THIS TO BE THE NE
CORNER OF SECTION
24-33-5

CR 200 W
18.7 ASPR FRY

CR 200 W

NORTH

FB RR SPIKE
2" DEEP
4' DEEP

NORTH

CR 500 N
GRAVEL



FB BRONZE MARKER
TOP ABOUT 5" DEEP
REPLACED WITH 1/2" x 30"
REBAR W/CAP
FB REBAR 8/14/18

DESCRIPTION	BEARING	DISTANCE
FO PK NAIL IN SOUTH FACE OF A POWER POLE	WNW	62.21'
FO PK NAIL IN WEST FACE OF A POWER POLE	NNE	61.67'
2/1/16		
SET 1/2" REBAR W/CAP 1.7' WEST OF I-BEAM FCP	ESE	59.87'
SET 1/2" REBAR W/CAP 2.7' NORTH OF I-BEAM FCP	SSE	58.34'
FO PK NAIL IN WEST FACE OF A POWER POLE	NNE	60.51'

CENTER OF A RR RAIL FCP	WNW	24.32'
FO SMALL PK NAIL IN WEST FACE OF A NIPSCO POWER POLE 691/712	NNE	72.92'
FO SMALL PK NAIL IN SOUTH FACE OF A NIPSCO POWER POLE 1062/704	ENE	83.94'


11/2/15 DR MOYER FO HARRISON MONUMENT	FLUSH	
CENTER OF A RR RAIL FCP	W	24.63'
FO MAG NAIL IN NE FACE OF A WOOD FENCE POST	SSE	51.80'

SCOTT

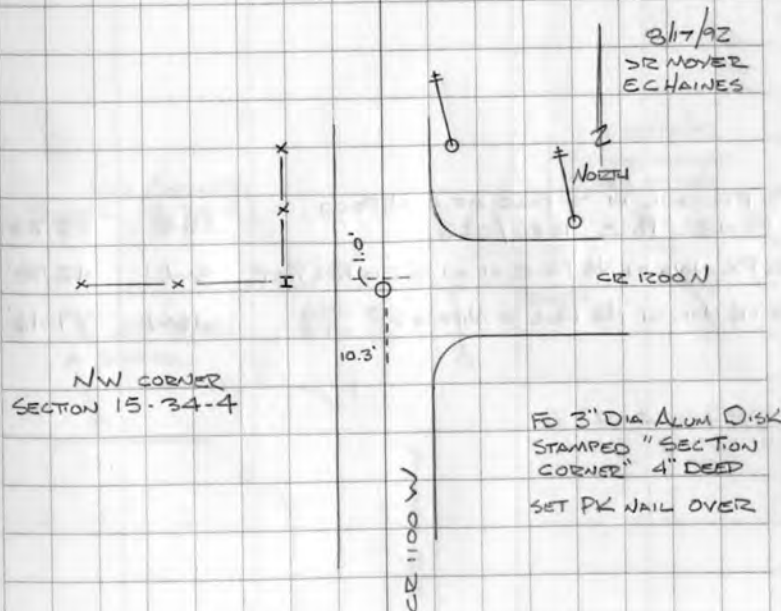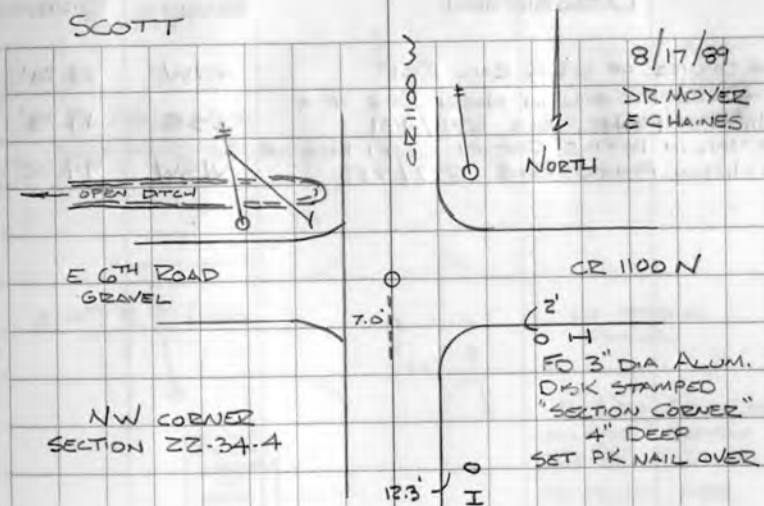

DESCRIPTION	BEARING	DISTANCE
SE CORNER OF A RR RAIL FCP	NNW	53.20'
FO SMALL PK NAIL IN NORTH FACE OF A NIPSCO POWER POLE 678/431	ESE	49.78' //
SET NAIL IN BOTTLE CAP IN SOUTH FACE OF A NIPSCO POWER POLE 677/733	WSW	94.02' //
8/20/18 JRM		
USC & GS BM 4170 1946	SE	50.16


FO PK NAIL IN W FACE OF A NIPSCO POWER POLE 1056/028	ESE	25.16' 25.20'
FO PK NAIL IN NE FACE OF AN 8" DIA. FEN. POST	SW	42.90'
FO PK NAIL IN NE FACE OF NIPSCO PD 1056 048	WSW	79.46' 79.51'

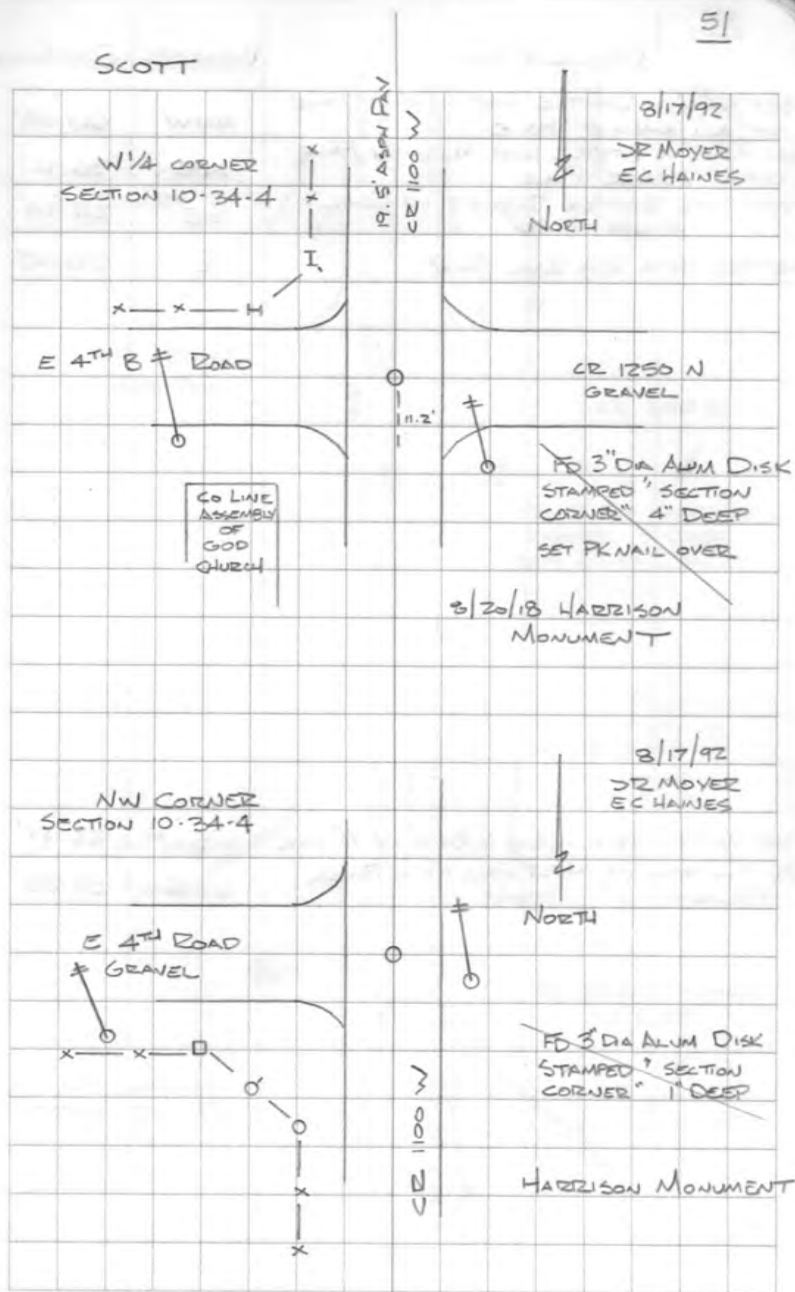

DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN EAST FACE OF AN ANCHOR POLE	NNW	60.09'
SET NAIL IN BOTTLE CAP IN SOUTH FACE OF A POWER POLE	NE	36.41'
USC & GS BRONZE TABLET IN CONC. E 164 1946	SE	24.94'
CENTER OF A RR RAIL FCP	S	20.42'

SET 1/2" x 30" REBAR W/CAP @ BASE OF 18" OAK	WSW	22.47'
FO PK NAIL IN WEST FACE OF A POWER POLE	SSE	59.22'

TIPPECANOE

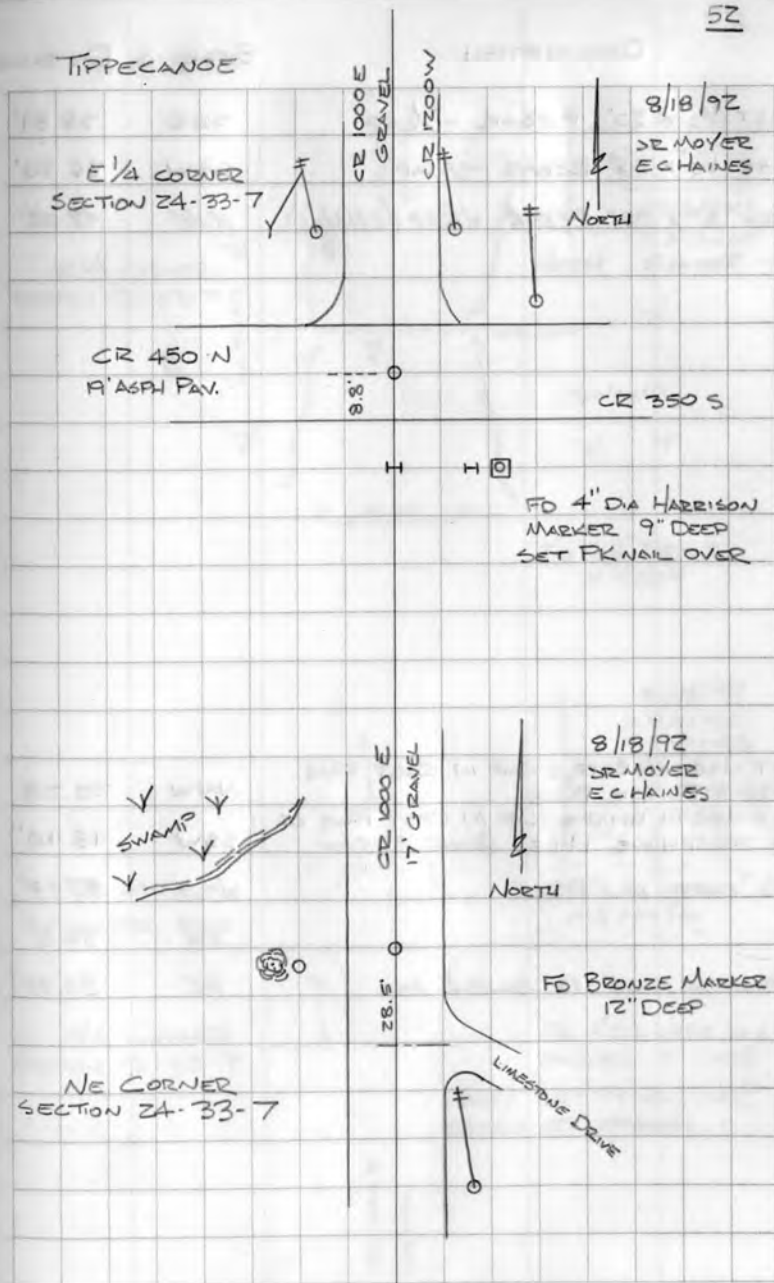

FO N
NIPS

CEU

FO N
NIPS

SW

1/2"

"

"

SET
NIPSSET
NIPSSET
OF

G/

P2

DESCRIPTION

BEARING DISTANCE

SET NAIL IN BOTTLE CAP IN EAST FACE OF
AN REAR POWER POLE 4035

NW

34.93'

SW CORNER OF A RR RAIL FCP ~~GONE~~

NE

27.30'

3/8/16 SRM

NAIL IN BOTTLE CAP IN W FACE OF P. POLE

NW

36.52' ✓

1/2" REBAR W/CAP 2.9' SOUTH OF CONE POST

SW

31.68' ✓

1/2" REBAR W/CAP 9.4' FROM E/P CR 500 E

SE

37.08'

6/8/21 SRM MWH

1/2" x 24" BAR W/CAP

SE

37.13'

SET 1/2" x 30" REBAR W/CAP ~~GONE~~

NW

37.68'

FO PK NAIL IN SW FACE OF A POWER POLE

SW

27.34'

3/8/16 SRM

1/2" REBAR W/CAP 20' FROM E/P CR 500 E

NW

44.38'

1/2" REBAR W/CAP 19.3' FROM E/P CR 500 E

NE

34.03'

NAIL IN BOTTLE CAP SE FACE OF P. POLE

SW

29.42'

6/8/21 SRM MWH

1/2" x 24" REBAR W/CAP

SE

39.06'

TURKEY CREEK

54

8/18/72

SR MOYER
EC HAINES

NORTH

EMS LANE 16

QUAKER HAVEN CAMP

CR 900 N

GRAVEL

7.6

CR 500 E
20.8 ASPH PAVNE CORNER
SECTION 31-34-7FO BRONZE MARKER
5" DEEP
SET PK NAIL OVER
FO PK 3" DEEP 3/8/16

8/18/92

SR MOYER
EC HAINES

NORTH

E 1/4 CORNER
SECTION 30-34-7

CR 950 N

GRAVEL

12.5'

EMS LANE 15

CR 500 E
21 ASPH PAVFO 3/4" IRON BAR
6" DEEP
SET PK NAIL OVERFO MAG NAIL
4" DEEP 3/8/16

FO N
NIP
CEN
FO N
NIP
- SW
1/2
"
"

SET
NIP
SET
NIP
SET
OF


6/
P2

DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN SW FACE OF A POWER POLE	NNW	43.55'
SET NAIL IN BOTTLE CAP IN NORTH FACE OF A POWER POLE	WSW	51.34'
7/23/19 SR MOYER		86.61'
NAIL IN B. CAP POWER POLE	ESE	57.37'
6/2/21 SRM MWH		
1/2" x 24" REBAR w/CAP 7.5' TO E/P	SW	37.02'

7/23/19 SR MOYER	FO REBAR FLUSH	
1/2" x 24" REBAR w/CAP 6.7' TO E/P	NW	28.97'
1/2" x 24" REBAR w/CAP 7.1' TO E/P	NE	38.45'
6/2/21 SRM MWH		
1/2" x 24" REBAR w/CAP 6' TO E/P	SE	53.72'

TURKEY CREEK

55

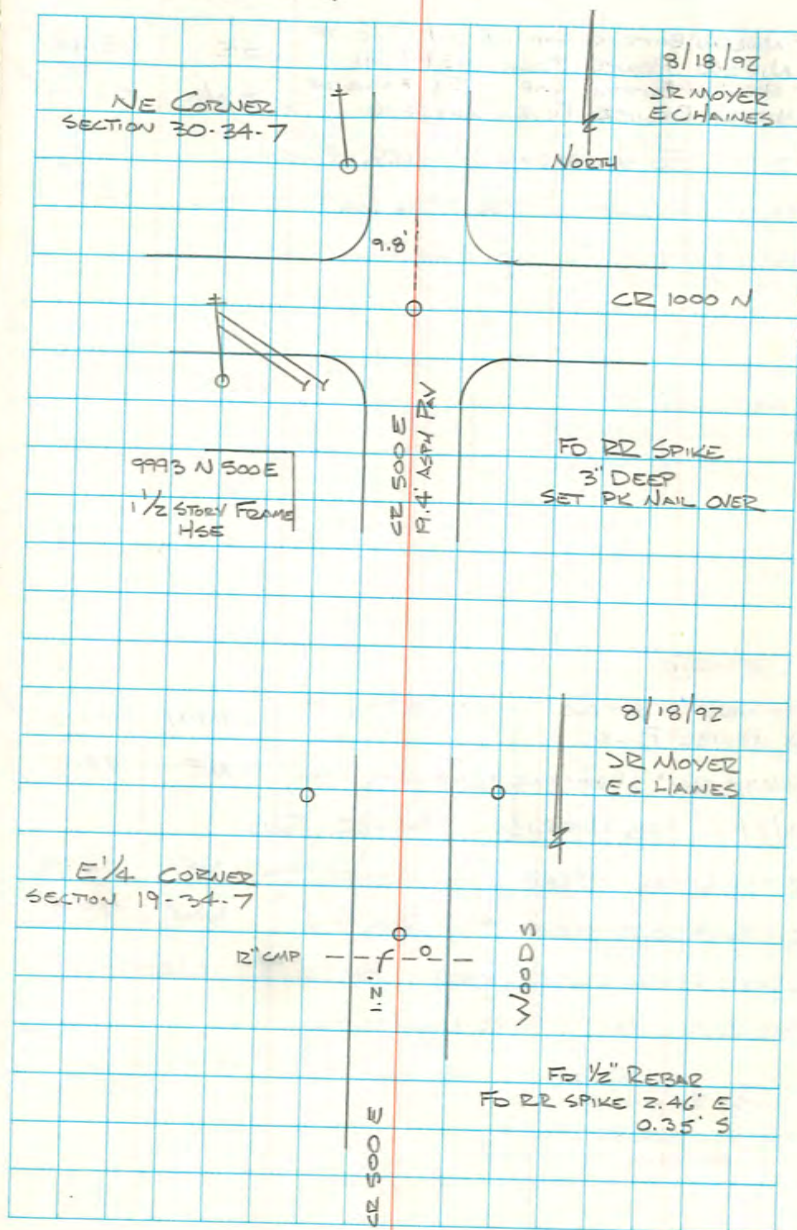


DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN SW FACE OF A NIPSCO POWER POLE 634/341	SE	65.41'
SET NAIL IN BOTTLE CAP IN SE FACE OF A NIPSCO POWER POLE 634/340	SW	53.98'
8/2/17 FO HARRISON MARKER FLUSH		
FO PK NAIL W/CAP IN FIBER OPTIC POST	N	42.47'

SET NAIL IN BOTTLE CAP IN SW FACE OF A POWER POLE	NNW	102.05' ✓
NEAREST EDGE 5" DIA. CONG. FILLED STEEL FCP	NE	57.63'
8/2/17 FO HARRISON MARKER FLUSH		
1/2" x 16" REBAR W/CAP 1.0' SOUTH OF WALL	NE	52.04
1/2" x 16" REBAR W/CAP 48.8' FROM POLE	NW	73.17'

WAYNE

S 1/4 CORNER
SECTION 11-32-6

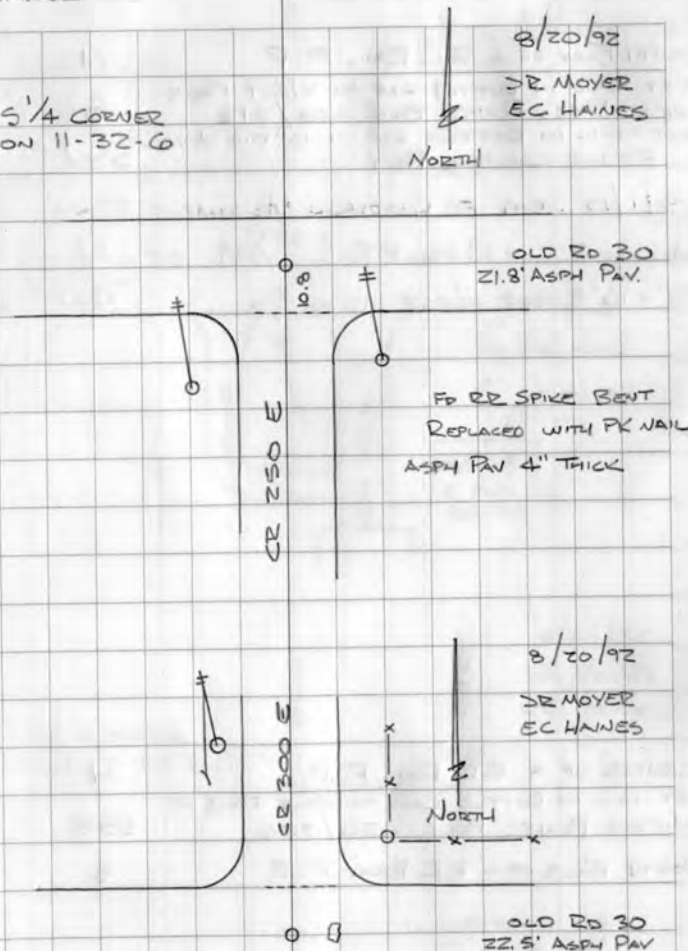

SE CORNER
SECTION 11-32-6

FO PK NAIL
REPLACED WITH RR SPIKE
STONG READING IN PAV
8.1' EAST MORE THAN 6"
DEEP

DESCRIPTION	BEARING	DISTANCE
		50.23'
SOUTH FACE OF A RR RAIL FCP	N	50.37'
SET NAIL IN BOTTLE CAP IN WEST FACE OF A NIPSCO POWER POLE 626/546	S	49.12' ✓
SET NAIL IN BOTTLE CAP IN 10" DIA WOOD FENCE CORNER POST	SW	60.47'
		60.63'

9/1/17 JRM FO HARRISON MONUMENT FLUSH

NAIL IN B. CAP NIPSCO P. POLE 637/239 N 52.98'

1/2" x 16" REBAR N/CAP 13' TO E/P NW 67.68'

CENTER OF A RR RAIL FCP	N	50.24'
SET NAIL IN BOTTLE CAP IN EAST FACE OF NIPSCO POWER POLE 626/706	SSE	46.84'
NORTH FACE OF A RR RAIL FCP	S	50.05'


ALSO SEE
SECTION CORNER "C"
BOOK PG 535

WAYNE

S 1/4 CORNER
SECTION 12-32-6

0 64.5'

OLD ROAD 30
21.7' ASPH PAV

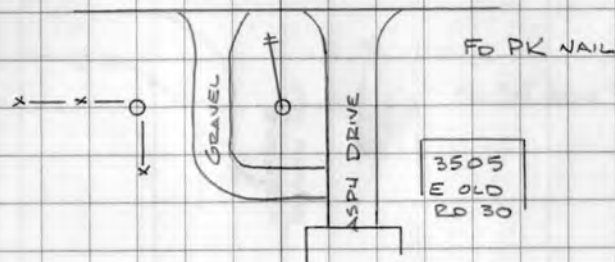

8/20/12

DR MOYER
EC HAINES

NORTH

SE CORNER
SECTION 12-32-6

NORTH

8/20/12

DR MOYER
EC HAINES

OLD ROAD 30
22' ASPH PAV

FO VERY SMALL PK NAIL
REPLACED WITH 1/2" x 3" PK

DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN SW FACE OF A POWER POLE	SSE	65.23'
SET NAIL IN BOTTLE CAP IN NW FACE OF A RR TIE FENCE POST	SW	55.10'

SET NAIL IN BOTTLE CAP IN EAST FACE OF A TELEPHONE POLE	W ^{GONE} SW	35.55'
SET NAIL IN BOTTLE CAP IN EAST FACE OF A POWER POLE	S	15.00'


1/2" REBAR W/CAP 14.6' FROM E/P	SE	32.71
SW CORNER PORCH FOUNDATION	NE	81.69'

FIELD SURVEY BOOK 5 R 15 12/16/1971

MONROE

E 1/4 CORNER
SECTION 4-31-7

CR 450 S




CR 500 E
18' ASPH PAV

NORTH

FO 3/4" IRON PIPE

SE CORNER
SECTION 4-31-7



CR 500 E

NORTH

8/21/92
DR MOYER
EC HAINES

CR 500 S

FO BRONZE MARKER

FO 1/2" BOLT 2" DEEP
6.6' EAST
2.9' NORTH

DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	NW	30.03'
SW CORNER OF A RR RAIL FCP	NE	30.08'
NW CORNER OF A 12" SQ CONC FCP	SE	28.83'
NE CORNER OF A 12" SQ CONC. FCP	SW	28.90'


UPDATED 4/17/17 JRM IN
FIELD BOOK 6 Pg 62

SET NAIL IN BOTTLE CAP IN NE FACE OF AN REMC POWER POLE 0181	SE	27.56'
SET NAIL IN BOTTLE CAP IN SW FACE OF AN REMC POWER POLE 0182	SSE	35.08'

1/17/17 JRM

1/2" REBAR W/CAP 18.5' TO E/P 700W	NE	37.27'
------------------------------------	----	--------


PRAIRIE

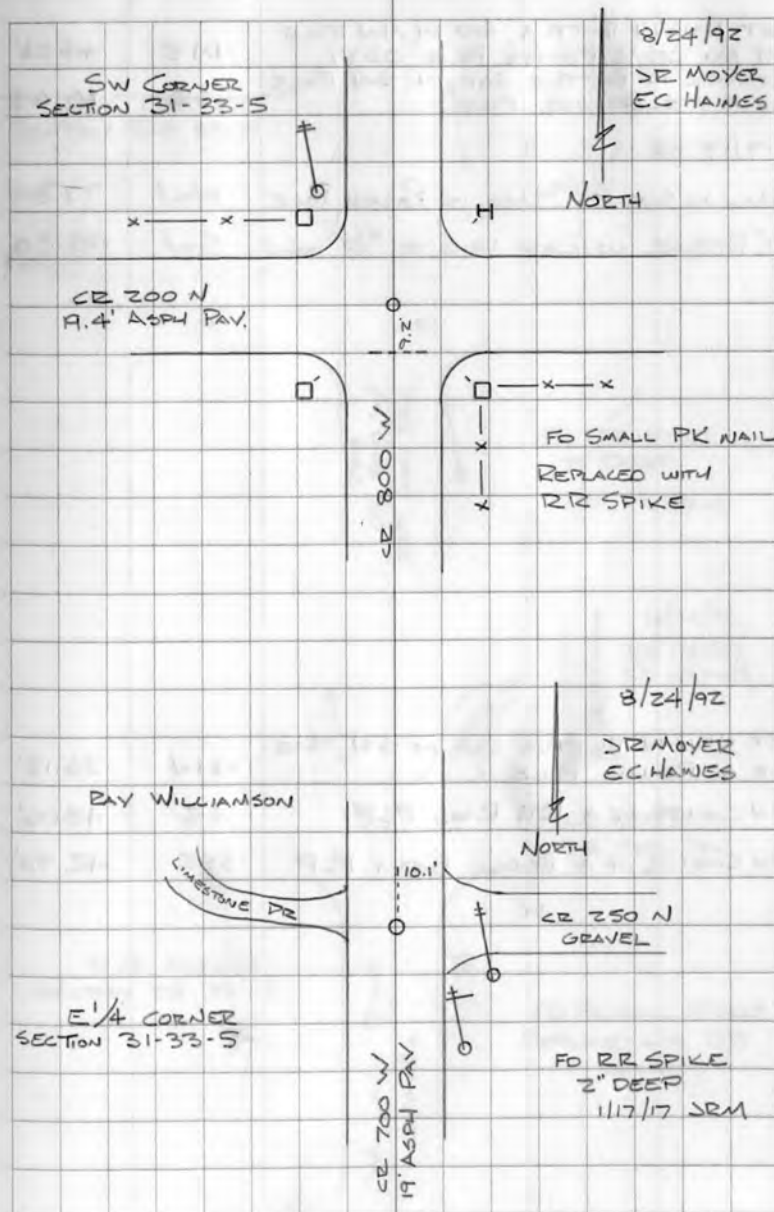

DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN NW FACE OF AN RE/MC POWER POLE 0037	NNE	44.24'
SET NAIL IN BOTTLE CAP IN SW FACE OF A TELEPHONE POLE	SSE	40.65'
1/17/17 SRM		
NAIL IN SURVEY TAG IN POWER POLE	NW	77.84'
1/2" REBAR W/CAP 14.6' TO E/P 400N	SW	44.30'

SET NAIL IN BOTTLE CAP IN SW FACE OF A POWER POLE	GONE NNW	26.12'
NW CORNER OF A RR RAIL FCP	SE	42.06'
NW CORNER OF A BRIDGE BEAM FCP	SSE	42.50'
2/13/18		
NAIL IN SURVEYORS TAG IN POWER POLE	WSW	51.72'
NAIL IN B. CAP IN POWER POLE	NW	27.38'

PRAIRIE

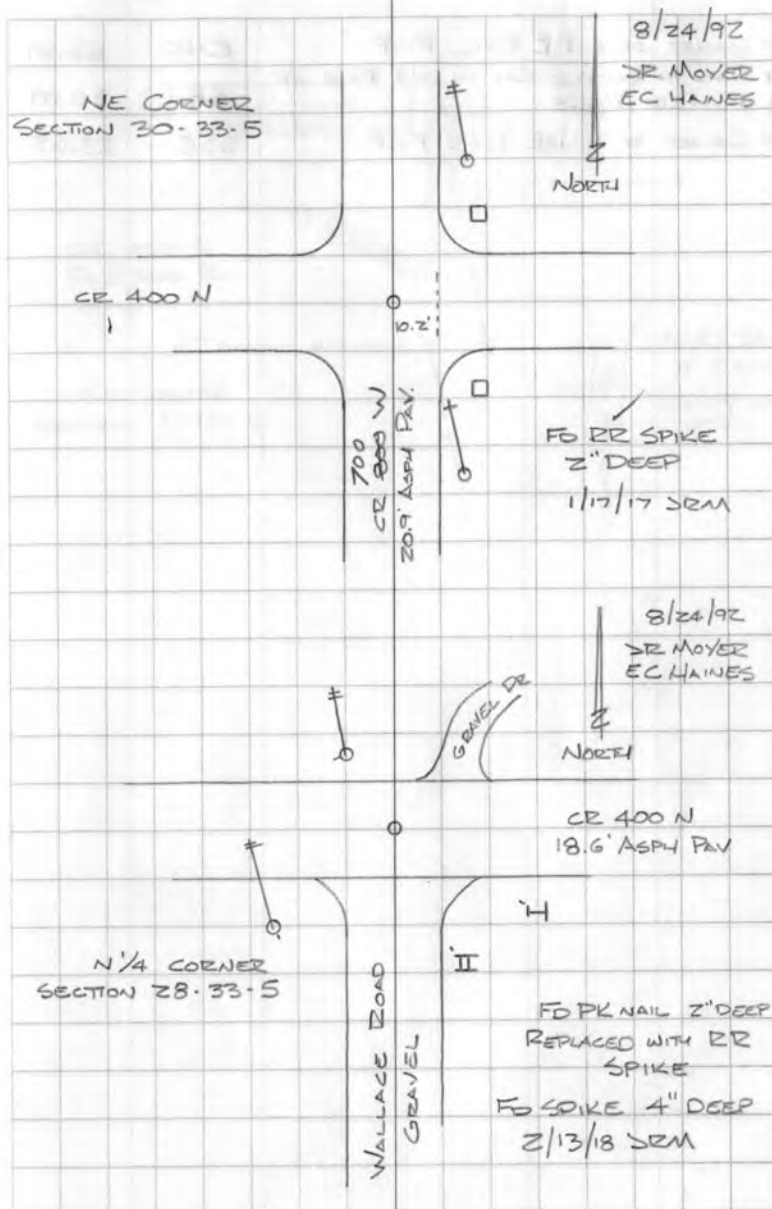

DESCRIPTION

BEARING DISTANCE


SW CORNER OF A RR RAIL FCP	ENE	66.89'
SET NAIL IN BOTTLE CAP IN NE FACE OF A POWER POLE	SE	25.09'
NW CORNER OF A RR RAIL FCP	SSE	23.65'

-2/26/18

NAIL IN B. CAP IN POWER POLE	SE	26.04'
1/2" REBAR W/ CAP IN FENCE 9.2' TO E/P	SW	37.15'


CLAY

61

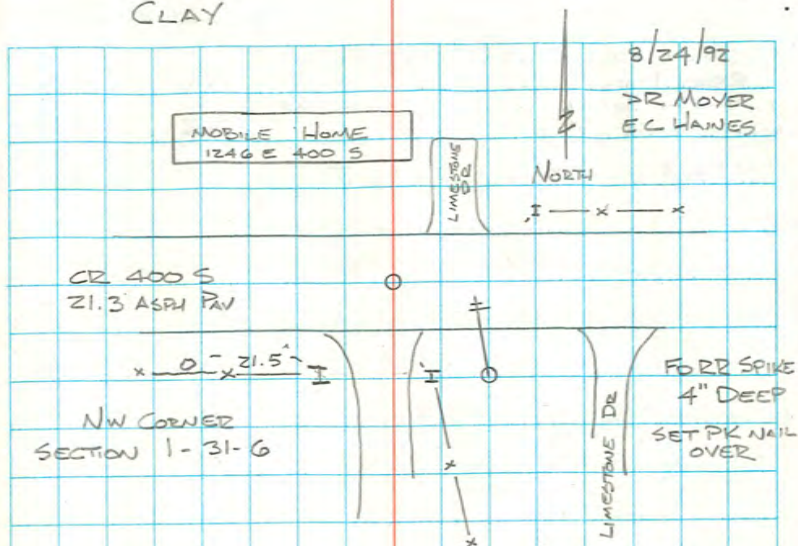

12/26/18 JRM - FD MAG NAIL NO TAG 2" DEEP

DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN WEST FACE OF A REMC POWER POLE 0706	NW	47.44'
SET NAIL IN BOTTLE CAP IN SE FACE OF AN ANCHOR POLE	NE	33.20'
NW FACE OF A 5" DIA STEEL FCP	SE	24.57'✓
9/29/16 REMOVER FO RR SPIKE		
SET NAIL IN B. CAP IN REMC POLE 0706	NW	47.36'
SET NAIL IN B. CAP IN REMC ANCHOR POLE	NE	33.52'
£ RR RAIL FCP	SSW	55.46'
SET NAIL IN B. CAP IN REMC POLE	SW	73.40'
£ RR RAIL FCP	NW	53.8'
SET NAIL IN BOTTLE CAP IN NE FACE OF AN REMC POWER POLE 0719	WNW	16.90'
SET NAIL IN BOTTLE CAP IN NORTH FACE OF A POWER POLE	ESE	81.82'
9/29/16 REMOVER FO SPIKE SET MAG NAIL IN WASHER		
FO NAIL IN B. CAP IN REMC POLE	WNW	16.73'
FO NAIL IN B. CAP IN POWER POLE	ESE	81.84'
£ RR RAIL FCP	NE	55.8'
£ RR RAIL FCP	SSE	55.84'
£ RR RAIL FCP	SE	54.1'

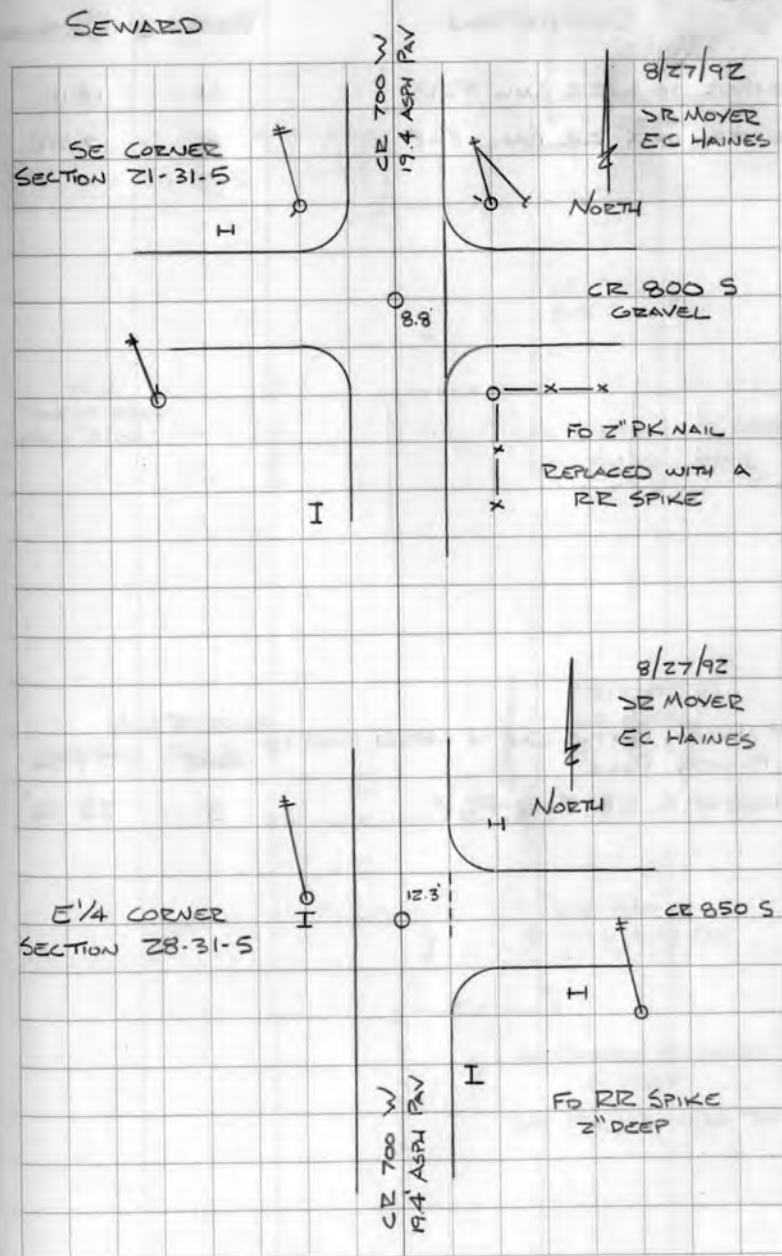


DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN NE FACE OF A NIPSCO LIGHT POLE 613/893	WNW	66.48'
SET NAIL IN BOTTLE CAP IN NE FACE OF A NIPSCO LIGHT POLE 615/880	ESE	70.44'
FO PK NAIL EAST FACE OF A NIPSCO POWER POLE 618/422	SW	52.91'

SEE UPDATED
INFO. IN SEC. COR.
BOOK PAGE 337
DATED 8/06 199 MK

SET NAIL IN BOTTLE CAP IN NE FACE OF A NIPSCO POWER POLE 621/045	NW	28.62'
CENTER OF THE VALVE NUT ON TOP OF THE FIRE HYD.	SW	30.10'
C OF THE MAIN LINE RAILROAD TRACK	E	108.7'
C OF THE RAILROAD SIDING	E	9.61'

LAKE

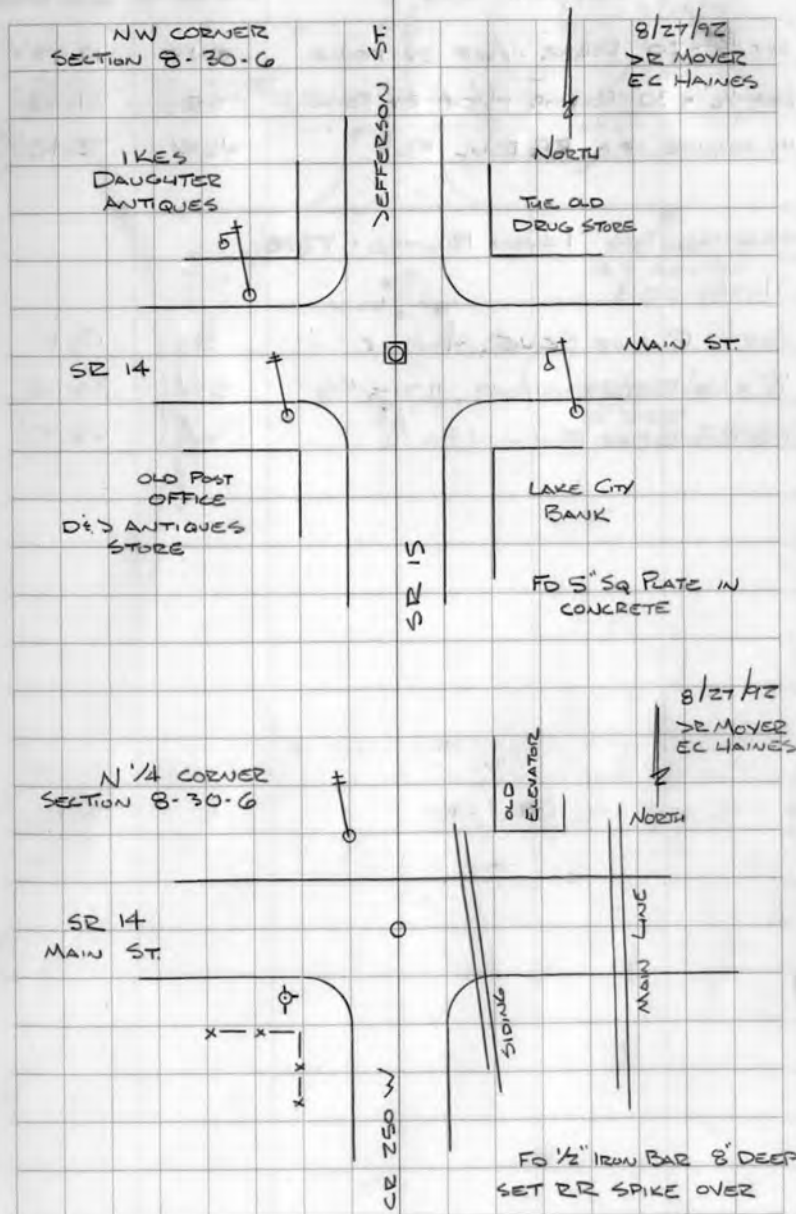

DESCRIPTION	BEARING	DISTANCE
SET $\frac{1}{2}$ " $\times$ 30" REBAR W/CAP BY FENCE	ENE	49.97'
SET $\frac{1}{2}$ " $\times$ 30" REBAR W/CAP BY FENCE ONE	SE	21.63'
NE CORNER OF A RR RAIL FCP	WSW	72.42'

ORIGINAL DOG 1 CHAIN 18 LINKS = 77.88'

9/27/17 JRM

NORTH RIM OF SEWER MANHOLE	S	13.4'
$\frac{1}{2}$ " $\times$ 16" REBAR W/CAP 11.7' TO E/P	SW	36.06'
FO RR SPIKE FLUSH IN RO C	W	68.77'

TIPPECANOE

SE CORNER
SECTION 32-33-7

CR 600 E
GRAVEL

8/28/92
DR MOYER
EC HAINES

NORTH

CR 200 N
15.5' ASPH PAV

37.88'

7.8'

LIMESTONE LAKE

FO RR SPIKE
2" DEEP
FO RR SPIKE 9/27/17


DESCRIPTION	BEARING	DISTANCE
SET NAIL IN BOTTLE CAP IN NW FACE OF A POWER POLE	NNE	43.00' ✓
SW CORNER OF A RR RAIL FCP GONE	NE	27.83'
SET NAIL IN BOTTLE CAP IN SOUTH FACE OF A POWER POLE	ENE	69.72' ✓

SET NAIL IN BOTTLE CAP IN WEST FACE OF A POWER POLE	SSW	19.85' ✓
CENTER OF A RR RAIL FCP	S	20.02' ✓

6/12/18 JRM		
NAIL IN B. CAP IN POWER POLE	WNW	58.10'


HARRISON

66

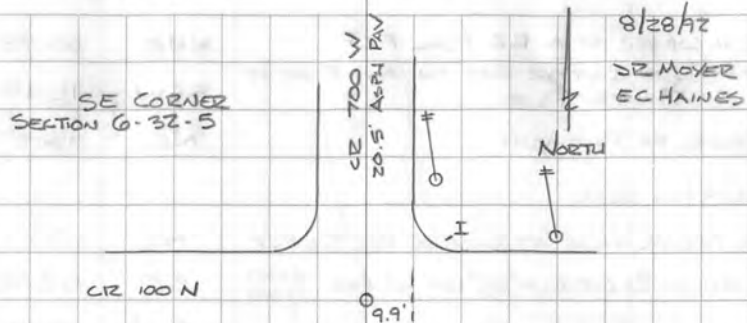

10/13/16
FO BRONZE MARKER
SET MAG NAIL W/WASHER
OVER

FO BRONZE MARKER
4" DEEP
SET PK NAIL OVER TOP

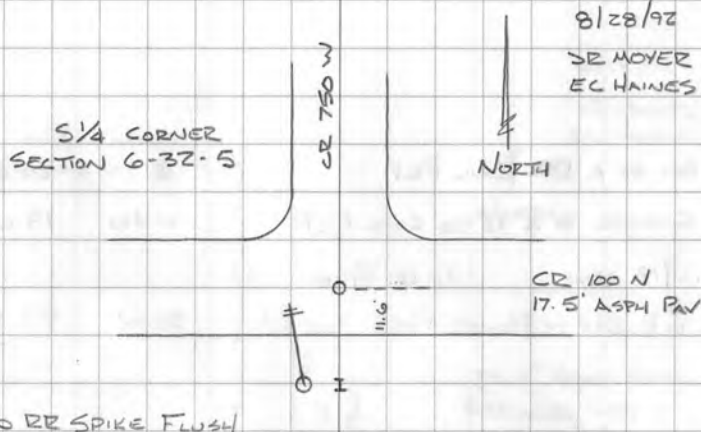

DESCRIPTION

BEARING DISTANCE

PK NAIL IN WEST FACE OF POWER POLE SE 24.82'
 PK NAIL IN EAST FACE OF POWER POLE NNW 58.78'

3/19/15 M KISSINGER

FO PK NAIL IN EAST FACE OF POWER POLE NNW 65.94'
 SET 1/2" REBAR WITH "KOS CO WITNESS" CAP NE 42.85'
 SET 1/2" REBAR WITH "KOS CO WITNESS" CAP ESE 29.75' 40.55"
 FO RR SPIKE IN CR 500 N SSE 26.14"
 SET 1/2" REBAR WITH "KOS CO WITNESS" CAP SW 64.24'
 FO RR POST LEAVING BADLEY NW 30.92'
 FO BRONZE MARKER NNE 9.49'
 FO SMALL BOAT SPIKE NE OF STONE 4.69 N 1.33 E

TIPPECANOE

SECTION 14


7/24/95

R KEMPER

M KISSINGER

SE CORNER

SECTION 14-33-7

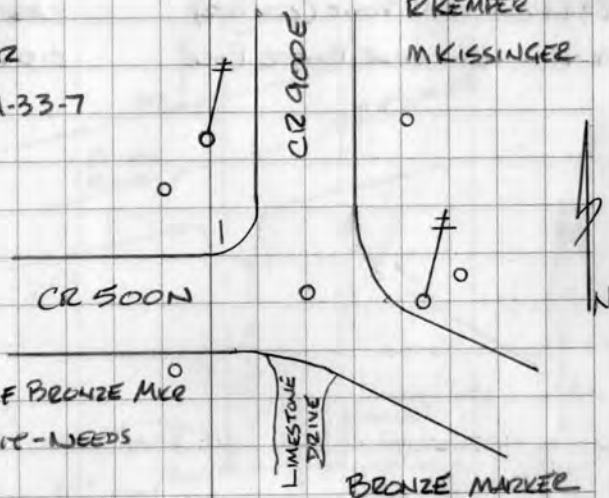

NOTE: TOP OF BRONZE MKR
 HAS BEEN HIT - NEEDS
 REPLACED.

3/19/15 FO STONE 2' DEEP AS NOTED ON PLAT
 OF BACKWATERS GARDENS SURVEY RECORD BOOK
 3 P. 45

10/1/15 SET MAG NAIL OVER STONE DR MOVER

7/7/16 SET HARRISON MONUMENT OVER STONE DRM

DESCRIPTION	BEARING	DISTANCE
RAILROAD IRON POST (CENTER)	EAST	12.00'
PK NAIL WEST FACE POWER POLE	SSW	45.95'

HARRISON

S 1/4 CORNER

27-32-5



DESCRIPTION	BEARING	DISTANCE
FACE RIP	SW	39.90'
PK IN ROUND WOOD POST	WNW	41.65'
NW COR NW POST SALEM CEMETERY	ENE	36.21'
GATE ENTRANCE		
2/11/16 DEM		
SET 1/2" REBAR W/CAP 1.5' WEST OF NW GATE POST	NE	35.48'
SET NAIL IN BOTTLE CAP IN NW FACE P. POLE	WSW	39.63'
BENCHMARK TABLET IN CONC POST	NE	48.24'
TT 11 DWP 1948		

FACE CONC. CORNER POST	SSW	20.30'
PK NAIL SE FACE POWER POLE	NNW	71.07'

VAN BUREN

SE CORNER 27-34-6

FO PK NAIL
FLUSH
2/11/16 DEM

SW CORNER 27-34-6

GRAVEL SURFACE

SECTION 27

a/26/95

R KEMPER

M KISSINGER

2 CAST IRON
FENCE

CR 900N

F CHURCH

BRONZE MARKER

FOUND TO 30'

a/27/95

R KEMPER

M KISSINGER

PK NAIL

CR 900N

DESCRIPTION	BEARING	DISTANCE
FACE RR RAIL POST	WEST	20.05'
FACE RR RAIL POST	EAST	20.10'

ETNA

3/28/96

N 1/4 POST 15-33-4

 R KEMP
 A KISSINGER
 M MONTEL

FENCE

FENCE

IRON PIN (BRONZE MKR)


FLUSH W/ PAVEMENT

ST 2019

THIS LOCATION
 NEEDS CHECKED -
 MAY BE IN ERROR!

RK 1/8/02

DESCRIPTION	BEARING	DISTANCE
1/2" REBAR W/ PLASTIC CAP	NORTH	39.12'
PK W/ PLASTIC CAP IN NE FACE NIPSCO POLE # 629/125	SE	72.85'
GONE 8/06 NOW "MAG" NAIL		72.90'
NW COR. CONC. BASE OF TRAFFIC LIGHT POLE	SOUTH	62.25'
"X" IN SW COR. CONC. BASE OF TRAFFIC LIGHT POLE	N-NW	62.05'

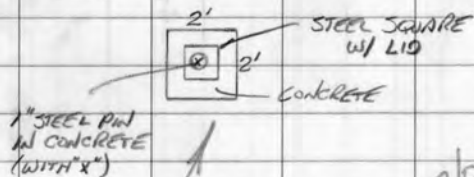

PLAN

SECTION 29

3/1/99

M. KISSINGER

CENTER OF SECTION
29-33-6